

## Clavo

### Flood/Spike light



### Features

- 12# Die-casting dark grey powder coated aluminum
- Tempered glass.T=3mm
- Constant Voltage Input,Constant Current Output
- Gasket: Tooling shaped seal Gasket



Surface



IP Rating  
IP66



IK Rating  
IK06





Standard Warranty

## TECHNICAL DATA SHEET - CLAVO - 15122 - FLOOD/SPIKE LIGHT



### TECHNICAL DATA

|                               |                                          |
|-------------------------------|------------------------------------------|
| Product Data                  | Flood/Spike Light                        |
| Lamp Type                     | OSRAM LED                                |
| Wattage                       | 20W                                      |
| Color Temperature             | 3000K                                    |
| Rated Luminaire Luminous Flux | 1,800lm                                  |
| Rated Luminaire Efficiency    | 90lm/W                                   |
| IP Rating                     | 66                                       |
| Beam Angle                    | 45°                                      |
| Voltage                       | AC220-240V                               |
| Frequency Range               | 50-60 Hz                                 |
| CRI                           | Ra>80                                    |
| Power Factor                  | >0.9                                     |
| Lens                          | B33D                                     |
| Operating Current             | 101mA                                    |
| IK Rating                     | 06                                       |
| Safety Class                  | Class I                                  |
| Operating Temperature         | -20°C ~+50°C                             |
| Material                      | Aluminium Body                           |
| Finish                        | Dark Grey                                |
| Life Span                     | 50,000 Hours                             |
| Warranty                      | 5 Years                                  |
| Applications                  | Outdoors, Residential, Hospitality, etc. |

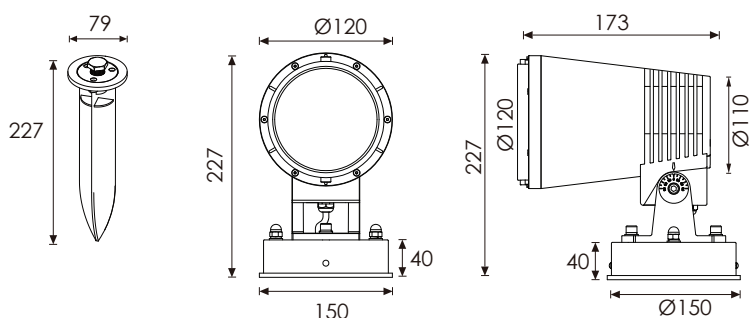

Unit: mm

### Lux distance cure

| Illuminance at a distance |             |                   |      |  |
|---------------------------|-------------|-------------------|------|--|
| Center beam LUX           |             | Beam width        |      |  |
|                           |             | V                 | H    |  |
| 2m                        | 2163.93 LUX | 0.8m              | 0.8m |  |
| 4m                        | 540.98 LUX  | 1.6m              | 1.6m |  |
| 6m                        | 240.44 LUX  | 2.5m              | 2.4m |  |
| 8m                        | 135.25 LUX  | 3.3m              | 3.2m |  |
| 10m                       | 86.56 LUX   | 4.1m              | 4.0m |  |
| 12m                       | 60.11 LUX   | 4.9m              | 4.8m |  |
| Ver.Spread:23.2           |             | Horiz.Spread:22.8 |      |  |

### TECHNICAL OPTIONS

|                   |                                 |
|-------------------|---------------------------------|
| Wattage           | 6W / 12W / 40W                  |
| Color Temperature | 3000K - 6000K                   |
| Beam Angle        | 9°/15°/20°/30°                  |
| Finish            | Silver Grey/Black/White         |
| Control           | Switchable/TRIAC/DALI/1-10V/PWM |