


Cerco

Surface Mounted light




Features

- High brightness, adopting high quality
- SMD 2835 LED
- Energy saving up to 85%, high efficiency power supply, low power consumption
- Provides a white and homogenous ambient lighting that recreates natural daylight
- Thin&light design achieves high performance and low cost
- Diffuser: PMMA

 Surface

 UGR
<21

 IP Rating
IP42




 5 years
warranty Standard Warranty

TECHNICAL DATA SHEET - CERCO - 15185 - SURFACE MOUNTED MOON LIGHT



TECHNICAL DATA

Product Data	Surface Mounted light
Lamp Type	SAMSUNG LED
Driver	OSRAM Driver
Wattage	100W
Color Temperature	4000K
Rated Luminaire Luminous Flux	12,000lm
Rated Luminaire Efficiency	120lm/W
IP Rating	42
Beam Angle	120°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Output Current	2400mA
Safety Class	Class II
SDCM (MacAdam)	<3
Operating Temperature	-20°C ~ +40°C
Material	PMMA Diffuser + Aluminium
Finish	White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Residential, Commercial, Hospitality etc.

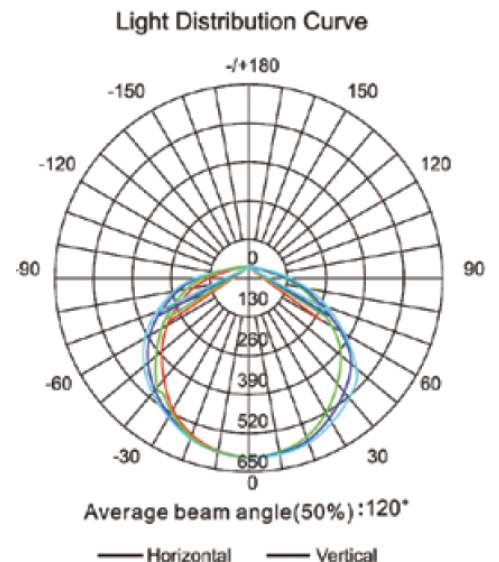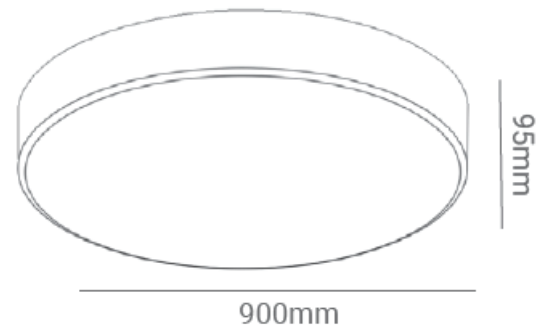

TECHNICAL OPTIONS

Wattage	15W, 20W, 25, 40W, 80W, 120W, 140W, 180W
Color Temperature	3000K-6000K
Finish	Black & Silver
Control	Switchable, TRIAC, 1-10V, Dali, 0-10V