

## Grado Step Light



### Features

- Housing: 12# Die-casting grey powder coated aluminum T=60-80um
- Glass: Tempered glass T=8mm
- Gasket: Tooling shaped seal
- Mounting Sleeve: ABS 076#



Recessed



IK Rating  
IK08



IP Rating  
IP65





Standard Warranty

## TECHNICAL DATA SHEET - GRADO - 15191 - STEP LIGHT



### TECHNICAL DATA

<b>Product Data</b>	Step light
<b>Lamp Type</b>	OSRAM LED
<b>Wattage</b>	3x2W
<b>Color Temperature</b>	3000K
<b>Rated Luminaire Luminous Flux</b>	540lm
<b>Rated Luminaire Efficiency</b>	90lm/W
<b>IP Rating</b>	65
<b>Beam Angle</b>	45° 35° Asymmetric
<b>Voltage</b>	AC220-240V
<b>Frequency Range</b>	50-60 Hz
<b>CRI</b>	Ra>80
<b>Power Factor</b>	>0.5
<b>Working Temperature</b>	-20°C~ +50°C
<b>SDCM (MacAdam)</b>	<4
<b>Safety Class</b>	Class I
<b>Output Current</b>	25mA
<b>Material</b>	Die Cast Aluminium Body
<b>Finish</b>	Grey
<b>Life Span</b>	50,000 Hours
<b>Warranty</b>	5 Years
<b>Applications</b>	Outdoors, Residential, Commercial, Hospitality etc.

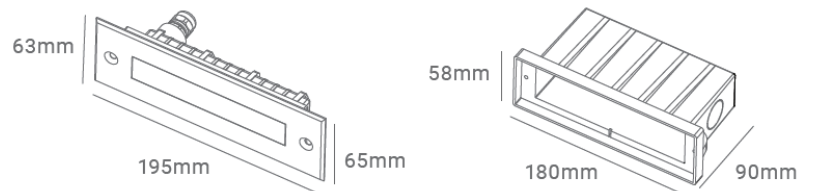

### TECHNICAL OPTIONS

<b>Color Temperature</b>	3000K-6000K
<b>Voltage</b>	DC24V
<b>Control</b>	Switchable, TRIAC, 1-10V, Dali, PWM

