

Invitar

Bollard light



Features

- Housing: Die Cast Aluminium with treatment of corrosion protection and UV Proof powder coating
- Gasket: Made of Thermostable silica gel to improve protection class
- Fastener: Made of stainless steel with high intensity and corrosion protection
- Diffuser: Clear Glass

Bollard



IP Rating
IP65



IK Rating
IK08






Standard Warranty

TECHNICAL DATA SHEET - INVITAR - 15238 - BOLLARD LIGHT



TECHNICAL DATA

Product Data	Bollard light
Lamp Type	BRIDGELUX LED
Wattage	20W
Color Temperature	3000K
Rated Luminaire Luminous Flux	2200lm
Rated Luminaire Efficiency	110lm/W
IP Rating	65
Beam Angle	120°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Output Current	600mA
SDCM (MacAdam)	<3
Safety Class	Class II
Material	Aluminium Body with Stainless Steel Expansion Bolts
Finish	Dark Grey
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Residential, Commercial, Hospitality etc.

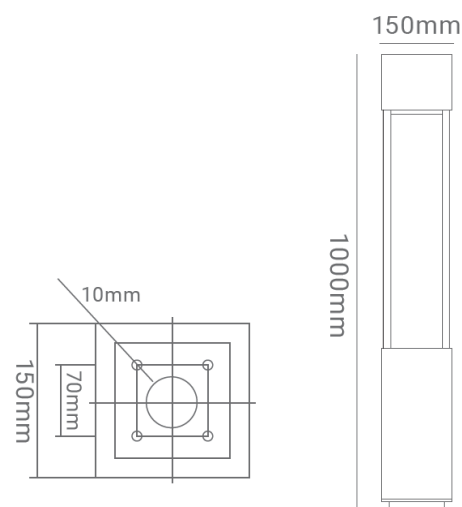

TECHNICAL OPTIONS

Color Temperature	3000K-6000K
Control	Switchable, TRIAC, 1-10V, Dali