


Pito T8 Tube




Features

- One ended & double ended bypass Type B
- Base: G13 available
- Environmentally friendly without mercury
- 100~120LPW high lumen efficiency
- No mercury glass so NO Regulated Universal Waste rules or fines

 Tube

 IP Rating
IP20

Colour Rendering Index
≥85



 Standard Warranty

TECHNICAL DATA SHEET - PITO - 15616 - T8 TUBE WITH MICROWAVE SENSOR



TECHNICAL DATA

Product Data	T8 Tube
Lamp Base	G13
Lamp Type	EPISTAR LED
Wattage	14W
Color Temperature	4000K
Rated Luminaire Luminous Flux	1400lm
Rated Luminaire Efficiency	100lm/W
IP Rating	20
Beam Angle	120°
Voltage	AC85-265V
CRI	Ra>85
Power Factor	>0.97
Frequency Range	50-60 Hz
Output Current	180mA
Operating Temperature	-20°C ~ +50°C
Safety Class	Class II
Sensor	Microwave Sensor
StandBy Time	2 min
StandBy Brightness	30%
Effective Induction Distance	8-10m
Material	Aluminum + PC
Finish	White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Hospitals, Commercial, Hospitality etc.

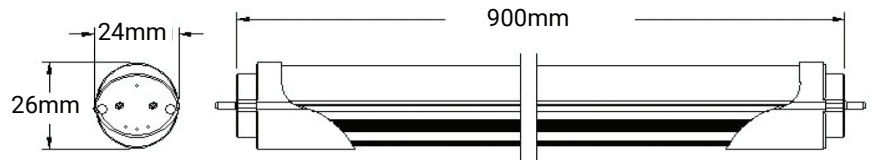

TECHNICAL OPTIONS

Wattage	9W, 20W, 25W
Color Temperature	2700K - 6500K
Switchable	Switchable, DALI, TRIAC, 0-10V