

Bular

Recessed Downlight



Features

- Selected LED chip with efficient driver, energy-saving with 50000 hours lifespan
- Frosted cover with high transmittance
- Excellent heat dissipation design
- Powder coated surface treatment, durable and not easy to fall off

 **Recessed**



IP Rating
IP44



UGR
<21

6 years
warranty



Standard Warranty

TECHNICAL DATA SHEET - BULAR - 15647 - RECESSED DOWNLIGHT



TECHNICAL DATA

Product Data	Recessed Downlight
Lamp Type	CITIZEN LED
Wattage	40W
Color Temperature	4000K
Rated Luminaire Luminous Flux	3800lm
Rated Luminaire Efficiency	95lm/W
IP Rating	44
Beam Angle	60°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.95
SDCM(Macadam step)	< 6
Output Current	945~1155mA
THD (%)	≤ 15%
Safety Class	Class II
Operating Temperature	-20°C ~ +40°C
Storage Temperature	25°C
Material	Aluminum with Powder coated surface
Finish	White + Iron Grey
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Commercial, Hospitality etc.

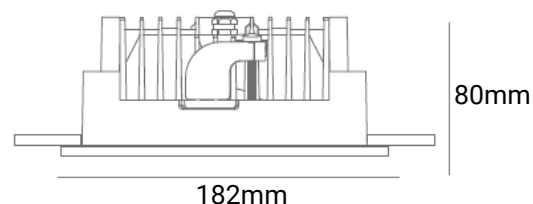

Cutout: 160x175mm

TECHNICAL OPTIONS

Wattage	20W / 30W
Color Temperature	3000K-6000K
Beam Angle	30°/45°/80°
Control	Switchable/TRIAC/0-10V/DALI/1-10V

