

## Lunio Flood light



### Features

- Up to 1250W and over 140,000 luminous flux
- Unique, fold fin heatsink technology greatly reduces thermal density and maintains a low LED junction temperature
- Protective UV stabilized powder coated finish
- 0-10V or DALI Dimming options and compatible with all leading lighting control systems



Surface



IP Rating  
IP65



IK Rating  
IK07







Standard Warranty

## TECHNICAL DATA SHEET - LUNIO - 15757 - FLOOD LIGHT



### TECHNICAL DATA

<b>Product Data</b>	Flood Light
<b>Lamp Type</b>	OSRAM LED
<b>Driver</b>	Meanwell Driver
<b>Wattage</b>	600W
<b>Color Temperature</b>	3000K
<b>Rated Luminaire Luminous Flux</b>	87,000lm
<b>Rated Luminaire Efficiency</b>	145lm/W
<b>IP Rating</b>	65
<b>Beam Angle</b>	8°x8°
<b>Voltage</b>	AC100-305V
<b>Frequency Range</b>	50-60 Hz
<b>CRI</b>	Ra>70 or 80
<b>Power Factor</b>	>0.9
<b>Output Current</b>	12400mA
<b>IK Rating</b>	07
<b>Electrical Class</b>	Class I
<b>Operating Temperature</b>	-40 °C to +45 °C
<b>Ambient Storage Temperature</b>	-25°C to +80°C
<b>Material</b>	Aluminium body + tempered glass
<b>Finish</b>	Black powder coated
<b>Life Span</b>	100,000 Hours
<b>Warranty</b>	6 Years
<b>Applications</b>	Outdoors, Commercial, Hospitality etc.

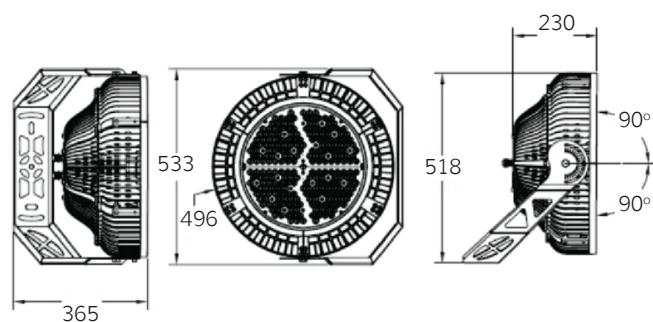

### TECHNICAL OPTIONS

<b>Wattage</b>	400W/800W/1000W/1250W/
<b>Color Temperature</b>	4000K, 5000K, 6500K
<b>Beam Angle</b>	20°x20°, 30°x30°, 45°x45°, 60°x60°, 75°x75°
<b>Control</b>	Switchable, 0-10V, DALI, Sensor

