

Lunio Flood light



Features

- Up to 1250W and over 140,000 luminous flux
- Unique, fold fin heatsink technology greatly reduces thermal density and maintains a low LED junction temperature
- Protective UV stabilized powder coated finish
- 0-10V or DALI Dimming options and compatible with all leading lighting control systems



Surface



IP Rating
IP65



IK Rating
IK07






Standard Warranty

TECHNICAL DATA SHEET - LUNIO - 16018 - FLOOD LIGHT



TECHNICAL DATA

Product Data	Flood Light
Lamp Type	OSRAM LED
Driver	Meanwell Driver
Wattage	800W
Color Temperature	3000K
Rated Luminaire Luminous Flux	120,000lm
Rated Luminaire Efficiency	150lm/W
IP Rating	65
Beam Angle	10°x10°
Voltage	AC100-305V
Frequency Range	50-60 Hz
CRI	Ra>70 or 80
Power Factor	>0.9
Output Current	16800mA
IK Rating	07
Electrical Class	Class I
Operating Temperature	-40 °C to +45 °C
Ambient Storage Temperature	-25°C to +80°C
Material	Aluminium body + tempered glass
Finish	Black powder coated
Life Span	100,000 Hours
Warranty	6 Years
Applications	Outdoors, Commercial, Hospitality etc.

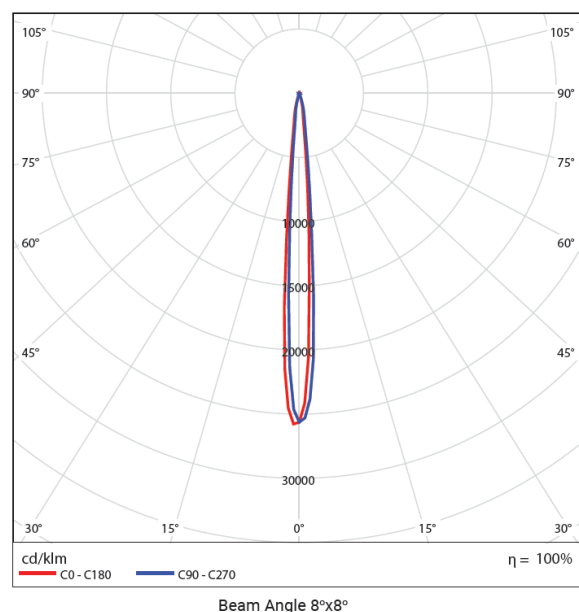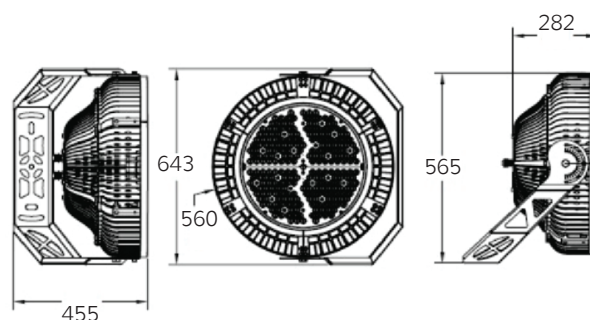

TECHNICAL OPTIONS

Wattage	400W/600W/1000W/1250W/
Color Temperature	4000K, 5000K, 6500K
Beam Angle	20°x20°, 30°x30°, 45°x45°, 60°x60°, 75°x75°
Control	Switchable, 0-10V, DALI, Sensor