

Dentro X Wall Light



Features

- Die-cast aluminium body, corrosion resistant
- Designed for high performance LED
- Developed to enlighten floors with a wide and well-directed light avoiding any glare effect
- Ideal light source for good ambiance or orientatable lighting



Recessed



IK Rating
IK06



IP Rating
IP65





Standard Warranty

TECHNICAL DATA SHEET - DENTRO X - 17084 - RECESSED WALL LIGHT



TECHNICAL DATA

Product Data	Wall light
Lamp Type	CREE LED
Wattage	3W
Color Temperature	3000K
Rated Luminaire Luminous Flux	285lm
Rated Luminaire Efficiency	95lm/W
IP Rating	65
Beam Angle	79°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.5
Output Current	350mA
SDCM (MacAdam)	< 5
Working Temperature	-20°C~50°C
Safety Class	Class I
Material	Aluminum / glass
Finish	Dark Grey
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Residential, Commercial, Hospitality etc.

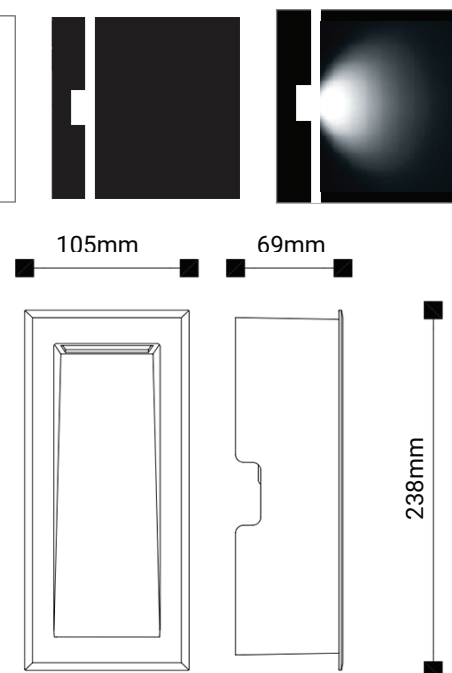

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

TECHNICAL OPTIONS

Wattage	6W / 7W
Color Temperature	3000K-6000K
Finish	Black / Silver / White / Rust
Control	Switchable, TRIAC, 1-10V, Dali

