

LED DOWNLIGHT INSTRUCTION

Feature:

OL range of downlights is latest generation of Pure aluminum housing downlights.
 Stylish designs and pure aluminum heat sink.
 Optic PC diffuser.
 Isolated constant current led driver
 Perfect performance and compatibility.
 High lumens output.
 We provide a limited 5 year warranty for a maximum of ten hours usage per day for domestic and commercial use only. Product modification is not valid for warranty

Production Specification

IP Rating: IP44
 Voltage: 200-240VAC 50HZ
 Wattage: See details on package
 Ambient Temperature: -20°C ~ +45°C
 Storage Conditions: -20°C ~ +60°C

Model	Dimension	Cutout
10W	∅113*62mm	∅90-100mm
15W	∅143*65mm	∅117-130mm
20W	∅200*70mm	∅168-185mm
30W	∅230*75mm	∅192-215mm
40W	∅280*95mm	∅240-265mm


How to install:

•Subject to Figure 1 & Table 1 for installation place and conditions

Tab.1


A-gap above the top of fitting	25mm
B-side gap to structural membrane	25mm
C-the gap to thermal insulation	25mm

Fig.1

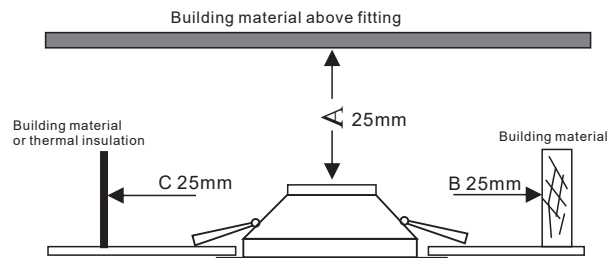

RISK OF FIRE—Required clearance from structural members and building elements
 SCB=25mm HCB=25mm

Before installing, set the switch to select the CCT

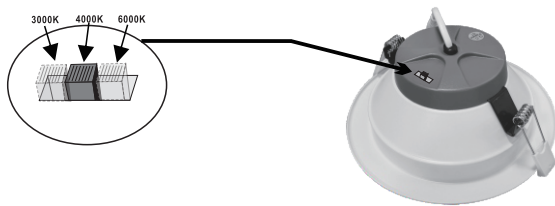

Pure Aluminum LED Downlight



Warning:

This product is subject to standard warranty, and modification of this product or improper installation will void the warranty!