

Sonido Suspended Light



Features


- The sound absorbing panel is made of 100% polyester fiber material
- It has sound absorption, flame retardant, non—toxic, non—irritating and misunderstanding.
- It is a new material that integrates sound absorption, heat insulation and decorative effects.
- Light Distribution: Double Sided Lighting



UGR
<18



IP Rating
IP20



Light
Distribution

7
years
warranty

Standard Warranty

Configuration





Pendant

TECHNICAL DATA SHEET - SONIDO - 17122 - SUSPENDED LIGHT



TECHNICAL DATA

Product Data	Suspended light
Lamp Type	OSRAM LED
Driver	OSRAM Driver
Wattage	UP/DOWN 60W
Color Temperature	4000K
Rated Luminaire Luminous Flux	6,120lm UP / 6,000lm DOWN
Rated Luminaire Efficiency	102lm/W
IP Rating	20
Beam Angle	140° UP / 70° DOWN
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.97
Power Efficiency	88%
Output Voltage	DC 27-54V
Output Current	1200mA
Safety Class	Class I
Operating Temperature	-20°C ~ +40°C
Material	Aluminium + Fabric
Finish	Grey Acoustic
Life Span	70,000 Hours
Warranty	7 Years
Applications	Residential, Office, Conference room, Study, Library

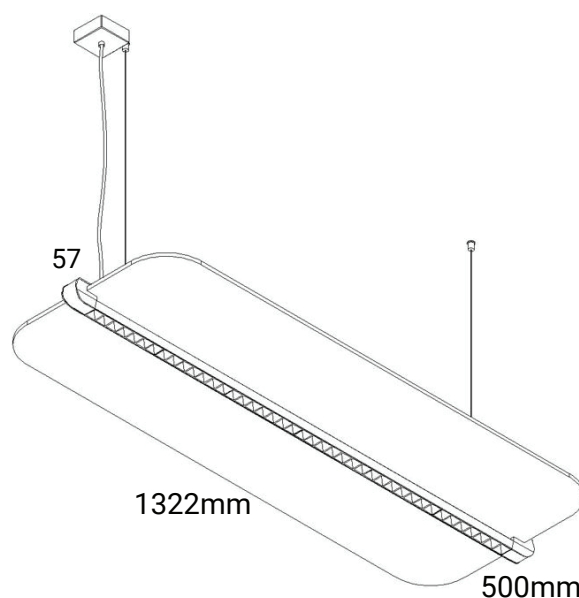

TECHNICAL OPTIONS

Color Temperature	3000K / 4000K / 6000K
Finish	Yellow, Red, Blue, Green, Orange
Control	Switchable/TRIAC/0-10V/DALI/1-10V

TECHNICAL DATA SHEET - SONIDO - 17122 - SUSPENDED LIGHT

PHOTOMETRIC RESULTS

Indirect

Central Intensity: 371.973cd



Maximum Intensity: 522.751cd

Beam Angle(10%): Left:-80.2 Right:80.1

Angle of maximum intensity: C:0.0 G:49.0

Half Peak Side Angle(50%): Left:-66.6 Right:66.5

Light Out Rate(LOR): 100.00%

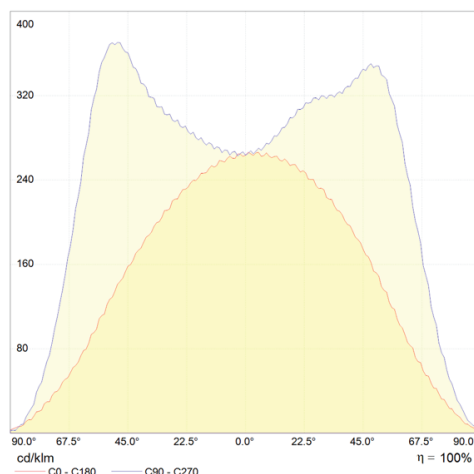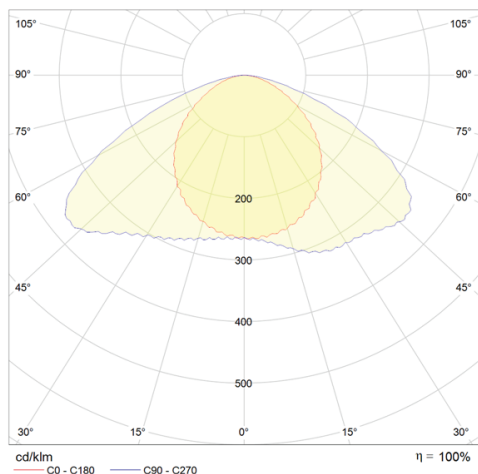

Direct

Central Intensity: 1815.103cd

Maximum Intensity: 1821.146cd

Beam Angle(10%): Left:-54.0 Right:55.9

Angle of maximum intensity: C:45.0 G:6.0

Half Peak Side Angle(50%): Left:-33.7 Right:36.6

Light Out Rate(LOR): 100.00%

