

Delmor

Recessed Downlight (Changeable CCT)



Features

- Up to 70% energy saving compared to standard CFL
- Environment friendly, without Mercury or any other hazardous substances
- CCT: 3000K 4000K 6000K
- 86mm cutout
- 90°wide beam angle
- No UV/IR light


 **Recessed**

 **IP Rating**
IP44

 **UGR**
<19



6 years
warranty **Standard Warranty**

TECHNICAL DATA SHEET - DELMOR - 17201 - RECESSED DOWNLIGHT



TECHNICAL DATA

Product Data	Recessed Downlight
Lamp Type	CITIZEN LED
Wattage	13W
Color Temperature	3000K, 4000K, 6000K
Rated Luminaire Luminous Flux	975lm
Rated Luminaire Efficiency	75lm/W
IP Rating	44
Beam Angle	90°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.95
SDCM(Macadam step)	< 3
Output Current	350mA
Output Voltage	DC29-33V
Safety Class	Class II
Operating Temperature	-20°C ~ +45°C
Efficiency	≥86%
Material	Aluminium Body
Finish	White
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Commercial, Hospitality etc.

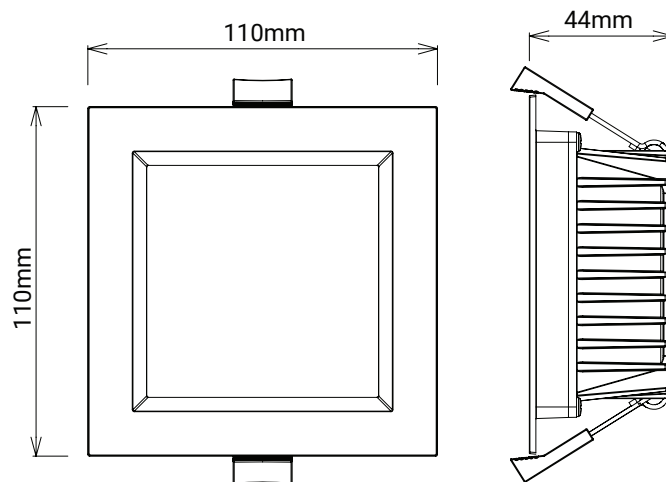





Cutout: Ø86mm

TECHNICAL OPTIONS

Wattage	18W / 25W
Control	Switchable/TRIAC/0-10V/DALI/1-10V


TECHNICAL DATA SHEET - DELMOR - 17201 - RECESSED DOWNLIGHT

PHOTOMETRIC DIAGRAM

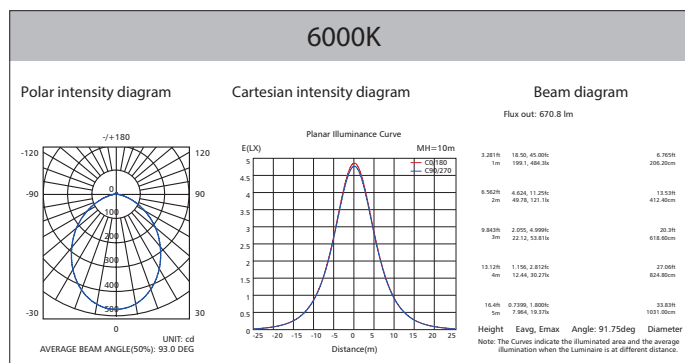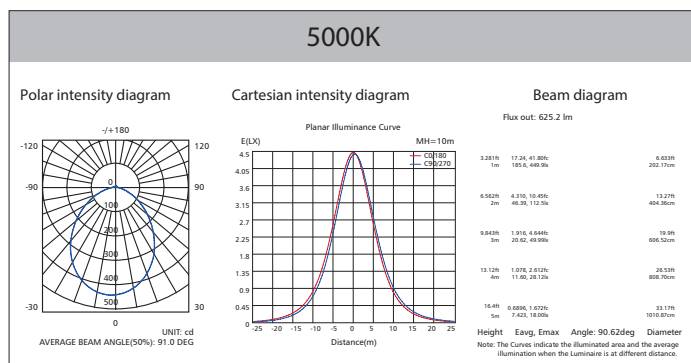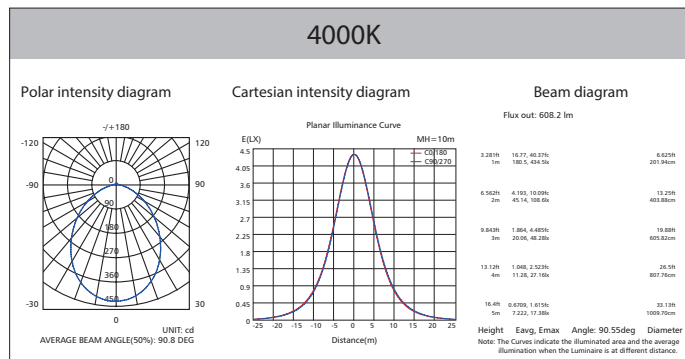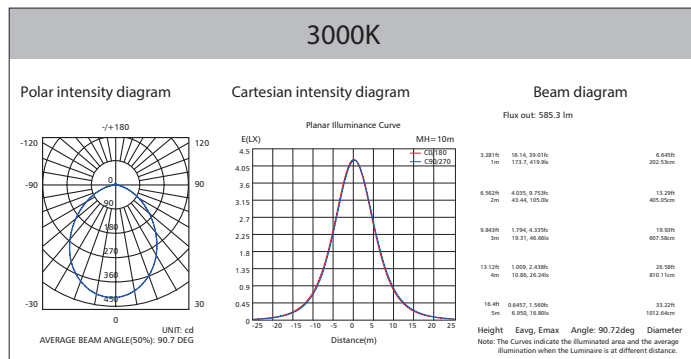

www.upshine.com info@upshine.com

POLAR DIAGRAM COMPARISON

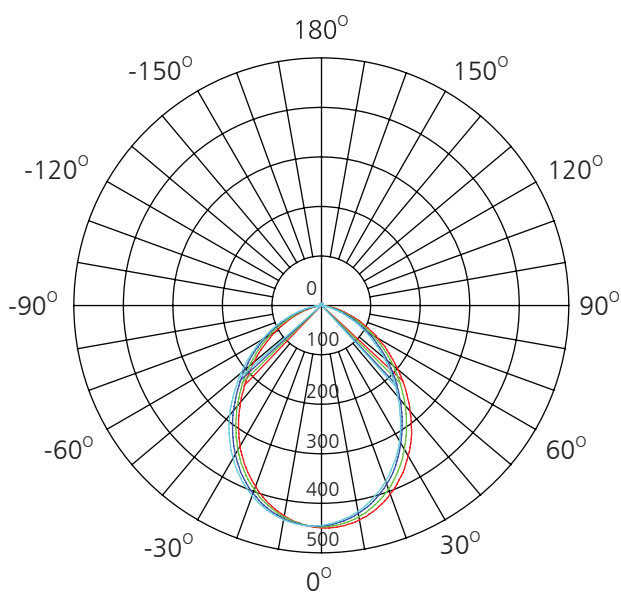

AVERAGE BEAM ANGLE (50%): 91.0 DEG

UNIT: cd

- C0/180, 91.0 deg
- C30/210, 91.0 deg
- C60/240, 91.8 deg
- C90/270, 91.1 deg