

Inso

Linear Pendant Light (Up & down)




Features

- Exquisite round up and down unlinkable design.
- PC diffuser and prismatic diffuser is optional.
- High-efficiency, glare free
- Finish in matt black/ matt white and grey.



UGR
<22



Light
Distribution



IP Rating
IP20



6 years
warranty

Standard Warranty

Configuration






Pendant

TECHNICAL DATA SHEET - INSO - 17296 - LINEAR PENDANT LIGHT



TECHNICAL DATA

Product Data	Suspended light
Lamp Type	SAMSUNG LED
Driver	LIFUD Driver
Wattage	40W
Color Temperature	4000K
Rated Luminaire Luminous Flux	3800lm
Rated Luminaire Efficiency	95lm/W
IP Rating	20
Beam Angle	97.4°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>83
Power Factor	>0.95
Output Current	178mA
Safety Class	Class I
Operating Temperature	-20°C ~ +40°C
Material	Aluminium housing + PC diffuser
Finish	White
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Office, Conference room, Study, Library

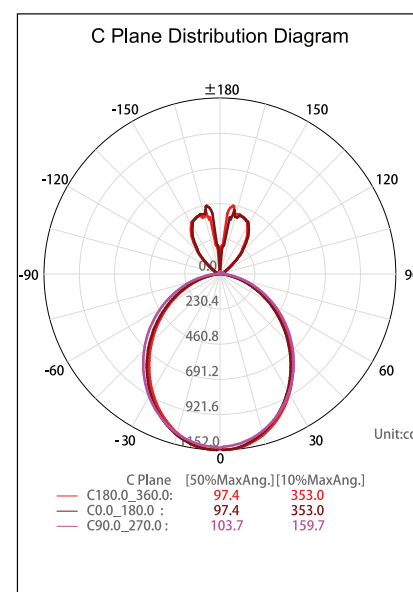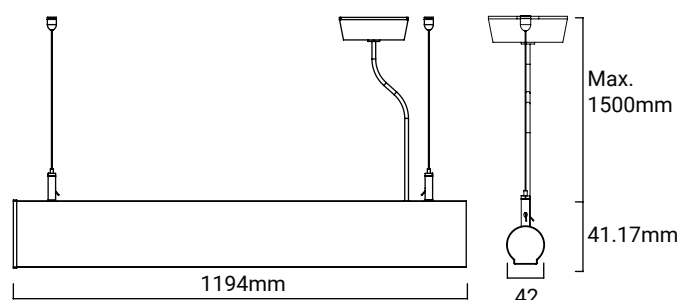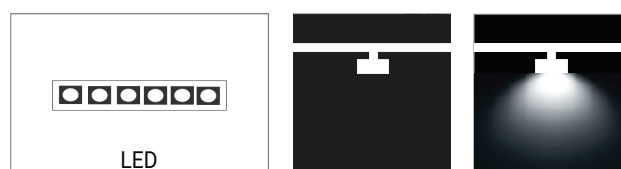

TECHNICAL OPTIONS

Wattage	25W / 30W
Color Temperature	3000K - 6000K
Finish	Matt Black / Grey
Control	Switchable/TRIAC/0-10V/DALI/1-10V