Liceo
Street light

Features

- Ultra-thin design, beautiful and elegant
- Low heat,electric energy conversion rate in more than 90%
- Integrated die-cast alum in um with external heat dissipation ribs for excellent heat dissipation and increased lifex`

Installation
Street

IK Rating
IK07

IP Rating
IP65

Standard Warranty
5 years warranty

SYV Iluminacion Europea, Sociedad Limitada
Avda San Pablo 28 - 28820,
Cosloda (Madrid) Spain

© 2021 SYV

Liceo

TECHNICAL DATA SHEET - LICEO - 15937 - STREET LIGHT

TECHNICAL DATA

Product Data	Street Light
Lamp Type	EPISTAR LED
Wattage	150W
Color Temperature	4000K
Rated Luminaire Luminous Flux	15,750lm
Rated Luminaire Efficiency	105lm/W
IP Rating	65
Beam Angle	140º
Voltage	AC100-240V
Frequency Range	50-60 Hz
CRI	Ra>70
Power Factor	>0.95
Power Distribution	3.5KV
Output Current	2900mA
Operating temperature	-20 °C ~ +50 °C
Safety Class	Class I
IK Rating	07
Material	Aluminium Body
Finish	Black
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Commercial, Hospitality etc.





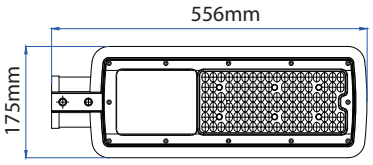



TECHNICAL OPTIONS

Wattage	30W/50W/100W
Color Temperature	3000K-6500K
Beam Angle	70º
Control	Switchable, TRIAC, 1-10V, DALI, 0-10V

SYV Iluminacion Europea, Sociedad Limitada
Avda San Pablo 28 - Naves 15 y 2 - 28820
Cosloda (Madrid) Spain
SYV Design is constantly developing and improving it's products. The right is reserved to change specification without prior notification or public announcement.