

Paloma

Recessed Downlight



Features

- Selected LED chip with efficient driver, energy-saving with 60000 hours lifespan
- Excellent heat dissipation design
- Light Source: BRIDGELUX LED

 **Recessed**

 **UGR**
<19

 **IP Rating**
IP44



6 years
warranty **Standard Warranty**

TECHNICAL DATA SHEET - PALOMA - 17984 - RECESSED MINI DOWNLIGHT



TECHNICAL DATA

Product Data	Recessed Downlight
Lamp Type	BRIDGELUX LED
Wattage	18W
Color Temperature	3000K+6000K
Rated Luminaire Luminous Flux	1350lm
Rated Luminaire Efficiency	75lm/W
IP Rating	44
Beam Angle	36°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>90
Power Factor	>0.95
Safety Class	Class II
Output Current	300mA
Output Voltage	54V
Operating Temperature	-20°C ~ +40°C
Material	Die Cast Aluminum
Finish	White
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Commercial, Hospitality etc.

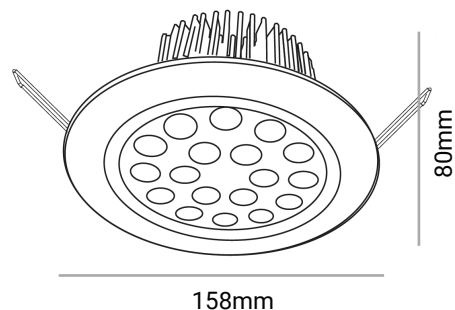

Cutout: 135mm

TECHNICAL OPTIONS

Wattage	10W
Color Temperature	3000K-6000K
Control	Switchable/TRIAC/0-10V/DALI