

## Ramona

### Drop Pendant Light



### Features

- Best Lumen output efficacy
- Use of high-tech spraying technology, anti-corrosion
- Die cast aluminium body and heat sink designed for effective heat dissipation
- High Light Uniformity
- High value appearance and durability
- 2.5kV Protection
- 90% Energy Saving



**Installation**  
Pendant



**UGR**  
<13



**IP Rating**  
IP44





**Standard Warranty**

## TECHNICAL DATA SHEET - RAMONA - 19180 - DROP PENDANT LIGHT



### TECHNICAL DATA

<b>Product Data</b>	Pendant Light
<b>Lamp Type</b>	BRIDGELUX LED
<b>Wattage</b>	5W
<b>Color Temperature</b>	3000K
<b>Rated Luminaire Luminous Flux</b>	350lm
<b>Rated Luminaire Efficiency</b>	70lm/W
<b>IP Rating</b>	44
<b>Beam Angle</b>	15° ~ 50° (Adjustable)
<b>Input Voltage</b>	AC220-240V
<b>Output Voltage</b>	3V
<b>Frequency Range</b>	50-60 Hz
<b>CRI</b>	Ra>90
<b>Power Factor</b>	>0.5
<b>Output Current</b>	600mA
<b>Safety Class</b>	Class II
<b>Operating temperature</b>	-20°C ~ +40°C
<b>SDCM</b>	<3
<b>Material</b>	Die cast Aluminium+Lens
<b>Finish</b>	White
<b>Life Span</b>	60,000 Hours
<b>Warranty</b>	6 Years
<b>Applications</b>	Residential, Hospitality, Commercial, etc.

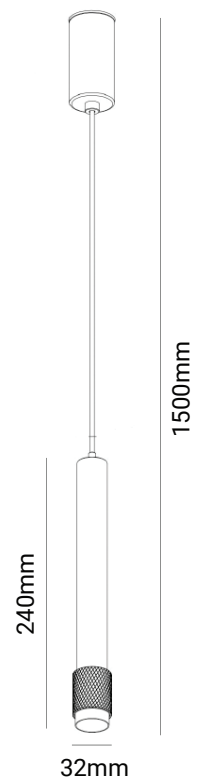

### TECHNICAL OPTIONS

<b>CCT</b>	4000K, 6000K
<b>Finish</b>	Black
<b>Control</b>	Switchable, TRIAC, 1-10V, DALI, 0-10V