

## Cira Max Strip Light



### Features

- Dots-free with uniform lighting
- Cuttable and solderless connection with crystal connector
- Heat resistant unique design: Special heat resistant
- PCB layout, copper layer from 2oz to 4oz that make sure lower voltage drop and excellent heat dissipation
- No smell, no yellowish, no breakage, non-sticky, no chemical reaction, dust-free



5M Roll

Colour Rendering Index  
≥90



IP Rating  
IP20

5  
years  
warranty


Standard Warranty

## TECHNICAL DATA SHEET - CIRA MAX - 19455 - STRIP LIGHT



### TECHNICAL DATA

<b>Product Data</b>	Strip Light
<b>Lamp Type</b>	Epistar LED
<b>LED Qty</b>	480 LED/Mtr
<b>Wattage</b>	9W/mtr
<b>Color Temperature</b>	4000K
<b>Rated Luminaire Luminous Flux</b>	945lm
<b>Rated Luminaire Efficiency</b>	105lm/W
<b>IP Rating</b>	20
<b>Beam Angle</b>	180°
<b>Voltage</b>	DC24V
<b>Safety Class</b>	Class II
<b>Frequency Range</b>	50-60 Hz
<b>CRI</b>	Ra>90
<b>Power Factor</b>	>0.9
<b>SDCM</b>	<3
<b>Operating Temperature</b>	-20°C ~ +40°C
<b>Material</b>	3M self-adhesive tape on the back
<b>Finish</b>	White
<b>Life Span</b>	50,000 Hours
<b>Warranty</b>	5 Years
<b>Applications</b>	Residential, Commercial, Hospitality etc.




### TECHNICAL OPTIONS

<b>Wattage</b>	5W / 10W / 15W
<b>Color Temperature</b>	2700K-6000K
<b>Voltage</b>	DC12V
<b>Control</b>	Switchable/TRIAC/1-10V/DALI/0-10V, DMX


## TECHNICAL DATA SHEET - CIRA MAX - 19455 - STRIP LIGHT

### DIMENSION DRAWING

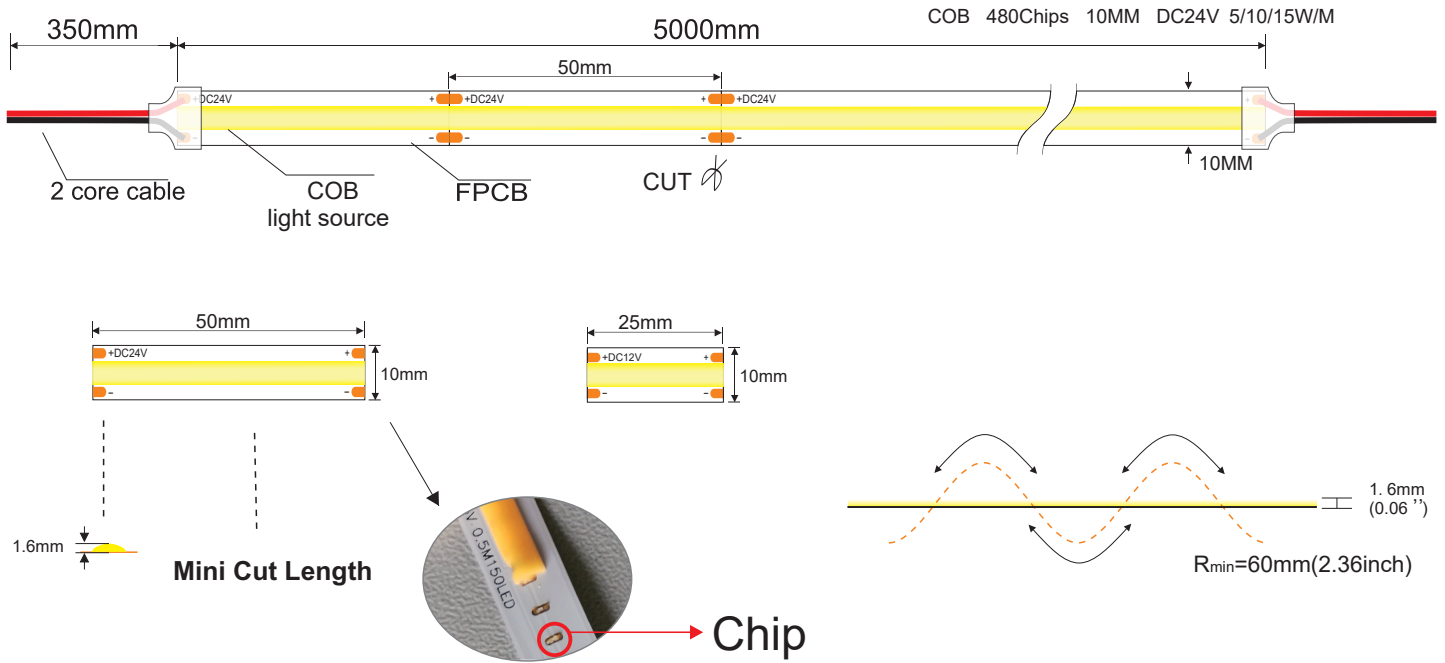

### PRODUCT PARAMETERS

Spectroscopic standard

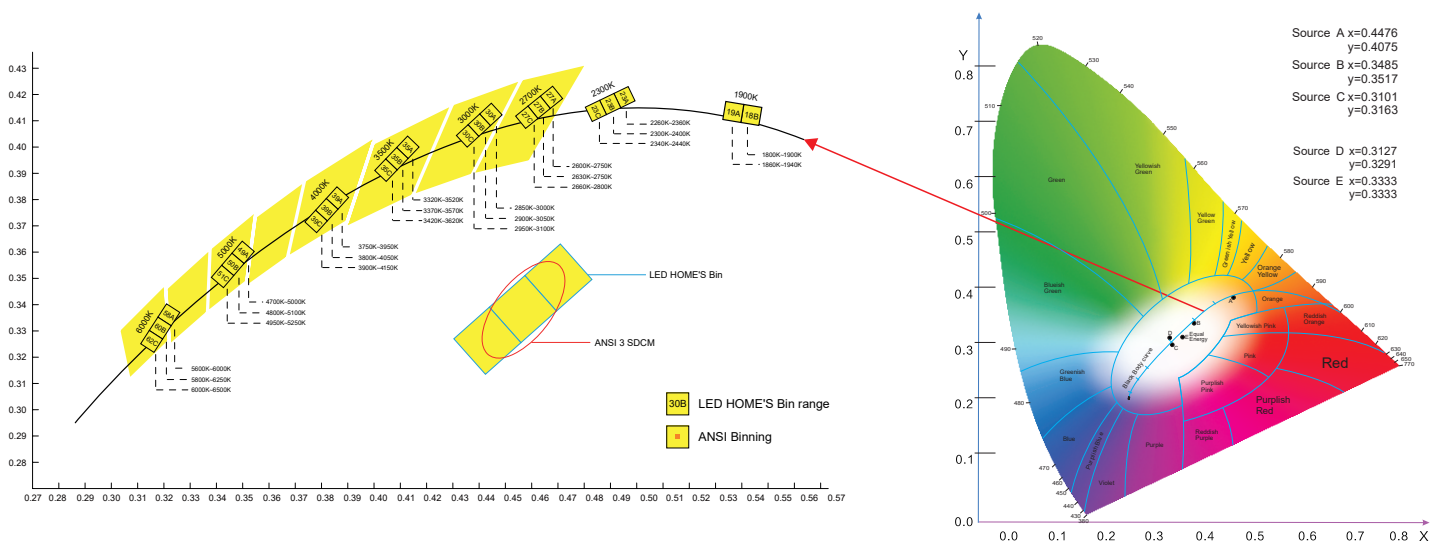

## TECHNICAL DATA SHEET - CIRA MAX - 19455 - STRIP LIGHT

### LIGHT DISTRIBUTION CURVE

