

Ramona

Drop Pendant Light



Features

- Best Lumen output efficacy
- Use of high-tech spraying technology, anti-corrosion
- Die cast aluminium body and heat sink designed for effective heat dissipation
- High Light Uniformity
- High value appearance and durability
- 2.5kV Protection
- 90% Energy Saving



Installation
Pendant



UGR
<13



IP Rating
IP44





Standard Warranty

TECHNICAL DATA SHEET - RAMONA - 19181 - DROP PENDANT LIGHT



TECHNICAL DATA

Product Data	Pendant Light
Lamp Type	BRIDGELUX LED
Wattage	5W
Color Temperature	3000K
Rated Luminaire Luminous Flux	350lm
Rated Luminaire Efficiency	70lm/W
IP Rating	44
Beam Angle	15° ~ 50° (Adjustable)
Input Voltage	AC220-240V
Output Voltage	3V
Frequency Range	50-60 Hz
CRI	Ra>90
Power Factor	>0.5
Output Current	600mA
Safety Class	Class II
Operating temperature	-20°C ~ +40°C
SDCM	<3
Material	Die cast Aluminium+Lens
Finish	Black
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Hospitality, Commercial, etc.

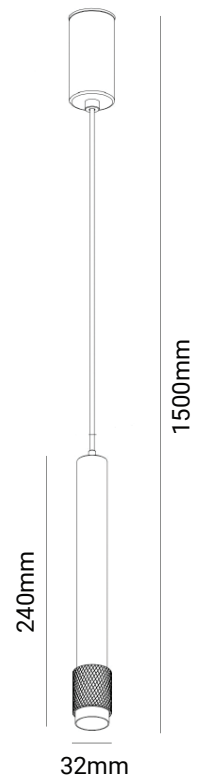

TECHNICAL OPTIONS

CCT	4000K, 6000K
Finish	White
Control	Switchable, TRIAC, 1-10V, DALI, 0-10V