

Oria

Neon Flex Strip Light



Features

- Silicon neon flex Top/Sideview IP67, DC24V has bending direction vertically and Front / Side / Bottom Cable Entry.
- Across section size: 16*15mm It is IP67 protection, never turn yellow, UV resistant, saltwater resistant and high temperature resistant via opal silicone coating.



18M Roll

Colour Rendering Index
≥90



IP Rating
IP67

5
years
warranty


Standard Warranty

TECHNICAL DATA SHEET - ORIA - 19967 - NEON FLEX STRIP LIGHT



TECHNICAL DATA

| | |
|--------------------------------------|---|
| Product Data | Strip Light |
| Lamp Type | Lumileds |
| LED Qty | 120 LEDs/M |
| Wattage | 9W/mtr |
| Color Temperature | 3000K |
| Rated Luminaire Luminous Flux | 540lm/M |
| Rated Luminaire Efficiency | 60lm/W |
| IP Rating | 67 |
| Beam Angle | 120° |
| Voltage | DC24V |
| Safety Class | Class II |
| Frequency Range | 50-60 Hz |
| CRI | Ra>90 |
| Power Factor | >0.9 |
| Operating Temperature | -25°C ~ +50°C |
| Material | Silicone Body |
| Life Span | 50,000 Hours |
| Warranty | 5 Years |
| Applications | Outdoors, Residential, Commercial, Hospitality etc. |

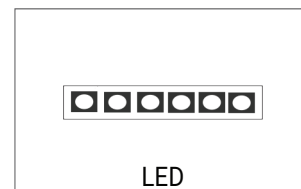


TECHNICAL OPTIONS

| | |
|--------------------------|------------------------|
| Wattage | 5W, 15W |
| Color Temperature | 4000K, 6000K, RGBW |
| Control | TRIAC/1-10V/DALI/0-10V |


TECHNICAL DATA SHEET - ORIA - 19967 - NEON FLEX STRIP LIGHT

DIMENSIONS



Top view

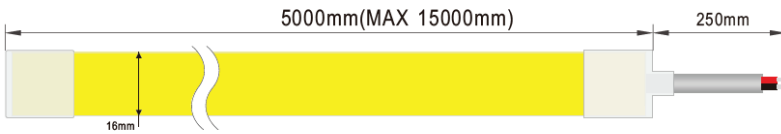


Side view

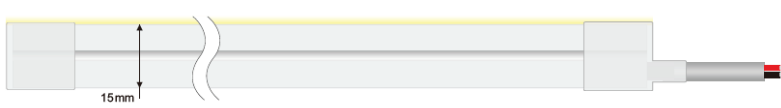


Bottom view

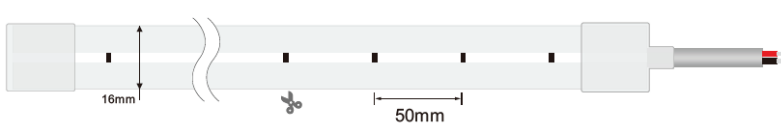


Diameter



Min bending diameter



transverse bending



Vertical bending

LIGHT DISTRIBUTION CURVE

