

Kiko

Recessed Step Light



Features

- The Kiko produces the perfect light output for an entry way, a guiding light through a corridor.
- Housing: Die-cast aluminium body, corrosion resistant
- Designed for high performance LED
- Developed to enlighten floors with a wide and well-directed light avoiding any glare effect



Recessed



IK Rating
IK10



IP Rating
IP65





Standard Warranty

TECHNICAL DATA SHEET - KIKO - 20247 - RECESSED STEP LIGHT



TECHNICAL DATA

Product Data	Step light
Lamp Type	Bridgelux LED
Wattage	3W
Color Temperature	3000K
Rated Luminaire Luminous Flux	240lm
Rated Luminaire Efficiency	80lm/W
IP Rating	65
Beam Angle	20°
Voltage	AC85-265V
Frequency Range	50-60 Hz
CRI	Ra>90
Power Factor	>0.5
Safety Class	Class II
Output Current	260mA
Working Temperature	-20°C~ +50°C
Material	Die-cast aluminum
Finish	Grey
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Residential, Commercial, Hospitality etc.

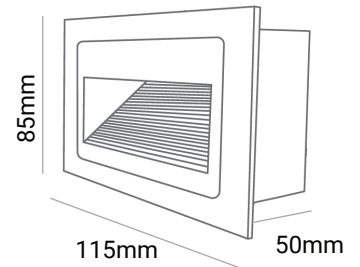

Cutout: 105x75mm

TECHNICAL OPTIONS

Color Temperature	4000K-6000K
Finish	White, Black
Control	Switchable, TRIAC, 1-10V, Dali, PWM