

Indoor Collection

Lighting designed to enhance the way
you live, work, dine, and unwind.



SYV ILUMINACIÓN EUROPEA S.L

SYV
SPAIN


design to match function

Our products are designed in line with our innovative technology. State of the art architecture requires luminaires that enhance the space from both a technical and design perspective.

Our products are manufactured in Hongkong and are checked repeatedly, from the receipt of raw materials through to the processing, assembly and prototype stages. Our goal is to supply you with the very best lighting equipment offering the latest in technological developments.

Our range of indoor luminaires embraces a wide spectrum of different lighting tools: spotlights and downlights, track and light structures, ceiling lights, recessed lights and linear lights. They all share a common guiding design principle of efficient visual comfort.

Our understanding of light extends across residential, offices, hospitality, education, retail and public spaces. We are a trusted supplier to our renowned customers like EMAAR, ETISALAT, ADIB, Sharjah Municipality and many more. We begin with planning aspect of a project to supply and installation. Our team works with many different stakeholders to exceed design and performance expectations. We work in collaboration with you to be a trusted lighting partner.

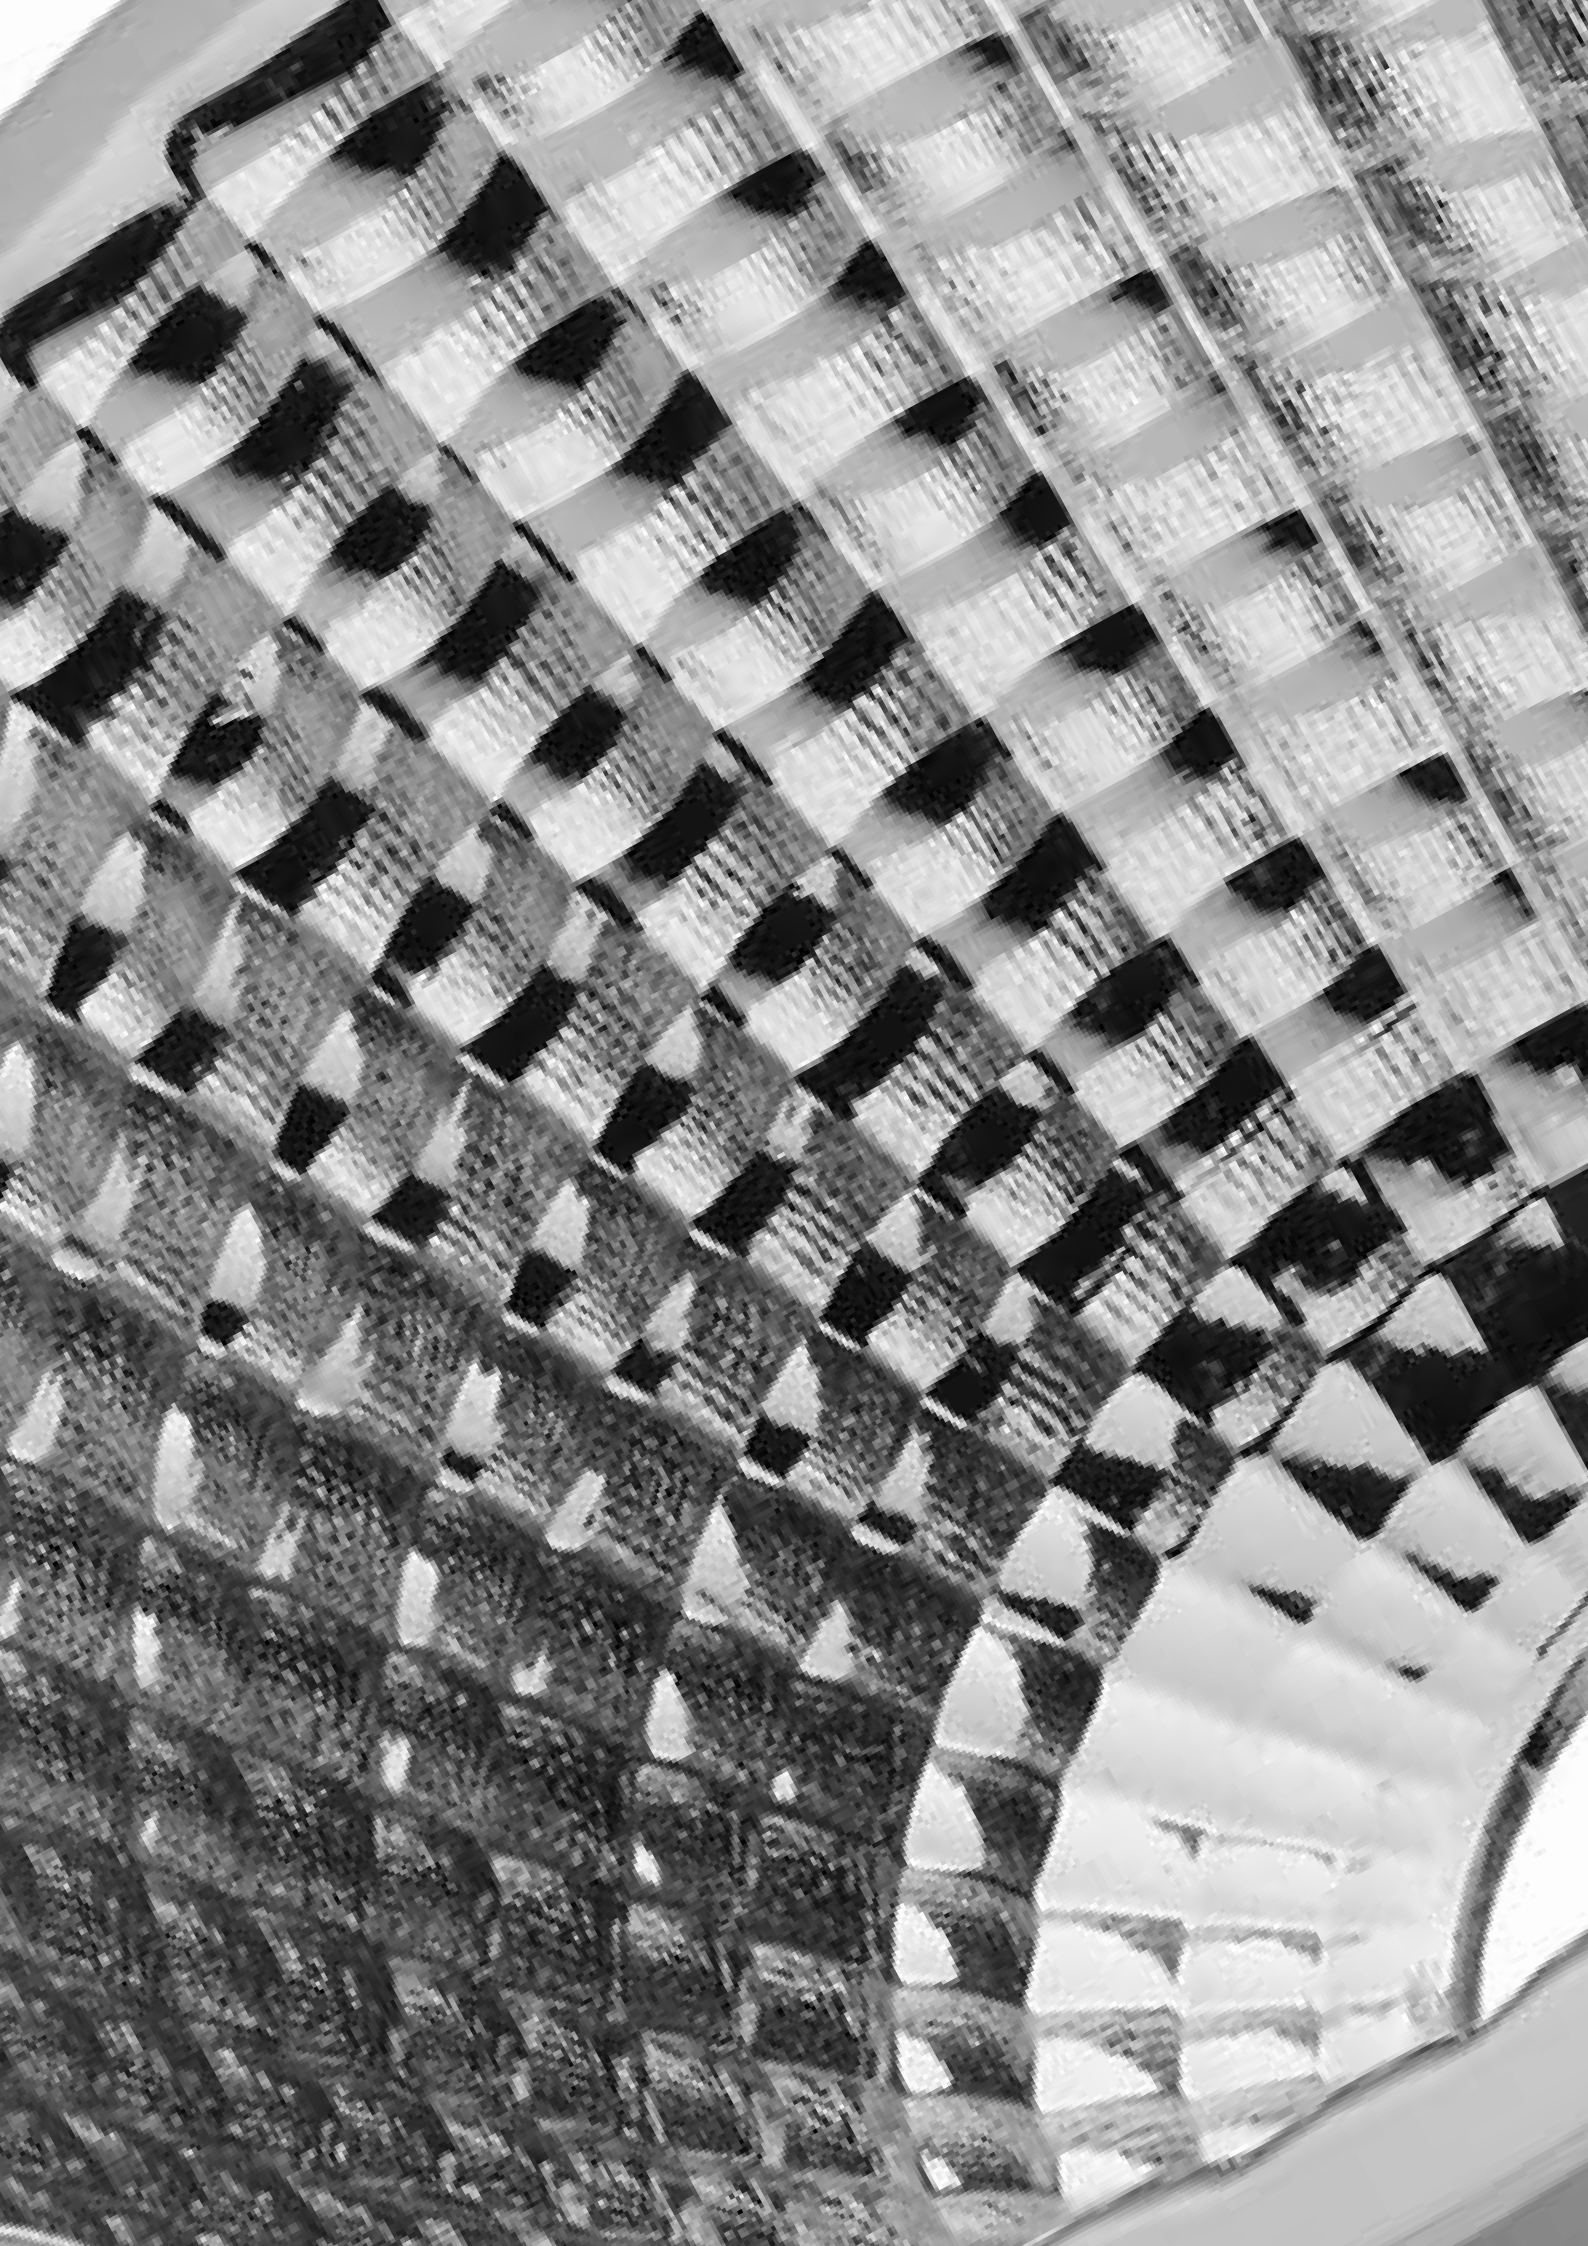An aerial, black and white photograph of a modern building's facade. The facade is composed of a dense grid of rectangular panels, some of which are recessed, creating a complex pattern of light and shadow. The perspective is from a high angle, looking down at the building's surface.

design & development

Reliable engineering, material quality and technologically advanced optical solutions, together with constant research to devise refined, shapes and lines, are the assets that SYV draws upon to create and offer cuttingedge products combining technology and aesthetic appeal.

lighting design

SYV offers to its customers a lighting design service through its skilled engineers and the lighting design software DIALUX and AGI32. By supplying CAD plans of the areas for which lighting design is requested, our department will be pleased to recommend the most suitable luminaires and installations. Upgrades of the photometric archives can be downloaded free of charge from our website or supplied upon request.

Sustainable & Energy Efficient Lighting



Save AED on your lighting

LED lighting can reduce your lighting energy output by up to 86%. Combined with the lights and professional installation, this equals substantial savings.



It's a low-cost carbon cutting upgrade for your business

It is most effective and viable solution to reduce your carbon footprint in particular in existing buildings.



Use LED lighting to cut your carbon footprint & reduce your light costs

Use LED lighting to cut your carbon footprint.



Save time & money replacing blown globes

LED lights can last up to 10 Years so your business don't have to waste your time & effort replacing blown halogen globes.

Specifications

Ingress Protection (IP)

The IP rating refers to the degree of protection provided by electrical equipment enclosures against the ingress of solid objects and liquids in accordance with EN 60529.

IP X Y

X	Protection against the ingress of solid objects	X	Protection against the ingress of liquids
0	No protection	0	No protection
1	≥ 50 mm diameter	1	Vertically falling drops of water
2	≥ 12.5 mm diameter	2	Direct sprays of water up to 15° from vertical
3	≥ 2.5 mm diameter	3	Direct sprays of water up to 60° from vertical (rain)
4	≥ 1.0 mm diameter	4	Water splashed from all directions
5	Protected against dust (no harmful deposit)	5	Low-pressure water jets from all directions
6	Totally protected against dust	6	High-pressure water jets or heavy seas
		7	Temporary immersion
		8	Prolonged immersion at a depth specified by the manufacturer
		9K	High-pressure steam/water jet cleaning

SYV luminaires are rated :

- IP65 for floodlights
- IP66, 68 and 69K for tubular luminaire

The following tests have been conducted under laboratory conditions in accordance with ISO 20653. Materials and design choices are optimised to maintain this level of ingress protection throughout the life of the luminaire.

The following tests have been conducted under laboratory conditions in accordance with ISO 20653. Materials and design choices are optimised to maintain this level of ingress protection throughout the life of the luminaire.

Rating	Test Procedure
IP65	Spraying the enclosure from all practicable directions with a stream of water from a standard-compliant test nozzle • Test duration : 3 minutes • Flow rate : 12.5 l/min • Distance between the nozzle and enclosure surface : 2.5 m - 3 m • Pressure : 30 kPa
IP66	Spraying the enclosure from all practicable directions with a stream of water from a standard-compliant test nozzle • Test duration : 3 minutes • Flow rate : 100 l/min • Distance between the nozzle and enclosure surface : 2.5 m - 3 m
IP68	Immersion of the luminaire in cold water • Immersion of the luminaire at a depth of 4 m (0.4 Bar) • The luminaire is switched on for 1 hour before commencement of the test • The luminaire is switched off during the test • Immersion duration : 1 hour
IP69K	Spraying the enclosure with a high-pressure jet of hot water to reproduce food industry cleaning conditions. • Test duration : 2,5 minutes • Flow rate : 15 l/min • Distance between the nozzle and enclosure surface : 100 and 150 mm • Pressure : 10000 kPa • Water temperature : 80 °C

Impact resistance (IK)

Luminaires from the SYV indoor lighting range are rated IK07 (floodlights) and IK10 (all other products). The following tests have been conducted under laboratory conditions in accordance with EN 62 262. Materials and design choices are optimised to maintain this level of impact resistance throughout the life of the luminaire.

The ingress protection levels of our luminaires remain intact following mechanical impact, as long as this remains below the impact energy guaranteed by the IK rating.

XX	Protection against the ingress of solid objects
00	No protection
01	Impacts of 0.14 joules impact energy (the energy of a 14 g weight falling 1 m)≥ 12.5 mm diameter
02	Impacts of 0.2 joules impact energy (the energy of a 20 g weight falling 1 m)
03	Impacts of 0.35 joules impact energy (the energy of a 35 g weight falling 1 m)
04	Impacts of 0.5 joules impact energy (the energy of a 50 g weight falling 1 m)
05	Impacts of 0.7 joules impact energy (the energy of a 70 g weight falling 1 m)
06	Impacts of 1 joules impact energy (the energy of a 100 g weight falling 1 m)
07	Impacts of 2 joules impact energy (the energy of a 200 g weight falling 1 m)
08	Impacts of 5 joules impact energy (the energy of a 500 g weight falling 1 m)
09	Impacts of 10 joules impact energy (the energy of a 1 kg weight falling 1 m)
10	Impacts of 20 joules impact energy (the energy of a 2 kg weight falling 1 m)

Electrical safety classification

The electrical safety classification defines a level of electrical protection for the user as the basis for measuring the potential risk of a person coming into contact with mains voltage (230 V AC) or any other voltage hazardous to humans (above 50 V in dry surroundings).

SYV luminaires comply with electrical safety classes I, II and III in accordance with EN 60598-1.

Class	Protection	Symbol
Class I	Equipment that is electrically insulated and provided with a connection to earth to protect exposed metal parts that could become live accidentally	
Class II	Equipment that has double or reinforced insulation of its active components (functional and physical insulation) with no earthing of metal parts	
Class III	Operation at very low voltage (< 50 V)	

Fire resistance

The glow wire test is governed by the IEC 60695-2-10 standard, and is applied to determine whether the luminaire installed in a building could potentially burn and, more importantly, could contribute to the spread of fire. The diffusers fitted to luminaires from the Sammode indoor range pass the glow wire test at a temperature of 650 °C. The borosilicate protective glass and metal luminaire components are deemed non-flammable.


The test consists of applying a wire heated to a fixed temperature (650 °C, 850 °C, 960 °C, etc.) for a fixed period (5 or 30 seconds, for example) and examining the behaviour of the luminaire housing, especially if it catches fire.

Safety and Testing Measures

A well-developed inspection process is implemented for both raw materials and finished lights. This involves not just the use of advanced testing instruments but also adherence to established protocols and the expertise of technicians with years of experience in this field.



Utilizing state-of-the-art CNC and die casting processing machines and technologies, we create lighting fixtures with exquisite craftsmanship, offering flexibility in customized services.

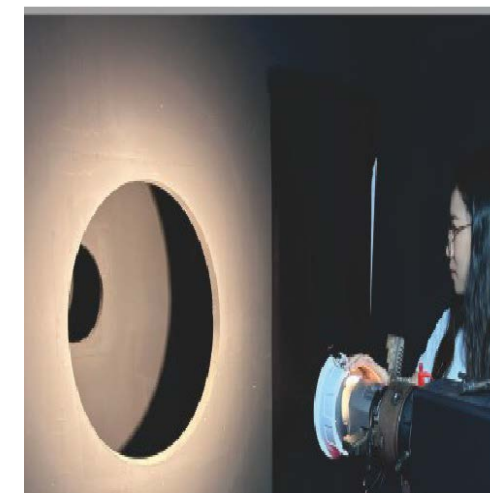

We possess patents and proprietary tooling modules for all our manufactured products, guaranteeing sustained and stable long-term after-sales service for our customers.



Within the company's testing and inspection apparatus, we have systems for testing photometric, colorimetric, and electrical parameters. Additionally, we conduct waterproof tests such as IPX5, IPX6, IPX7, and IPXB. Other equipment includes a goniophotometer, a constant temperature or humidity incubator, a corrosion testing machine, a cryogenic storage



A comprehensive system for ensuring product quality, coupled with the capability for autonomous research and development of new lights.



Recessed
Downlights

INDOOR



Zozo | 022



Buena | 023



Paloma | 026



Delgado R | 029



Delgado S | 029



Caer | 034



Bular | 035



Aina | 036



Chico | 040



Silva | 042



Estela | 043

Recessed
Spotlights



Liva | 048



Kenzo R | 051



Kenzo T | 052



Estrocho | 054



Santino | 055



Moreno | 060



Menos | 063



Cortar | 064



Micro | 067



Lava X | 069



Varo | 072



Desta Pro | 078



Dita | 080



Casa | 082



Lizo | 085



Rejilla | 086

Recessed
Spotlights



Lugar X | 087



Ira | 089



Genssen | 093



Cubo | 097



Matias | 100



Nuco | 101



Kreon | 102



Savino | 103



Gutlof | 107



Dimo | 109



Nimo | 109



Riste | 111

Tracklights



Estirar | 116



Estirar S | 118



Medida | 121



Medida S | 121



Capaz | 125



Sitio | 127



Latour | 131



Vino-48V | 136



Vino-24V | 137



Vino(0-10V) | 140



Acento-48V | 142



Acento-24V | 143



Acento(0-10V) | 146



Orza | 147



Encanto-48V | 150

Magnetic
Tracklights





Magnetic
Tracklights

			
Encanto-24V 151	Encanto(0-10V) 154	Nano-48V 156	Nano-24V 157
			
Dorado-48V 160	Castel-48V 162	Justina-24V 172	Alicia -24V 172
			
Lorena-24V 174	Polo-24V 175	Bello-24V 176	Elio-24V 177
			
Olga-24V 177	Betita-24V 178		

Panel lights

			
Luke Pro 182	Rio 184	Plaza 185	Largo 188
			
Erlich 191	Viga 192		

Pendant
lights

			
Flauta 200	Sonido 202-204	Dido 208	Pignataro 212
			
Eva 213	Inso 214	Eleni 217	Pedro 218
			
Cima 220	Liyamada 224	Lira 227	Giotto 228
			
Latour 231	Gordon 232	Pixo 234	Ramona 235

Linear
Extrusion

			
Zoe 35 246	Zoe 75 246	Zoe 95 246	Flex 252


Ceiling lights



Ellie | 257



Mira | 259



Mellizo | 264



Cara | 267



Amara | 268



Kyra | 270



Montura | 271



Savona | 274



Trento | 275



Alana | 278



Ostra | 279



Cerco | 280



Vasco | 283



Noche | 284

Step
lights



Pisar | 285



Pisar | 285

Batten
Fittings



Lenora | 289



Fargo | 292



Ferrol | 293



Stark | 295

Highbay &
Industrial
lights



Olin | 300



Esla | 301



Coral | 303



Trejo | 304



Jeron | 307



Javi | 311



Arrlo | 312

Spotlight
frames



Cayo | 315



Cinta | 315



Alva | 318



Poquito | 319



Delfi | 323

Mirror &
Bathroom



Clon Max | 327



Erin | 330



Mato | 331



Calvo | 335



Espejo | 336

Strip
lights

			
Pilla 340	Lita 341	Faja 344	Blass 345
			
Faktor 348	Cielo 349	Cabo 352	Cira 353
			
Veta 356	Rayas 358	Campos 360	Oria 361
			
Vicar 362	Fresno 365	Quero 368	RGB 369
			
Cuerda 371			



DOWN
LIGHTS



ZOZO
IP65

SYV | Recessed Downlights

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminum
Finish: White Trim, Shining Silver Reflector
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality




Product Options:

Wattage: 10W/12W/15W/20W/25W/40W
Beam Angle: 24°
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Zozo	18529	30W	4000K	2,550lm	850mA	55°	Ø160x111	Ø150
	18528	35W	4000K	2,975lm	850mA	55°	Ø160x111	Ø150
	18224	35W	6000K	3,150lm	850mA	55°	Ø160x111	Ø150

AC220-240V IP 65  CRI>90 PF>0.9  SDCM <3  Class II  UGR<17 

30W / 35W

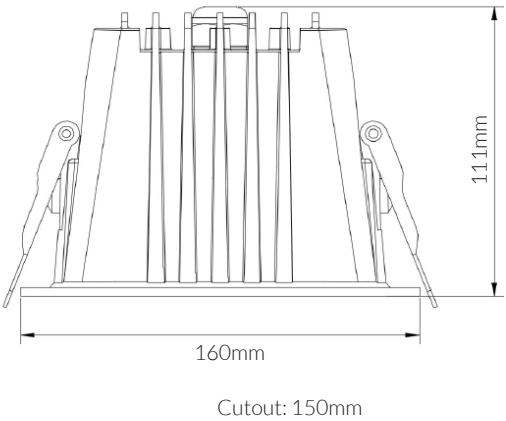

Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 13W / 18W / 25W / 35W / 45W / 50W
Beam Angle: 85° / 90°
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Buena	17204	10W	3000K/4000K/ 6000K	900lm/1000lm/ 1100lm	250mA	70°	Ø95x55	Ø75
	17205	18W	3000K/4000K/ 6000K	1620lm/1800lm/ 1980lm	1000mA	75°	Ø172x90	Ø145

AC220-240V

IP 54

 70°/75°

CRI>90



PF>0.9

 SDCM <3

 Class II

 UGR<19



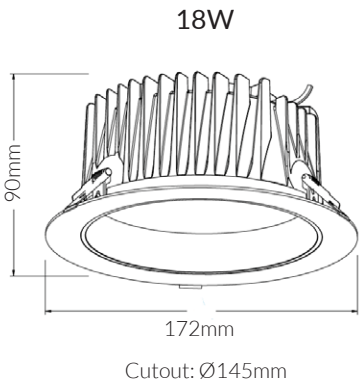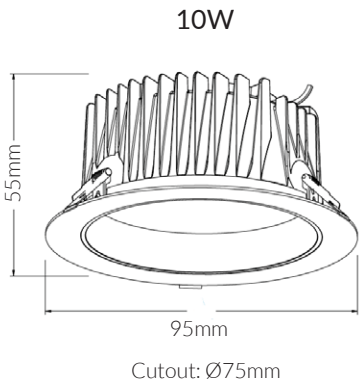

BUENA



UGR<19 ANTI-GLARE
CCT CHANGEABLE



PALOMA

SYV | Recessed Downlights

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Jewelry Store



Product Options:

Wattage: 18W
CCT: 3000K - 6000K
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Paloma	17985	10W	3000K+6000K	900lm	200mA	36°	Ø158x80	Ø135
	17984	18W	3000K+6000K	1,350lm	300mA	36°	Ø158x80	Ø135

AC220-240V

IP 44

 36°

CRI>90



PF>0.9

 SDCM <3

 Class II

 UGR<19



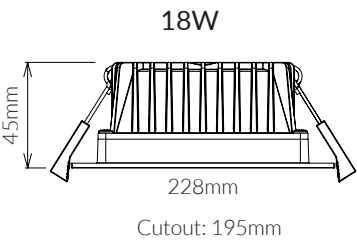



Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White+Iron Grey
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality






Product Options:

Wattage: 7W / 15W
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Delgado	14783	11W	3000K	880lm	250mA	90°	Ø104x36.3	Ø90
	15241	11W	4000K	900lm	250mA	90°	Ø104x36.3	Ø90
	14731	11W	6000K	935lm	250mA	90°	Ø104x36.3	Ø90
	14784	20W	3000K	1600lm	500mA	90°	Ø180x41.3	Ø160
	15213	20W	4000K	1650lm	500mA	90°	Ø180x41.3	Ø160
	14733	20W	6000K	1700lm	500mA	90°	Ø180x41.3	Ø160
	14608	30W	3000K	2400lm	700mA	90°	Ø220x46	Ø190
	15242	30W	4000K	2475lm	700mA	90°	Ø220x46	Ø190
	14785	30W	6000K	2550lm	700mA	90°	Ø220x46	Ø190

AC220-240V IP 44 90° CRI>90 PF>0.9

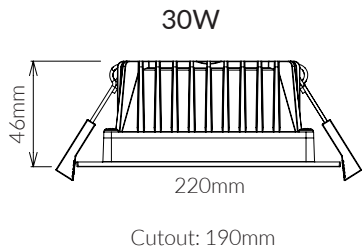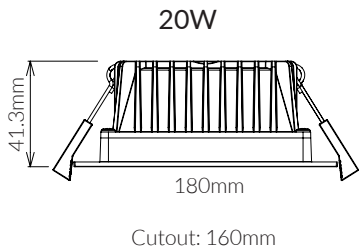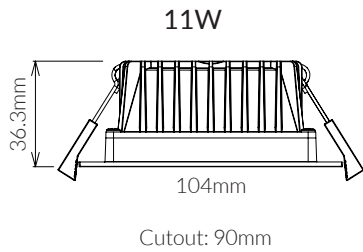

Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White+Iron Grey
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality






Product Options:

Wattage: 7W / 15W
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Delgado	14996	9W	3000K	720lm	250mA	90°	Ø104x36.3	Ø90x90
	15243	9W	4000K	945lm	250mA	90°	Ø104x36.3	Ø90x90
	14997	20W	3000K	1200lm	500mA	90°	Ø140x36.3	Ø125x125
	15244	20W	4000K	1700lm	500mA	90°	Ø140x36.3	Ø125x125
	15064	30W	3000K	2000lm	700mA	90°	Ø230x62	Ø200x200

AC220-240V IP 44 90° CRI>90 PF>0.9

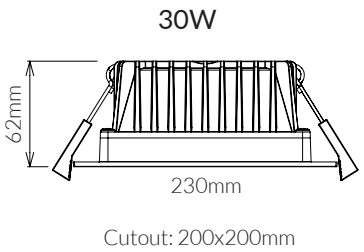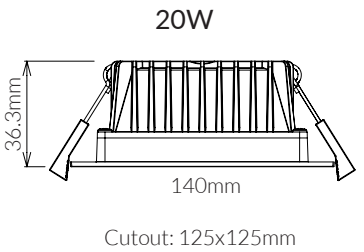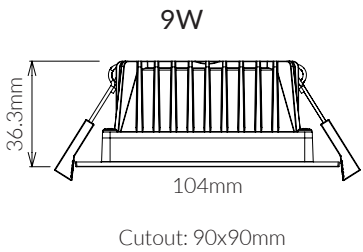





CAER/IP65

SYV | Recessed Downlights

Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminum
Finish: White+Iron Grey
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 20W / 40W
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Caer	15585	9W	3000K	810lm	200mA	90°	Ø103x58	Ø90
	16134	9W	4000K	855lm	200mA	90°	Ø103x58	Ø90
	16136	15W	3000K	1350lm	350mA	90°	Ø144x71	Ø130
	14611	30W	3000K	2700lm	700mA	90°	Ø226x96	Ø200
	15586	30W	6000K	3000lm	700mA	90°	Ø226x96	Ø200

AC220-240V

IP 65

 90°

CRI>90




PF>0.9

 SDCM <3

 Class II

 UGR<24



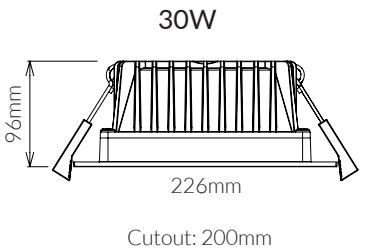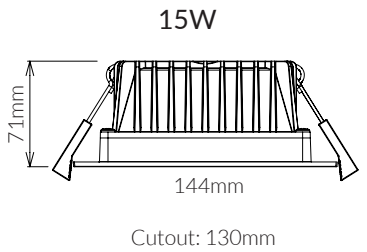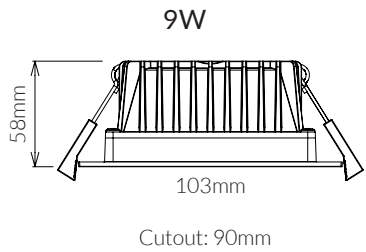

Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 9W / 20W / 30W / 50W
CCT: 3000K - 6000K
Beam Angle: 30°/45°/80°
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Bular	15647	40W	4000K	3800lm	945mA	60°	Ø182x80	Ø160-175

AC220-240V

IP 44

60°

CRI>90


PF>0.9

SDCM <3

Class II

UGR<21



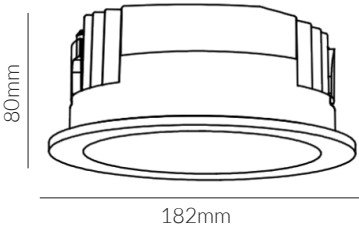

Cutout: Ø160-175mm

Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +40°C
Material: Pure Aluminium Heat Sink+Shiny Reflector
Finish: White
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 22W / 28W / 38W / 60W / 70W
CCT: 3000K - 6000K
Beam Angle: 25° / 45° / 50°
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Aina	16570	50W	5700K	6000lm	1200mA	55°	Ø230x192	Ø210

60°

CRI>90


PF>0.9

SDCM <3

Class III

UGR<19



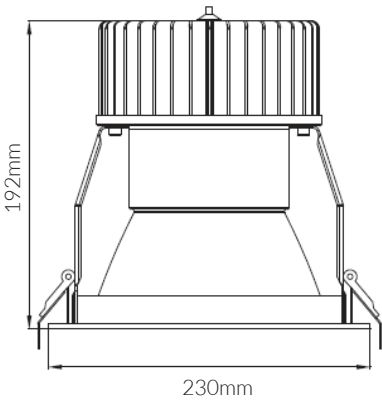

Cutout: Ø210mm





Product Specifications:

Lamp Type: SAMSUNG LED
SDCM: 6 MacAdam
Operating Temp.: -20°C ~ +40°C
Material: Aluminium Housing
Finish: White
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality






Product Options:

Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Chico	17073	10W	3000K/4000K/6000K	900lm/1000lm/1100lm	250mA	90°	Ø113x62	Ø95
	17074	20W	3000K/4000K/6000K	1800lm/2000lm/2200lm	500mA	90°	Ø200x75	Ø158
	17075	30W	3000K/4000K/6000K	2700lm/3000lm/3300lm	800mA	90°	Ø230x85	Ø182

AC220-240V IP 44 90° CRI>90 PF>0.9

SDCM <3 Class II UGR<22 CE

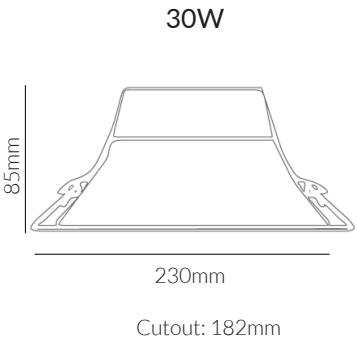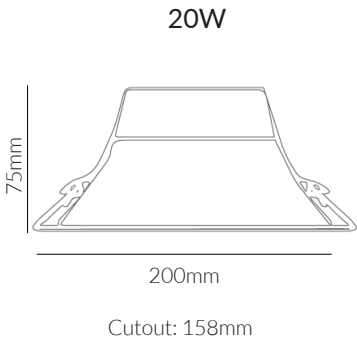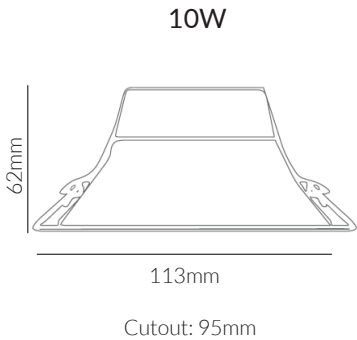



SILVA
CCT CHANGEABLE

SYV | Recessed Downlights

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Aluminium Housing
Diffuser: PMMA
Finish: White+Mirror Silver
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 30W / 40W / 50W
CCT: 3000K - 6000K
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Silva	19188	10W	3000K/4000K/6000K	85~95lm/W	250mA	60°	115x115x60	Ø100x100
	19189	20W	3000K/4000K/6000K	85~95lm/W	280mA	60°	140x140x75	Ø125x125
	19190	36W	3000K/4000K/6000K	85~95lm/W	250mA	60°	195x195x95	Ø180x180

AC220-240V

IP 44

60°

CRI>90




PF>0.9

SDCM <3

Class II

UGR<19





Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminum
Finish: White+Mirror Silver
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 10W / 15W / 25W / 35W / 40W / 50W
Beam Angle: 15°/24°/36°
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Estela	19186	10W	3000K/4000K/6000K	85~95lm/W	250mA	55°	Ø85x54	Ø75
	19187	30W	3000K/4000K/6000K	85~95lm/W	250mA	55°	Ø150x80	Ø135

AC220-240V

IP65

55°

CRI>90



PF>0.9

SDCM <3

Class II

UGR<19



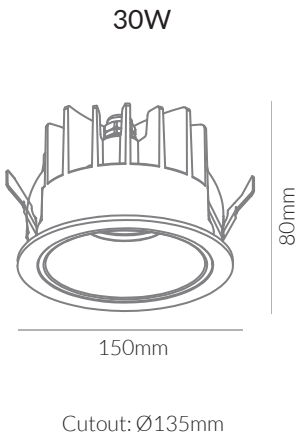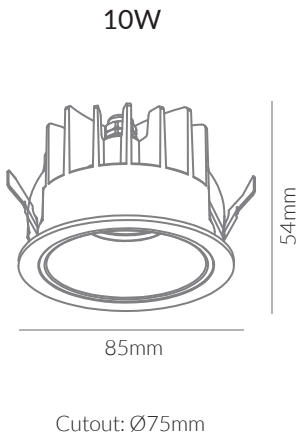

ESTELA
IP65



SPOTLIGHTS



LIVA

SYV | Recessed Spotlights

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +40°C
Material: 6063 Aluminum & PC reflector
Finish: White Ring, Black Reflector
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality






Product Options:

Wattage: 4W / 30W
CCT: 3000K - 6000K
Beam Angle: 15°/30°
Control: Switchable / DALI / 1-10V / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Liva (TRIAC Dimmable)	17964	2W	3000K	140lm	-	45°	Ø45x49	Ø37x37
	17965	10W	3000K	700lm	-	45°	147x45x49	Ø170x37
	17966	20W	3000K	1,400lm	-	45°	280x45x49	Ø273x37

AC220-240V IP 44 45° CRI>90 PF>0.5

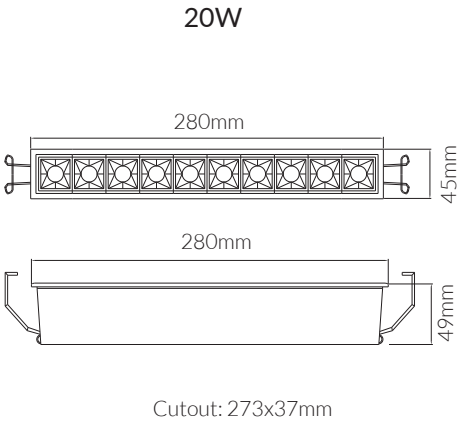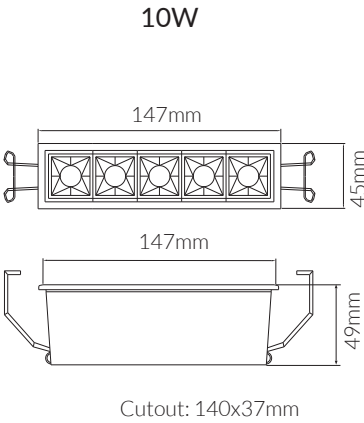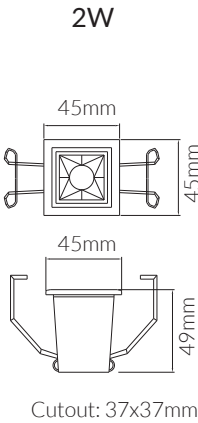



KENZO

RECESSED



KENZO

TRIMLESS

Product Specifications:

Lamp Type: BRIDGELUX LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 7W/12W/18W
CCT: 3000K - 6000K
Beam Angle: 10°/15°/38°
Control: Switchable / DALI / 1-10V / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Kenzo Recessed	18012	11W	3000K	770lm	250mA	50°	Ø84x104	Ø75
	18390	10W	3000K	770lm	250mA	24°	84.5x84.5x116	Ø75x75
	18013	2x10W	3000K	1,540lm	250mA	24°	193.8x104.3x116	Ø177x88
	18393	2x10W	3000K	1,540lm	250mA	24°	180x90.53x116	Ø164x77

AC220-240V

IP 44

50°/24°

CRI>90


PF>0.9

SDCM <3

Class II

UGR<19



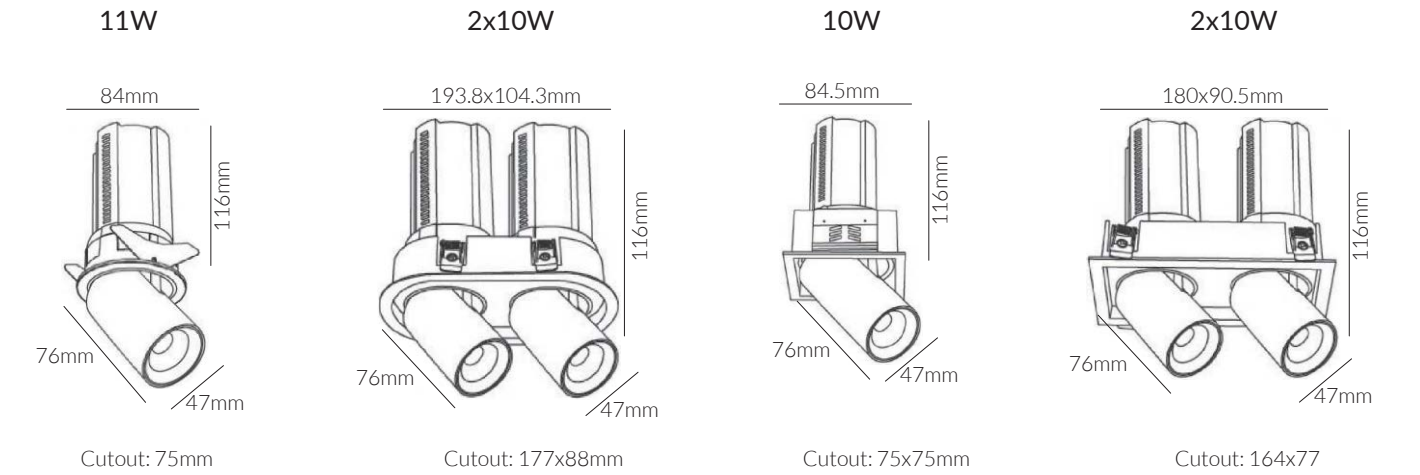

Product Specifications:

Lamp Type: BRIDGELUX LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 7W/12W/18W
CCT: 3000K - 6000K
Beam Angle: 10°/15°/38°
Control: Switchable / DALI / 1-10V / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Kenzo Trimless	18389	10W	3000K	770lm	250mA	24°	Ø73x104	Ø72
	18391	10W	3000K	770lm	250mA	24°	74x74x116	Ø73x73
	18392	2x10W	3000K	1,540lm	250mA	24°	177x87.5x116	Ø177x87
	18394	2x10W	3000K	1,540lm	250mA	24°	163x73.5x116	Ø162x73

AC220-240V

IP 44

50°/24°

CRI>90


PF>0.9

SDCM <3

Class II

UGR<19



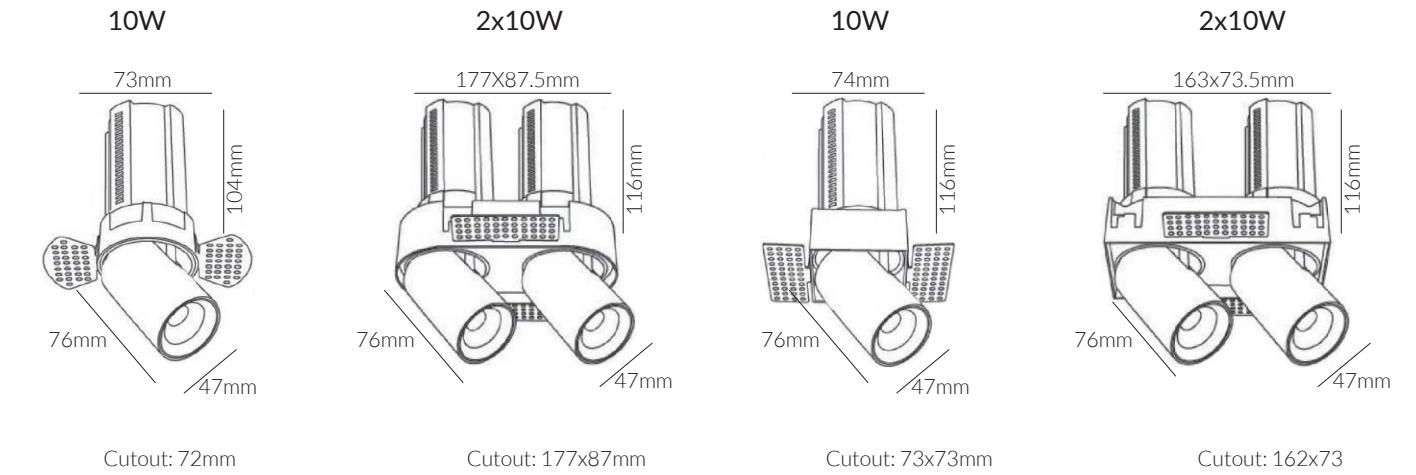

ESTROCHO

ADJUSTABLE SPOTLIGHT



SYV | Recessed Spotlights

Product Specifications:

Lamp Type: BRIDGELUX LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



SKU 17275



SKU 17276


Product Options:

Wattage: 6W / 10W
CCT: 3000K - 6000K
Beam Angle: 15°/24°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Estrocho	17275	10W	3000K	640lm	180mA	30°	Ø90x70	Ø75
	17276	10W	3000K	640lm	180mA	30°	Ø90x70	Ø75

AC220-240V IP 44  CRI>90 PF>0.5

 SDCM <3  Class II  UGR<19 

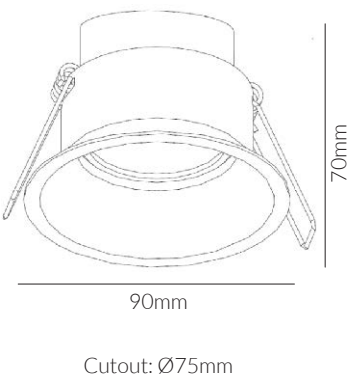

Product Specifications:

Lamp Type: BRIDGELUX LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 11W/14W/16W/20W/30W/40W/50W
CCT: 3000K - 6000K
Beam Angle: 10°/15°/38°
Finish: Mirror Dark/Champagne Gold/Rose Gold/Mirror Silver
Control: Switchable / DALI / 1-10V / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Santino	17457	10W	3000K	650lm	250mA	60°	Ø90x56	Ø75

AC220-240V

IP44

60°

CRI>90


PF>0.9

SDCM <3

Class II

UGR<19



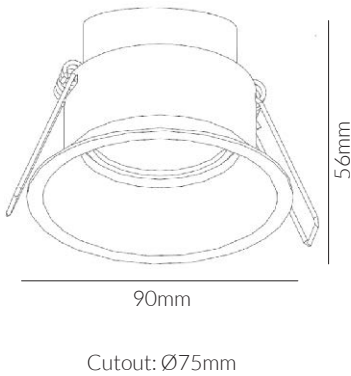

SANTINO
HONEYCOMB LOUVRE





Product Specifications:

Lamp Type: CITIZEN LED
Driver: TRIDONIC
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 12W
CCT: 3000K - 6000K
Beam Angle: 11°/15°/18°/24°/50°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

				SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)		
Moreno				17963	10W	3000K	600lm	250mA	36°	Ø72x110.5	Ø70		
AC220-240V	IP 44	 36°	CRI>90	PF>0.9				 SDCM <3			 Class II	 UGR<19	

Optional Accessories:



UV processed
black cup




Highly specular
aluminium



Gold



White



Cutout: 70mm



Product Specifications:

Lamp Type: PHILIPS LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 30W
CCT: 3000K - 6000K
Beam Angle: 15°/24°/36°/60°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Ring Color: Black / Gold

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Menos (Trimless)	14932	10W	3000K	650lm	250mA	30°	Ø70.5x103	Ø70.5
	14904	15W	3000K	975lm	350mA	60°	Ø101x119	Ø101
	15168	20W	3000K	1,300lm	500mA	30°	Ø101x119	Ø101
	16238	20W	4000K	1,400lm	500mA	24°	Ø101x119	Ø101

AC220-240V

IP 44



CRI>90

PF>0.9



SDCM <3



Class II







UGR<19



Flicker Free



CE

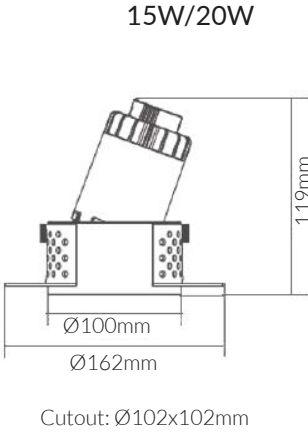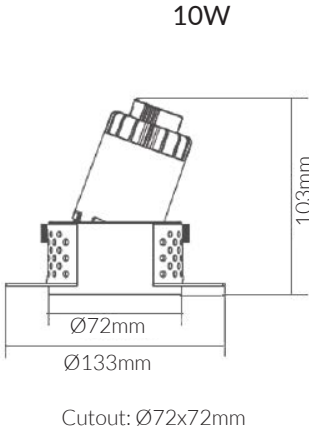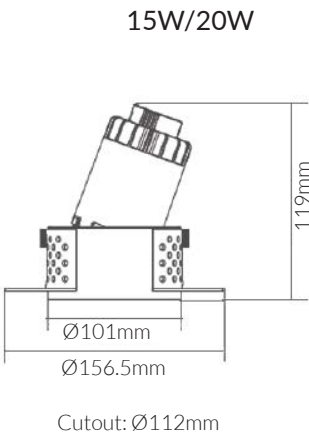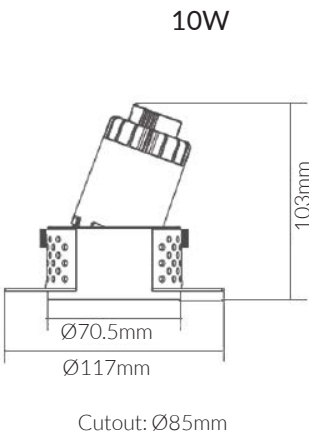

Product Specifications:

Lamp Type: PHILIPS LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 30W
CCT: 3000K - 6000K
Beam Angle: 15°/24°/36°/60°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Ring Color: Black / Gold

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cortar (Trimless)	14933	10W	3000K	650lm	250mA	30°	Ø72x103	Ø72x72
	16215	15W	3000K	975lm	350mA	30°	Ø100x119	Ø100x100
	14934	20W	3000K	1,300lm	500mA	30°	Ø100x119	Ø100x100

AC220-240V

IP 44



CRI>90

PF>0.5



SDCM <3



Class II



UGR<19



Flicker Free



CE



Product Specifications:

Lamp Type: BRIDGELUX LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 6W
CCT: 3000K - 6000K
Beam Angle: 10°/15°/38°
Finish: Black
Control: Switchable / DALI / 1-10V / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Micro	17271	9W	3000K	630lm	135mA	36°	Ø75x100	Ø65

AC220-240V

IP44

36°

CRI>90

PF>0.5


SDCM <3

Class II

UGR<19

Flicker Free



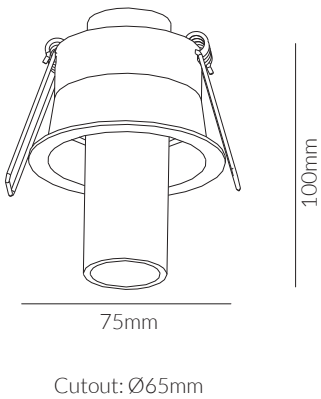

MICRO
ADJUSTABLE SPOT

Product Specifications:

Lamp Type: CITIZEN LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 20W / 25W
CCT: 3000K - 6000K
Control: Switchable / DALI / 1-10V / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Lava X	17961	15W	3000K	1,275lm	350mA	36°	Ø84x71	Ø75

AC220-240V

IP44

36°

CRI>90


PF>0.5

SDCM <3

Class II

UGR<19





Cutout: Ø65mm



LAVA X

Product Specifications:

Lamp Type: CITIZEN LED
Driver: TRIDONIC
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White+Black Chrome Reflector
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 3W/5W/8W/10W
CCT: 3000K - 6000K
Beam Angle: 11°/15°/18°/24°/50°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Varo	16819	8W	3000K	640lm	200mA	50°	Ø85x110	Ø75
	(1-10V) 16737	12W	3000K	960lm	200mA	60°	Ø85x110	Ø75
	16786	12W	3000K	720lm	200mA	36°	Ø85x110	Ø75


AC220-240V IP 44  CRI>90 PF>0.5

 SDCM <3  Class II  UGR<19 



VARO



8W / 12W



Cutout: 75mm

Six kinds of optical accessories, seven kinds of face ring accessories, more than a hundred different collocation, to achieve the precise control of beam angle and spot effect, giving the space more vivid emotion.

Optional Accessories for Varo Spotlight

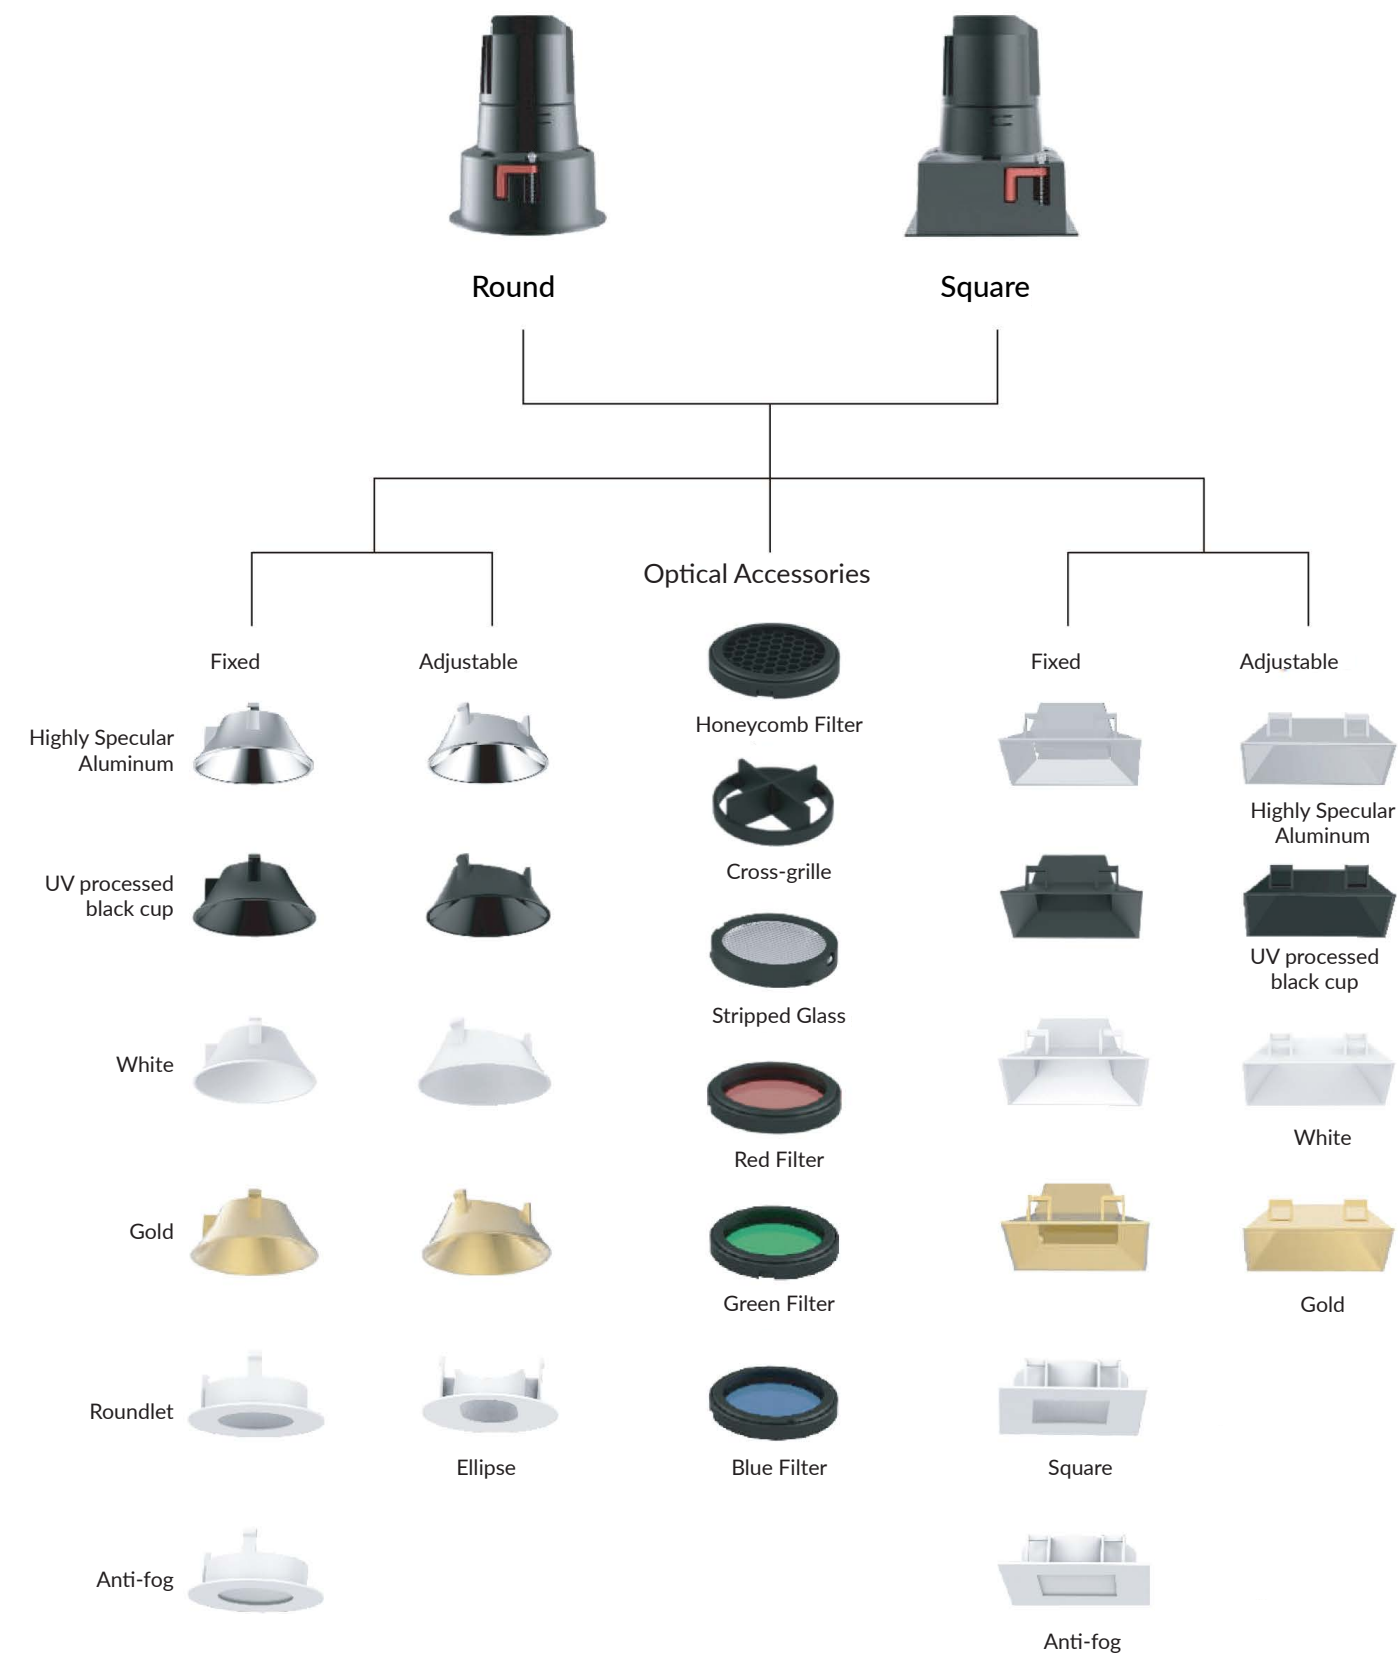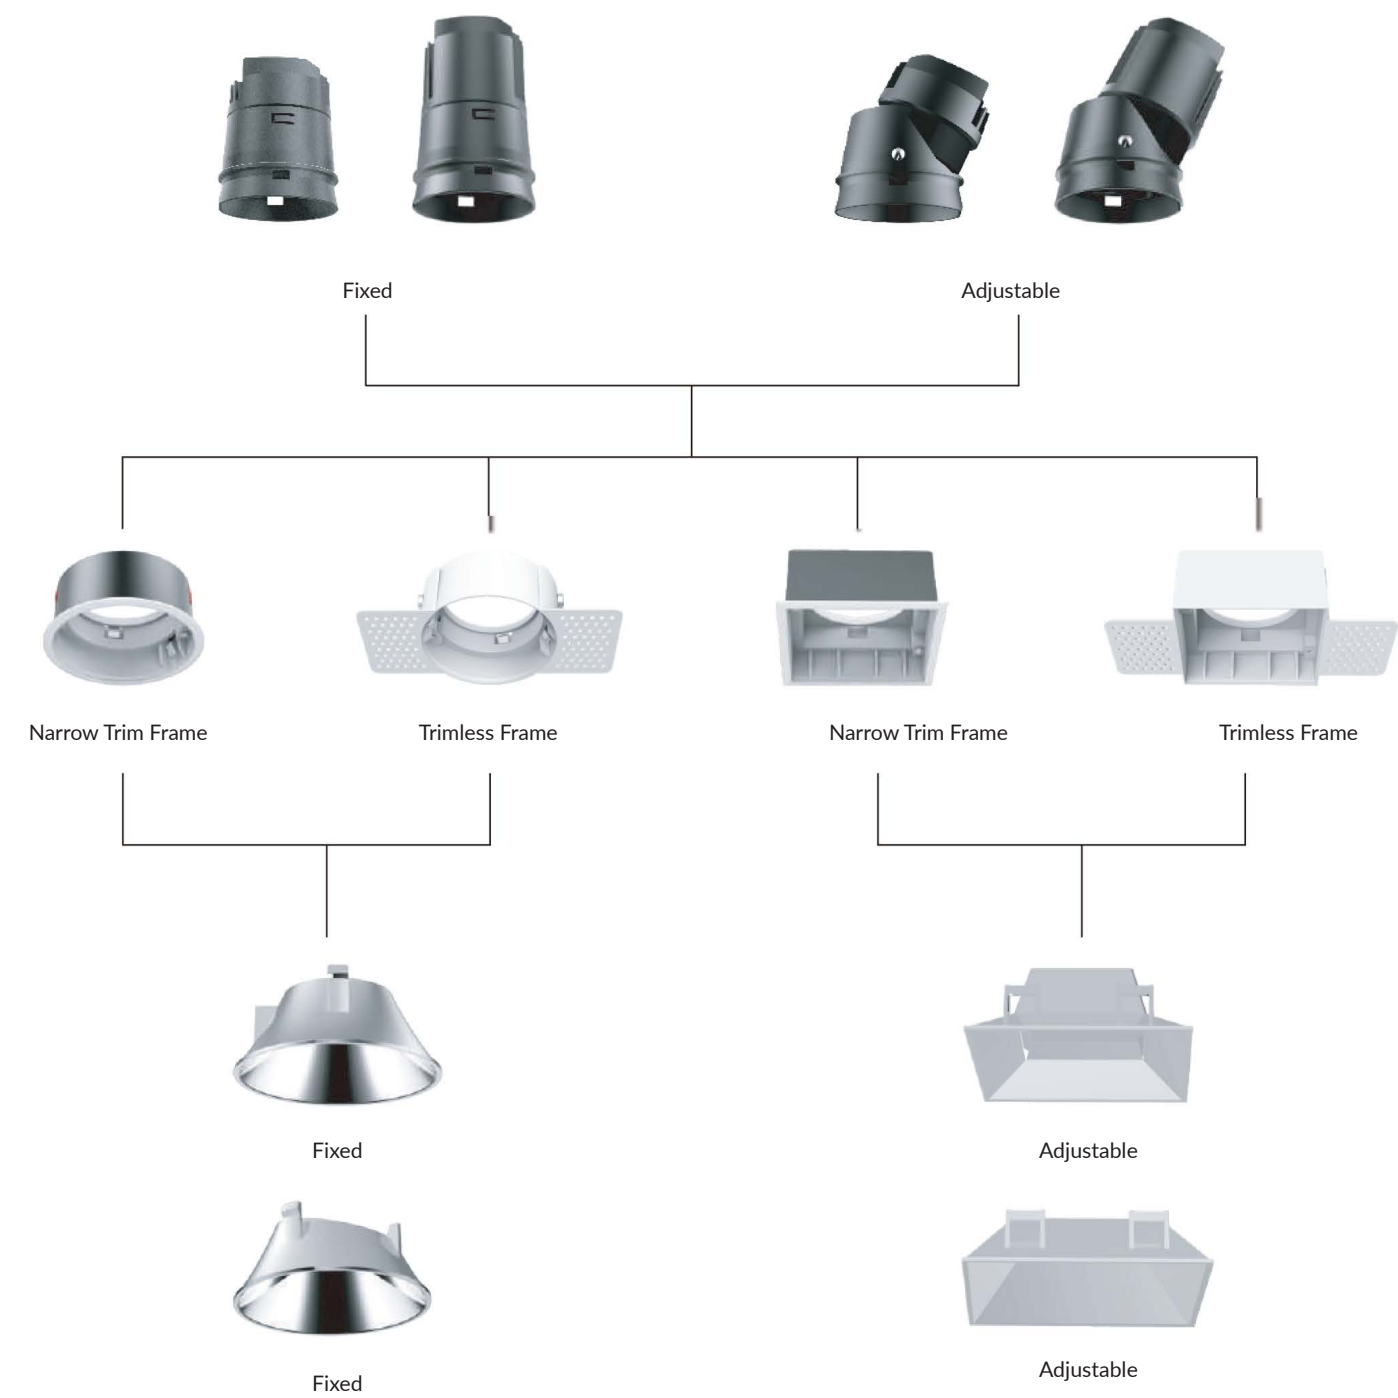



DESTA PRO



SYV | Recessed Spotlights

Product Specifications:


Lamp Type: LUMINUS LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White+Iron Grey
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 2W / 3W / 8W
CCT: 3000K - 6000K
Beam Angle: 15°/36°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Reflector Colour: Black / WHite / Gold

				SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Desta Pro				17045	5W	3000K	300lm	1000mA	30°	Ø50x62	Ø45
AC220-240V	IP 44		CRI>90	PF>0.9	SDCM <3 Class II UGR<19 						

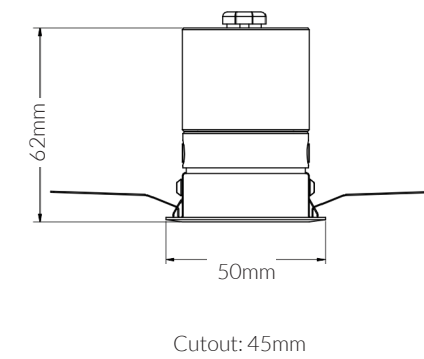



Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +40°C
Material: 6063 Aluminum & PC reflector
Finish: White Trim Black Inside
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 1W / 7W
CCT: 3000K - 6000K
Beam Angle: 10°/24°
Control: Switchable / DALI / 1-10V / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Dita	14936	3W	3000K	180lm	670mA	15°	Ø55x61	Ø45
	14937	7W	3000K	357lm	230mA	15°	Ø65x71	Ø55
	15335	7W	4000K	420lm	230mA	15°	Ø65x71	Ø55

AC220-240V

IP 44

45°

CRI>90

PF>0.9




SDCM <3

Class II

UGR<10



DITA

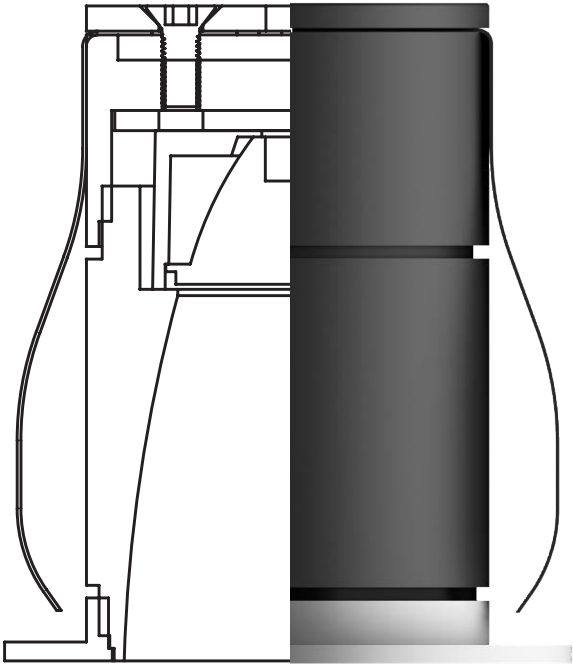




SYV | Recessed Spotlights

Product Specifications:

Lamp Type: PHILIPS LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

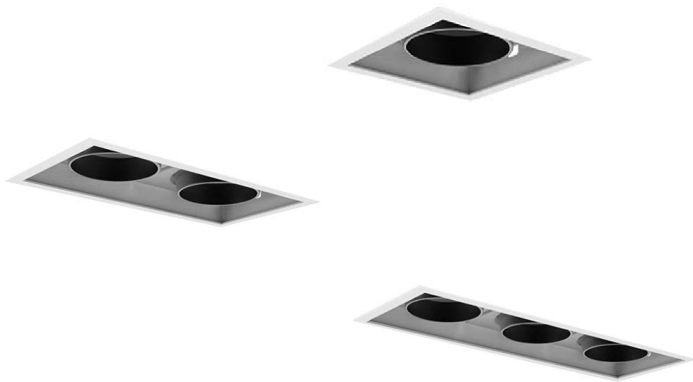


Product Options:

Wattage: 7W/12W/18W
CCT: 3000K - 6000K
Beam Angle: 10°/15°/38°
Control: Switchable / DALI / 1-10V / 0-10V


	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Casa	14921	8W	3000K	640lm	200mA	36°	Ø93x103	Ø82x82
	14922	2x8W	3000K	1,280lm	200mA	36°	173x93x103	Ø162x82
	16877	2x8W	3000K	1,28lm	200mA	36°	173x93x103	Ø162x82
	14923	3x8W	3000K	1,920lm	200mA	36°	252x93x103	Ø242x82
	15327	3x8W	4000K	2,040lm	200mA	36°	252x93x103	Ø242x82

AC220-240V IP 44  CRI>90 PF>0.9


 SDCM <3  Class II  UGR<19 



Cutout: Ø82x82mm

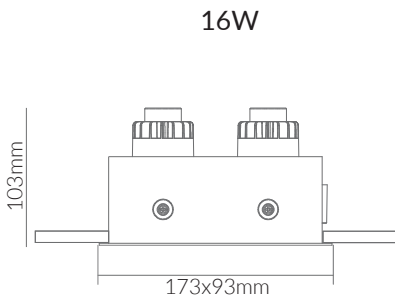

Cutout: Ø162x82mm

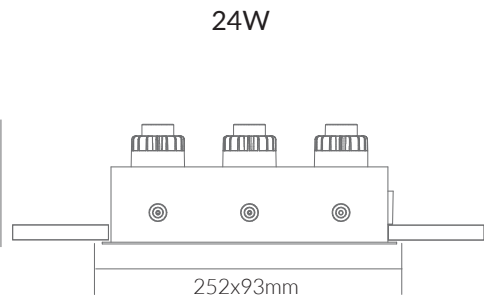

Cutout: Ø242x82mm



Product Specifications:

Lamp Type: PHILIPS LED
Driver: PHILIPS
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White+Iron Grey
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 15W/40W/60W
CCT: 3000K - 6000K
Beam Angle: 15°/24°/36°
Finish: Black+Iron Grey
Control: Switchable / DALI / 1-10V / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Lizo	15337	20W	3000K	1,300lm	500mA	60°	Ø123x178	Ø112x112
	15053	20W	4000K	1,400lm	500mA	60°	Ø123x178	Ø112x112
	15338	2x20W	3000K	2,600lm	500mA	60°	232x123x178	Ø222x112
	15054	2x20W	4000K	2,800lm	500mA	60°	232x123x178	Ø222x112
	15055	3x20W	3000K	3,600lm	500mA	60°	342x123x178	Ø332x112
	15339	3x20W	4000K	3,900lm	500mA	60°	342x123x178	Ø332x112

AC220-240V

IP 44

60°

CRI>90




PF>0.9

SDCM <3

Class II

UGR<19



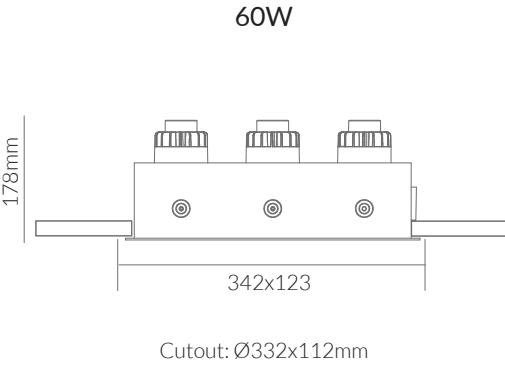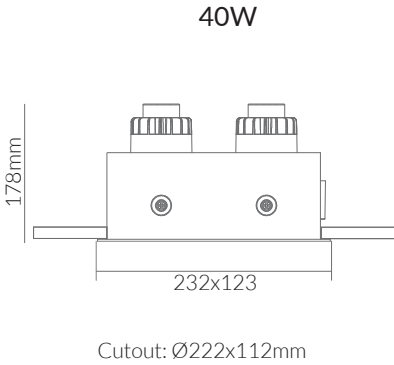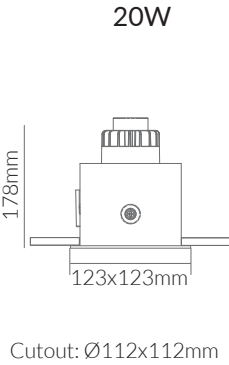

Product Specifications:

Lamp Type: PHILIPS LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: Black+Iron Grey
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 24W
CCT: 3000K - 6000K
Beam Angle: 15°/36°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Rejilla (Trimless)	(TRIAC)15456	8W	3000K	680lm	200mA	24°	Ø125x105	Ø86x86
	15457	2x8W	3000K	1,360lm	200mA	24°	205x85x135	Ø166x86
	14918	30W	3000K	1,950lm	700mA	30°	197x125x140	Ø126x126
	14919	2x30W	3000K	3,900lm	700mA	30°	317x125x175	Ø246x126
	14920	3x30W	3000K	5,850lm	700mA	45°	427x125x175	Ø356x126
	(TRIAC)15341	3x30W	4000K	6,300lm	700mA	45°	427x125x175	Ø356x126

AC220-240V

IP 44

60°

CRI>90






PF>0.9

SDCM <3

Class II

UGR<19



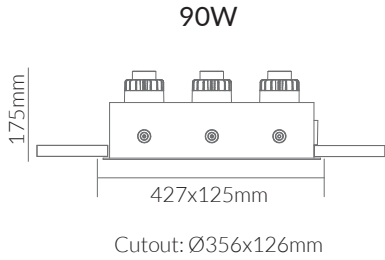

Product Specifications:

Lamp Type: CREE LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 10W / 15W / 20W / 25W / 35W / 40W
CCT: 3000K - 6000K
Beam Angle: 20°/28°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Lugar X	17585	30W	4000K	2,550lm	700mA	40°	Ø190x160	Ø175
	15732	30W	6000K	2,700lm	700mA	40°	Ø190x160	Ø175

AC220-240V

IP44

40°

CRI>90

PF>0.9


SDCM <3

Class II

UGR<19

Flicker Free



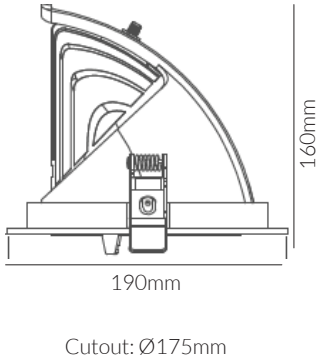

LUGAR X



Product Specifications:

Lamp Type: BRIDGELUX LED
Driver: LIFUD PHASE Dimming Driver
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Beam Angle: 24°
Mounting Option: Surface Mounted
Control: Switchable / DALI / 1-10V / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ira (R)	(TRAIC) 18008	10W	3000K	950lm	250mA	38°	Ø85x63	Ø70
	(TRAIC) 18009	10W	3000K	950lm	250mA	38°	Ø85x63	Ø70
Ira (S)	(TRAIC) 18010	10W	3000K	950lm	250mA	38°	Ø85x63	Ø70
	(TRAIC) 18011	10W	3000K	950lm	250mA	38°	Ø85x63	Ø70

AC220-240V

IP44

38°

CRI>90

PF>0.9



SDCM <3

Class II

UGR<19

Flicker Free







Product Specifications:

Lamp Type: PHILIPS LED
Driver: PHILIPS
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:


Wattage: 5W / 8W
CCT: 3000K - 6000K
Beam Angle: 15°/24°/30°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Genssen	13318	10W	3000K	650lm	250mA	36°	Ø90x100	Ø80
	15391	10W	4000K	700lm	250mA	36°	Ø90x100	Ø80
	13746	10W	6000K	750lm	250mA	36°	Ø90x100	Ø80
Genssen (Black)	(TRIAC) 17198	10W	3000K	650lm	250mA	15°	Ø90x100	Ø80
	(TRIAC) 17200	10W	3000K	650lm	250mA	36°	Ø90x100	Ø80
	(TRIAC)17199	20W	3000K	1,500lm	500mA	30°	Ø130x110	Ø105
Genssen X	15681	20W	4000K	1,600lm	500mA	30°	Ø120x98	Ø110

AC220-240V IP 44 30/36°/60° CRI>90 PF>0.9


SDCM <3 Class II UGR<19 CE

10W




Cutout: Ø80mm

20W



Cutout: Ø105mm

Genssen X



Cutout: Ø110mm

Product Specifications:

Lamp Type: PHILIPS LED
Driver: PHILIPS
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:


Wattage: 15W
CCT: 3000K - 6000K
Beam Angle: 15°/24°/30°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Genssen	13321	20W	3000K	1,500lm	500mA	60°	Ø130x110	Ø105
	15392	20W	4000K	1,600lm	500mA	60°	Ø130x110	Ø105
	13747	20W	6000K	1,700lm	500mA	30°	Ø130x110	Ø105
Genssen Square	(TRIAC) 14697	10W	3000K	650lm	250mA	36°	Ø90x100	Ø80x80
	15660	10W	4000K	700lm	250mA	36°	Ø90x100	Ø80x80
	15393	20W	3000K	1,500lm	500mA	36°	Ø130x119	Ø105x105

AC220-240V IP 44 30/36°/60° CRI>90 PF>0.9


SDCM <3 Class II UGR<19 CE

20W




Cutout: Ø105mm

Gen S.10W



Cutout: Ø80x80mm

Gen S.20W



Cutout: Ø105x105mm



Product Specifications:

Lamp Type: EPISTAR LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 30,000 Hours
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 3W / 16W / 24W / 30W / 40W / 50W
CCT: 3000K - 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cubo	15572	6W	3000K	480lm	300mA	40°	Ø85x56	Ø75
	15573	9W	3000K	720lm	300mA	40°	Ø85x66	Ø75

AC220-240V

IP44

40°

CRI>90

PF>0.9



SDCM <3

Class II

UGR<19

Flicker Free



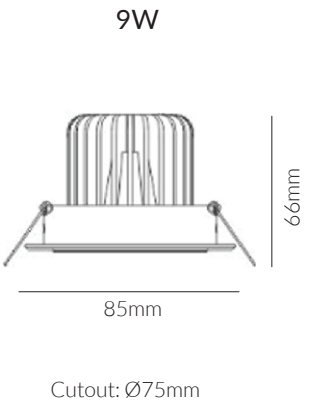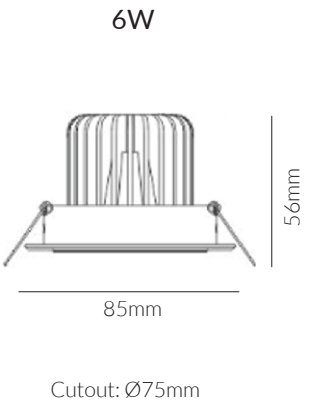



MATIAS

IP65 - Fire Rated

SYV | Recessed Spotlights

Product Specifications:

Lamp Type: EPISTAR LED
Operating Temp.: -20°C ~ +50°C
Material: Iron + PC Body
Finish: White+Iron Grey
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Tilttable Interchangeable Bezel



Chrome




Black

Product Options:

Beam Angle: 38°
Control: Switchable / DALI / 1-10V / 0-10V
Bezel: Chrome / Black

		SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Matias		(TRIAC) 19163	5W/8W	2700K/3000K/ 4000K/6000K	460-540lm(5W), 720-840lm(8W)	60~100mA	60°	Ø90x40	Ø65
AC220- 240V	IP 65	 60°	CRI>90	PF>0.9	 SDCM <3  Class II  UGR<19 				

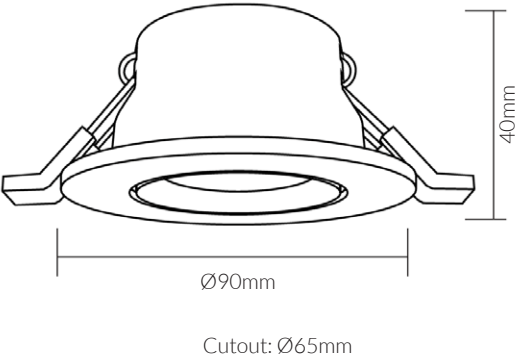

Product Specifications:


Lamp Type: CREE LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White+Black gun cup
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Beam Angle: 15°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

					SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Nuco (Trimless)					19099	3W	3000K	90lm	700mA	24°	Ø60x57	Ø30
AC220-240V	IP 44		CRI>90	PF>0.9	SDCM <3 Class II UGR<13 Flicker Free 							

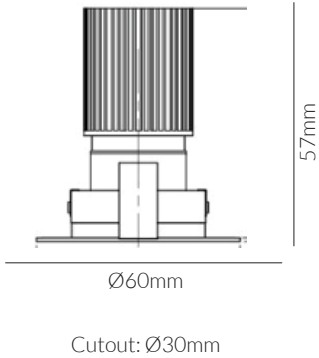

Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Control: Switchable / DALI / 1-10V / 0-10V

		SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)		
Kreon		(Trimless) 18522	10W	3000K/ 4000K/6000K	900lm/950lm/ 1000lm	250mA	60°	Ø85x50	Ø75		
AC220- 240V	IP 44	 CRI>90	PF>0.9					 SDCM <3	 Class II	 UGR<19	

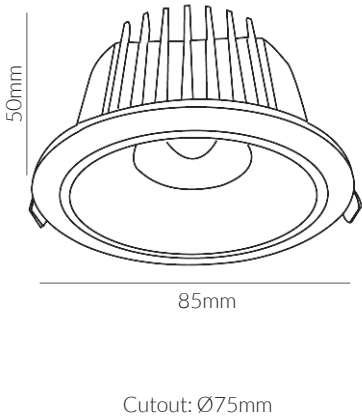

Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Aluminum body+Honeycomb
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 7W / 18W
CCT: 3000K - 6000K
Beam Angle: 15°/24°
Control: Switchable / DALI / 1-10V / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Savino (Round)	19182	10W	3000K/4000K/6000K	600lm/650lm/700lm	250mA	38°	Ø85x62	Ø75
AC220-240V IP44  CRI>90 PF>0.9  Class II  								

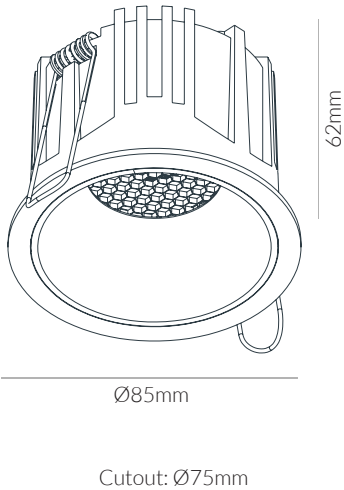

Product Specifications:




Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Aluminum body+Honeycomb
Finish: White, White+Inner Black, Black+Inner Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 7W / 18W
CCT: 3000K - 6000K
Beam Angle: 15°/24°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

		SKU	W	CCT	LM	mA	Beam	Finish	Size(mm)	Cut(mm)			
Savino (Square)		19876	10W	3000K/4000K/ 6000K	600lm/650lm/ 700lm	250mA	38°	White+Inner White	85X85X62	Ø75X75			
		19183	10W	3000K/4000K/ 6000K	600lm/650lm/ 700lm	250mA	38°	White+Inner Black	85X85X62	Ø75X75			
		19873	10W	3000K/4000K/ 6000K	600lm/650lm/ 700lm	250mA	38°	Black+Inner Black	85X85X62	Ø75X75			
		19877	2x10W	3000K/4000K/ 6000K	1200lm/1300lm/ 1400lm	250mA	38°	White+Inner White	167X85X62	Ø160X75			
		19184	2x10W	3000K/4000K/ 6000K	1200lm/1300lm/ 1400lm	250mA	38°	White+Inner Black	167X85X62	Ø160X75			
		19874	2x10W	3000K/4000K/ 6000K	1200lm/1300lm/ 1400lm	250mA	38°	Black+Inner Black	167X85X62	Ø160X75			
		19878	3x10W	3000K/4000K/ 6000K	1800lm/1950lm/ 2100lm	250mA	38°	White+Inner White	250X85X62	Ø240X75			
		19185	3x10W	3000K/4000K/ 6000K	1800lm/1950lm/ 2100lm	250mA	38°	White+Inner Black	250X85X62	Ø240X75			
		19875	3x10W	3000K/4000K/ 6000K	1800lm/1950lm/ 2100lm	250mA	38°	Black+Inner Black	250X85X62	Ø240X75			
AC220- 240V	IP 44		CRI>90	PF>0.9									





Product Specifications:

Lamp Type: CITIZEN / PHILIPS LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White+Iron Grey
Reflector: Silver
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 25W / 40W
CCT: 3000K - 6000K
Beam Angle: 15°/36°
Reflector: Black / Gold
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Gutlof	14363	10W	3000K	800lm	250mA	24°	Ø95x125	Ø85
	15159	15W	3000K	1,050lm	350mA	60°	Ø130x142	Ø120

AC220-240V

IP44

40°

CRI>90

PF>0.9



SDCM <3

Class II

UGR<19

Flicker Free



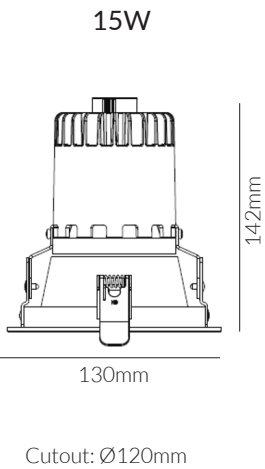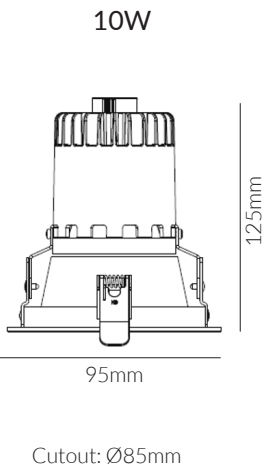

GUTLOF

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +40°C
Material: Stainless Steel
Finish: Gold
Lifespan: 30,000 Hours
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 20W / 25W
CCT: 3000K - 6000K
Beam Angle: 10°/15°/35°/45°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Dimo	(Gold) 16892	1W	3000K	75lm	-	25°	Ø42x29	Ø85
	(Silver) 14471	1W	3000K	75lm	-	25°	Ø42x29	Ø85
Nimo	14470	1W	3000K	75lm	-	25°	Ø42x29	Ø85

AC220-240V IP 44



CRI>90 PF>0.9




SDCM <3



Class II



UGR<19



Cutout: Ø31mm



NIMO/DIMO



Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Aluminium Body
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 0.5W
CCT: 3000K - 6000K
Beam Angle: 15°/20°/25°/38°/60°/90°/20°*40°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Riste	20309	1W	3000K	90lm	200mA	50°	Ø25x8	Ø20
	20310	1W	3000K	90lm	200mA	50°	Ø25x8	Ø20

AC220-240V

IP44

50°

CRI>80

PF>0.5


SDCM <3

Class II

UGR<19

Flicker Free



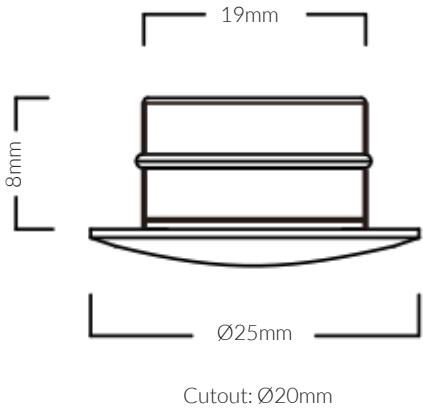

RISTE
OPTICS - LENS



TRACK LIGHTS



ESTIRAR

3 WIRE TRACK

SYV | Track Lights

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: Black & White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:


Wattage: 25W / 35W
CCT: 3000K - 6000K
Beam Angle: 10°/15°/24°/45°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Phase: 1 / 2 Wire

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Estirar	14925	7W	3000K	630lm	600mA	36°	Ø50x135x134	Black
	14926	15W	3000K	1,350lm	350mA	30°	Ø66x180x143	Black
	17944	20W	3000K	1,700lm	500mA	36°	Ø80x180x164	White
	14927	30W	3000K	2,700lm	700mA	30°	Ø80x180x164	Black
	15351	30W	4000K	2,850lm	700mA	36°	Ø80x180x164	Black
	16319	30W	6000K	3,000lm	700mA	36°	Ø80x180x164	Black


AC220-240V IP 20  CRI>92 PF>0.9

 SDCM <3  Class II  UGR<19 


7W



15W



20W/30W



Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 10W
CCT: 3000K - 6000K
Beam Angle: 15°/24°/ 50°
Finish: White
Control: Switchable / DALI / 1-10V / 0-10V
Phase: 1 / 2 Wire


	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Estirar S	18088	15W	3000K	1,350lm	400mA	36°	Ø66x180x165	Black


AC220-240V IP 20  CRI>92 PF>0.9

 SDCM <3  Class II  UGR<19 



ESTIRAR - SURFACE MOUNTED 3 WIRE TRACK

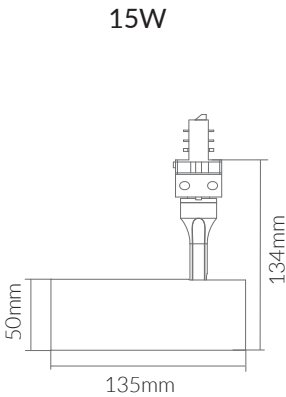

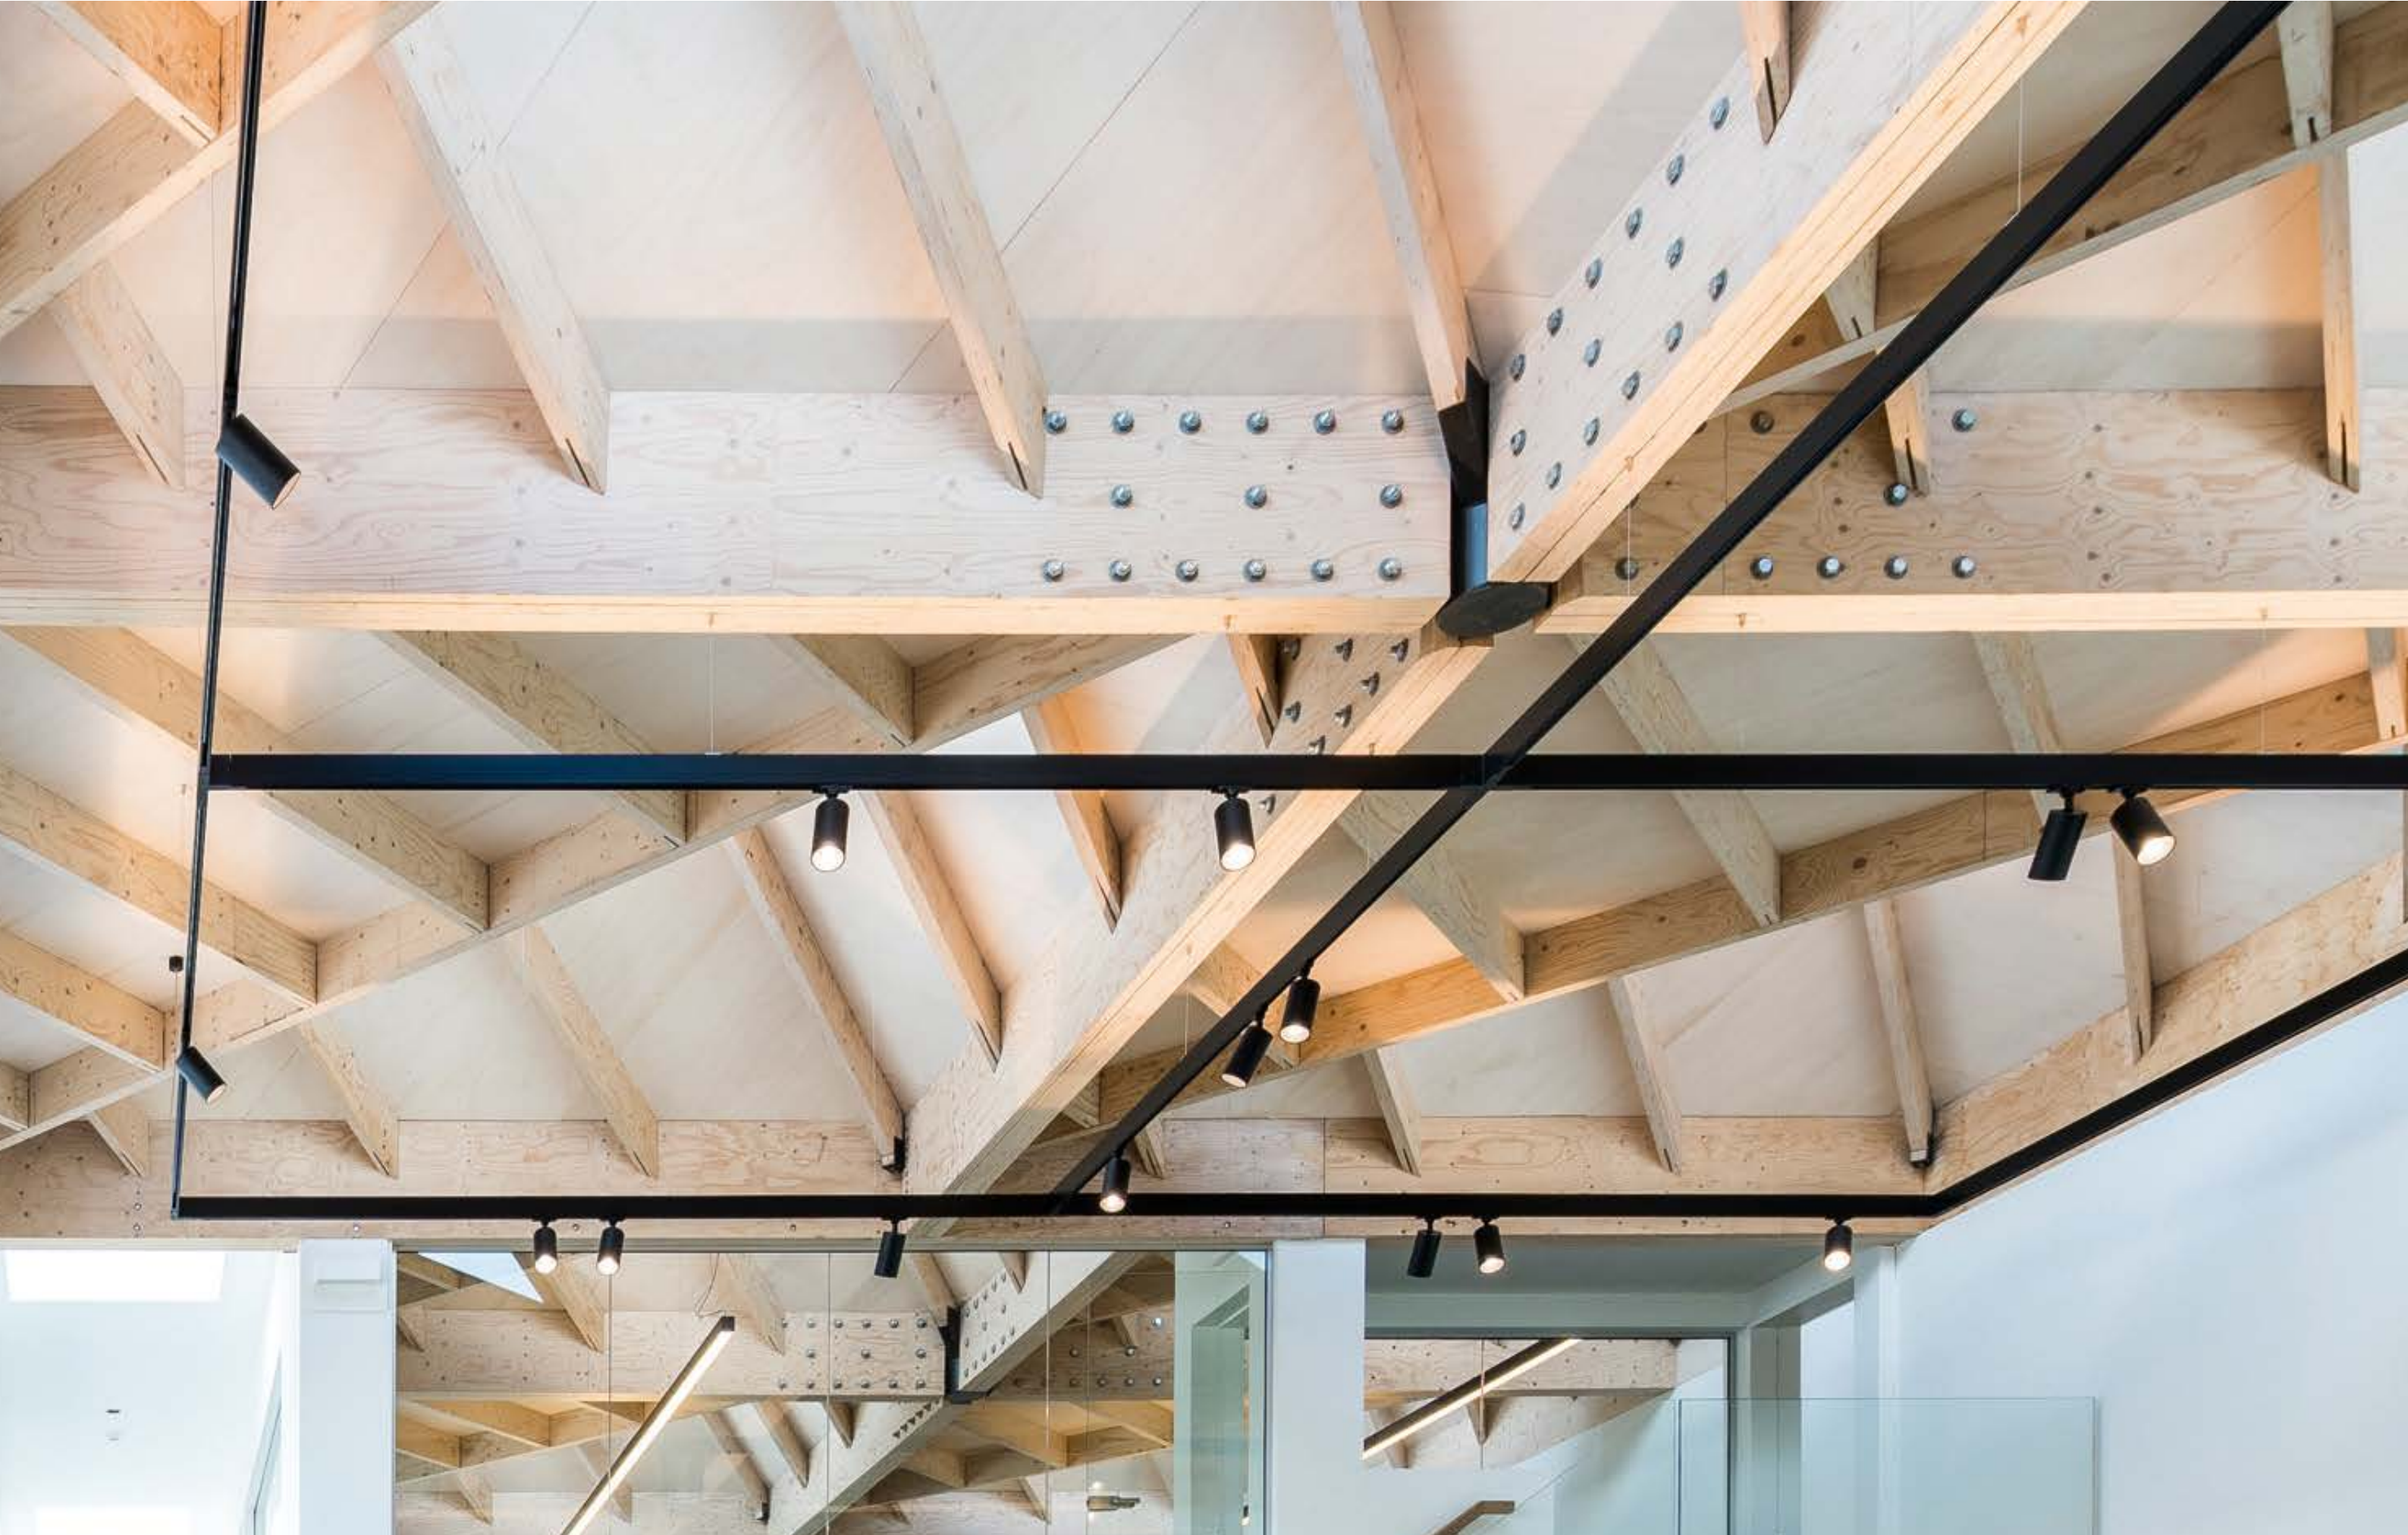

Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +40°C
Material: Stainless Steel
Finish: Gold
Lifespan: 30,000 Hours
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 10W
CCT: 3000K - 6000K
Finish: White
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Phase: 1 / 2 Wire

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Medida	14929	15W	3000K	1,050lm	350mA	15° - 50° (Adjustable)	Ø66x171x163	Black
	15354	15W	4000K	1,125lm	350mA	15° - 50° (Adjustable)	Ø66x171x163	Black
Medida S	16323	15W	3000K	1,050lm	350mA	15° - 50° (Adjustable)	Ø66x171x163	Black

AC220-240V

IP20

15°-50°

CRI>90


PF>0.9

SDCM <3

Class II

UGR<19







Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: Black & White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 30W
CCT: 3000K - 6000K
Beam Angle: 20°/36°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Phase: 1 / 2 Wire

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Capaz	14928	20W	3000K	1,700lm	500mA	30°	Ø95x182	Black
	17694	20W	3000K	1,700lm	500mA	55°	Ø95x182	White

AC220-240V

IP 20

30°/55°

CRI>90


PF>0.9

SDCM <4

Class II

UGR<19



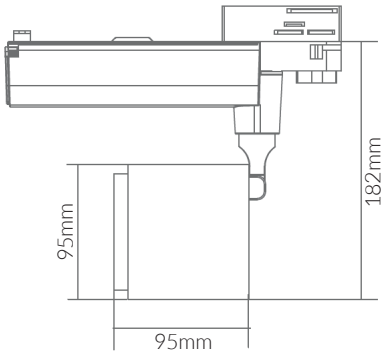

CAPAZ
WITH HONEYCOMB LOUVRE

Product Specifications:

Lamp Type: CITIZEN LED
Driver: OSRAM
Operating Temp.: -20°C ~ +40°C
Material: Stainless Steel
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality




Product Options:

Wattage: 35W
CCT: 3000K - 6000K
Beam Angle: 15° / 24° / 60°
Finish: White
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Phase: 1 / 2 / 4 Wire

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Sitio	14994	30W	3000K	1,950lm	700mA	36°	Ø95x120x173	Black
	16304	30W	4000K	2,100lm	700mA	36°	Ø95x120x173	Black
	(TRIAC) 16805	30W	3000K	1,950lm	700mA	36°	Ø95x120x173	Black

AC220-240V IP 20  CRI>90 PF>0.9

 SDCM <3  Class II  UGR<19 

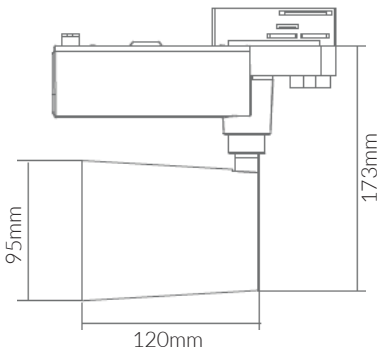



Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: Titanium
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



SKU 14939

SKU 14938


Product Options:

Wattage: 3W / 9W / 15W
CCT: 3000K - 6000K
Beam Angle: 15°/24°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Phase: 1 / 2 Wire

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Latour	14938	7W	3000K	420lm	230mA	36°	Ø40x200	Titanium
	14939	7W	3000K	420lm	230mA	36°	Ø40x200	Titanium

AC220-240V IP 20  CRI>90 PF>0.9

 SDCM <3  Class II  UGR<10 

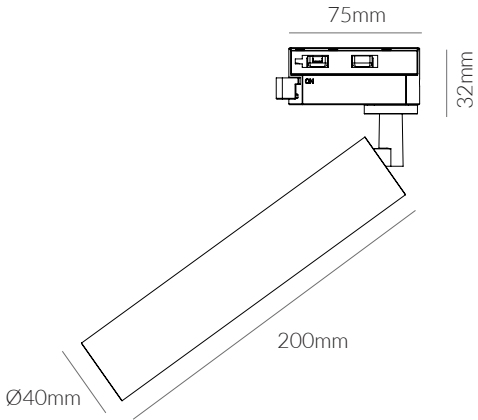

LATOUR
3 WIRE TRACK



LATOUR
SURFACE MOUNTED



MAGNETIC TRACK



VINO

48V MAGNETIC TRACK

SYV | MagneticTrack Lights

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:




Wattage: 7W / 22W / 30W
CCT: 2700K-6000K
Finish: Sandy White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vino	17920	15W	3000K	1050lm	310mA	110°	Ø574x22x43	-
	(Gimbal Linear)17924	5W	3000K	300lm	100mA	110°	Ø154x22x104	-
	(Right Angle Linear)17921	15W	3000K	1050lm	310mA	110°	Ø308x22x43	-

DC48VIP 20CRI>90PF>0.9

SDCM <3Class IIIGR<19

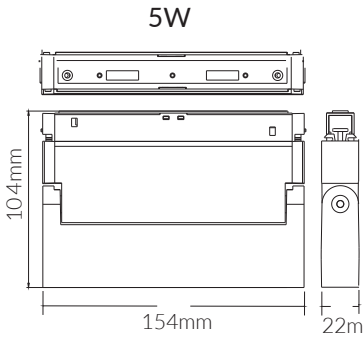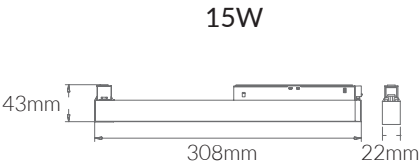

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 20W
CCT: 2700K-6000K
Finish: Sandy White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vino	17249	10W	4000K	905lm	400mA	120°	Ø280x35x59	-
	17364	20W	4000K	1600lm	800mA	120°	Ø652x35x59	-
	17248	20W	4000K	1600lm	833mA	90°	Ø640x35x180	-

DC24VIP 20

120°/90°


CRI>90PF>0.9

SDCM <3

Class III

UGR<19



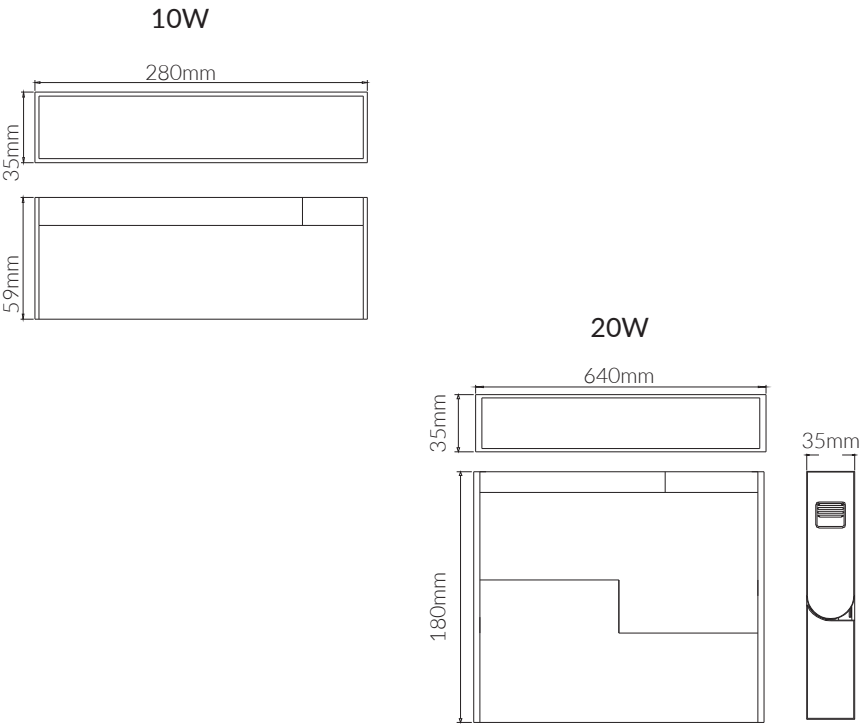

Safety buckle,
double insurance



Even light emission,
no dark area

VINO

24V MAGNETIC TRACK



VINO(0-10V)

48V MAGNETIC TRACK

SYV | MagneticTrack Lights

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



17731



18319

Product Options:

Wattage: 7W / 22W / 30W
CCT: 2700K-6000K
Finish: Sandy White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vino	17731	15W	3000K	900lm	-	110°	Ø574x22x43	-
	(Right Angle Linear)18319	15W	3000K	1050lm	-	110°	Ø308x22x43	-

DC48V

IP 20

110°

CRI>90



PF>0.9

SDCM <3

Class III

UGR<19



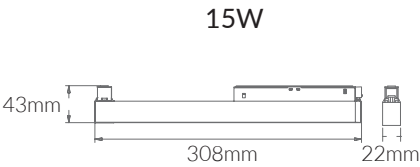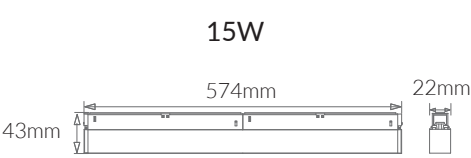



ACENTO

48V MAGNETIC TRACK

SYV | MagneticTrack Lights

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



17502



17922



17923




Product Options:

CCT: 2700K-6000K
Finish: Sandy White
Beam angle: 15°/30°
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Acento	17502	12x1W	3000K	840lm	250mA	41°	Ø294x22x43	-
	17922	6x2W	3000K	840lm	250mA	45°	Ø154x22x43	-
	17923	6x2W	3000K	780lm	250mA	45°	Ø294x22x104	-


DC48V IP 20  CRI>90 PF>0.9

 SDCM <3  Class III  UGR<15 

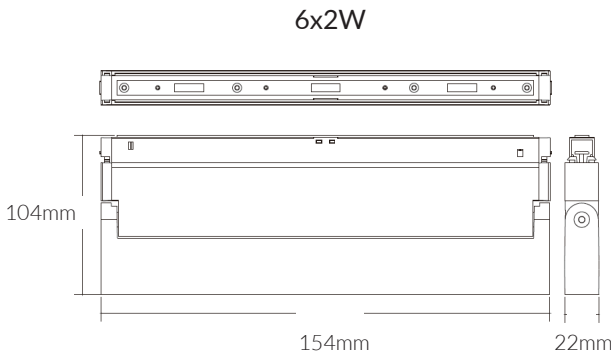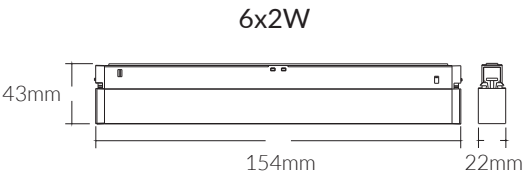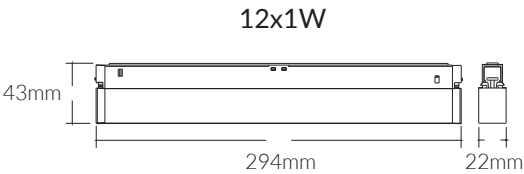

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



17231/17208/17365



17366/17207

Product Options:


Wattage: 20W/10W
CCT: 2700K-6000K
Finish: Sandy White
Beam angle: 15°/30°
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Acento	(Phase Dimmable)17231	10x1W	2700K	800lm	400mA	45°	Ø280x35x59	-
	17208	10x2W	4000K	1360lm	800mA	45°	Ø280x35x59	-
	17365	10x1W	4000K	800lm	400mA	45°	Ø280x35x59	-
	17366	10x1W	4000K	800lm	400mA	45°	Ø270x35x180	-
	17207	10x2W	4000K	1600lm	800mA	45°	Ø270x35x180	-



DC24V IP 20  CRI>90 PF>0.9

 SDCM <3  Class III  UGR<19 

17231/17208/17365

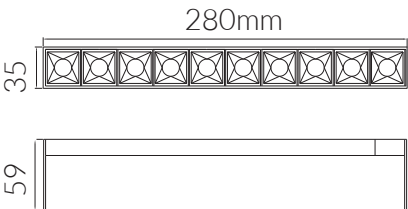

17366/17207

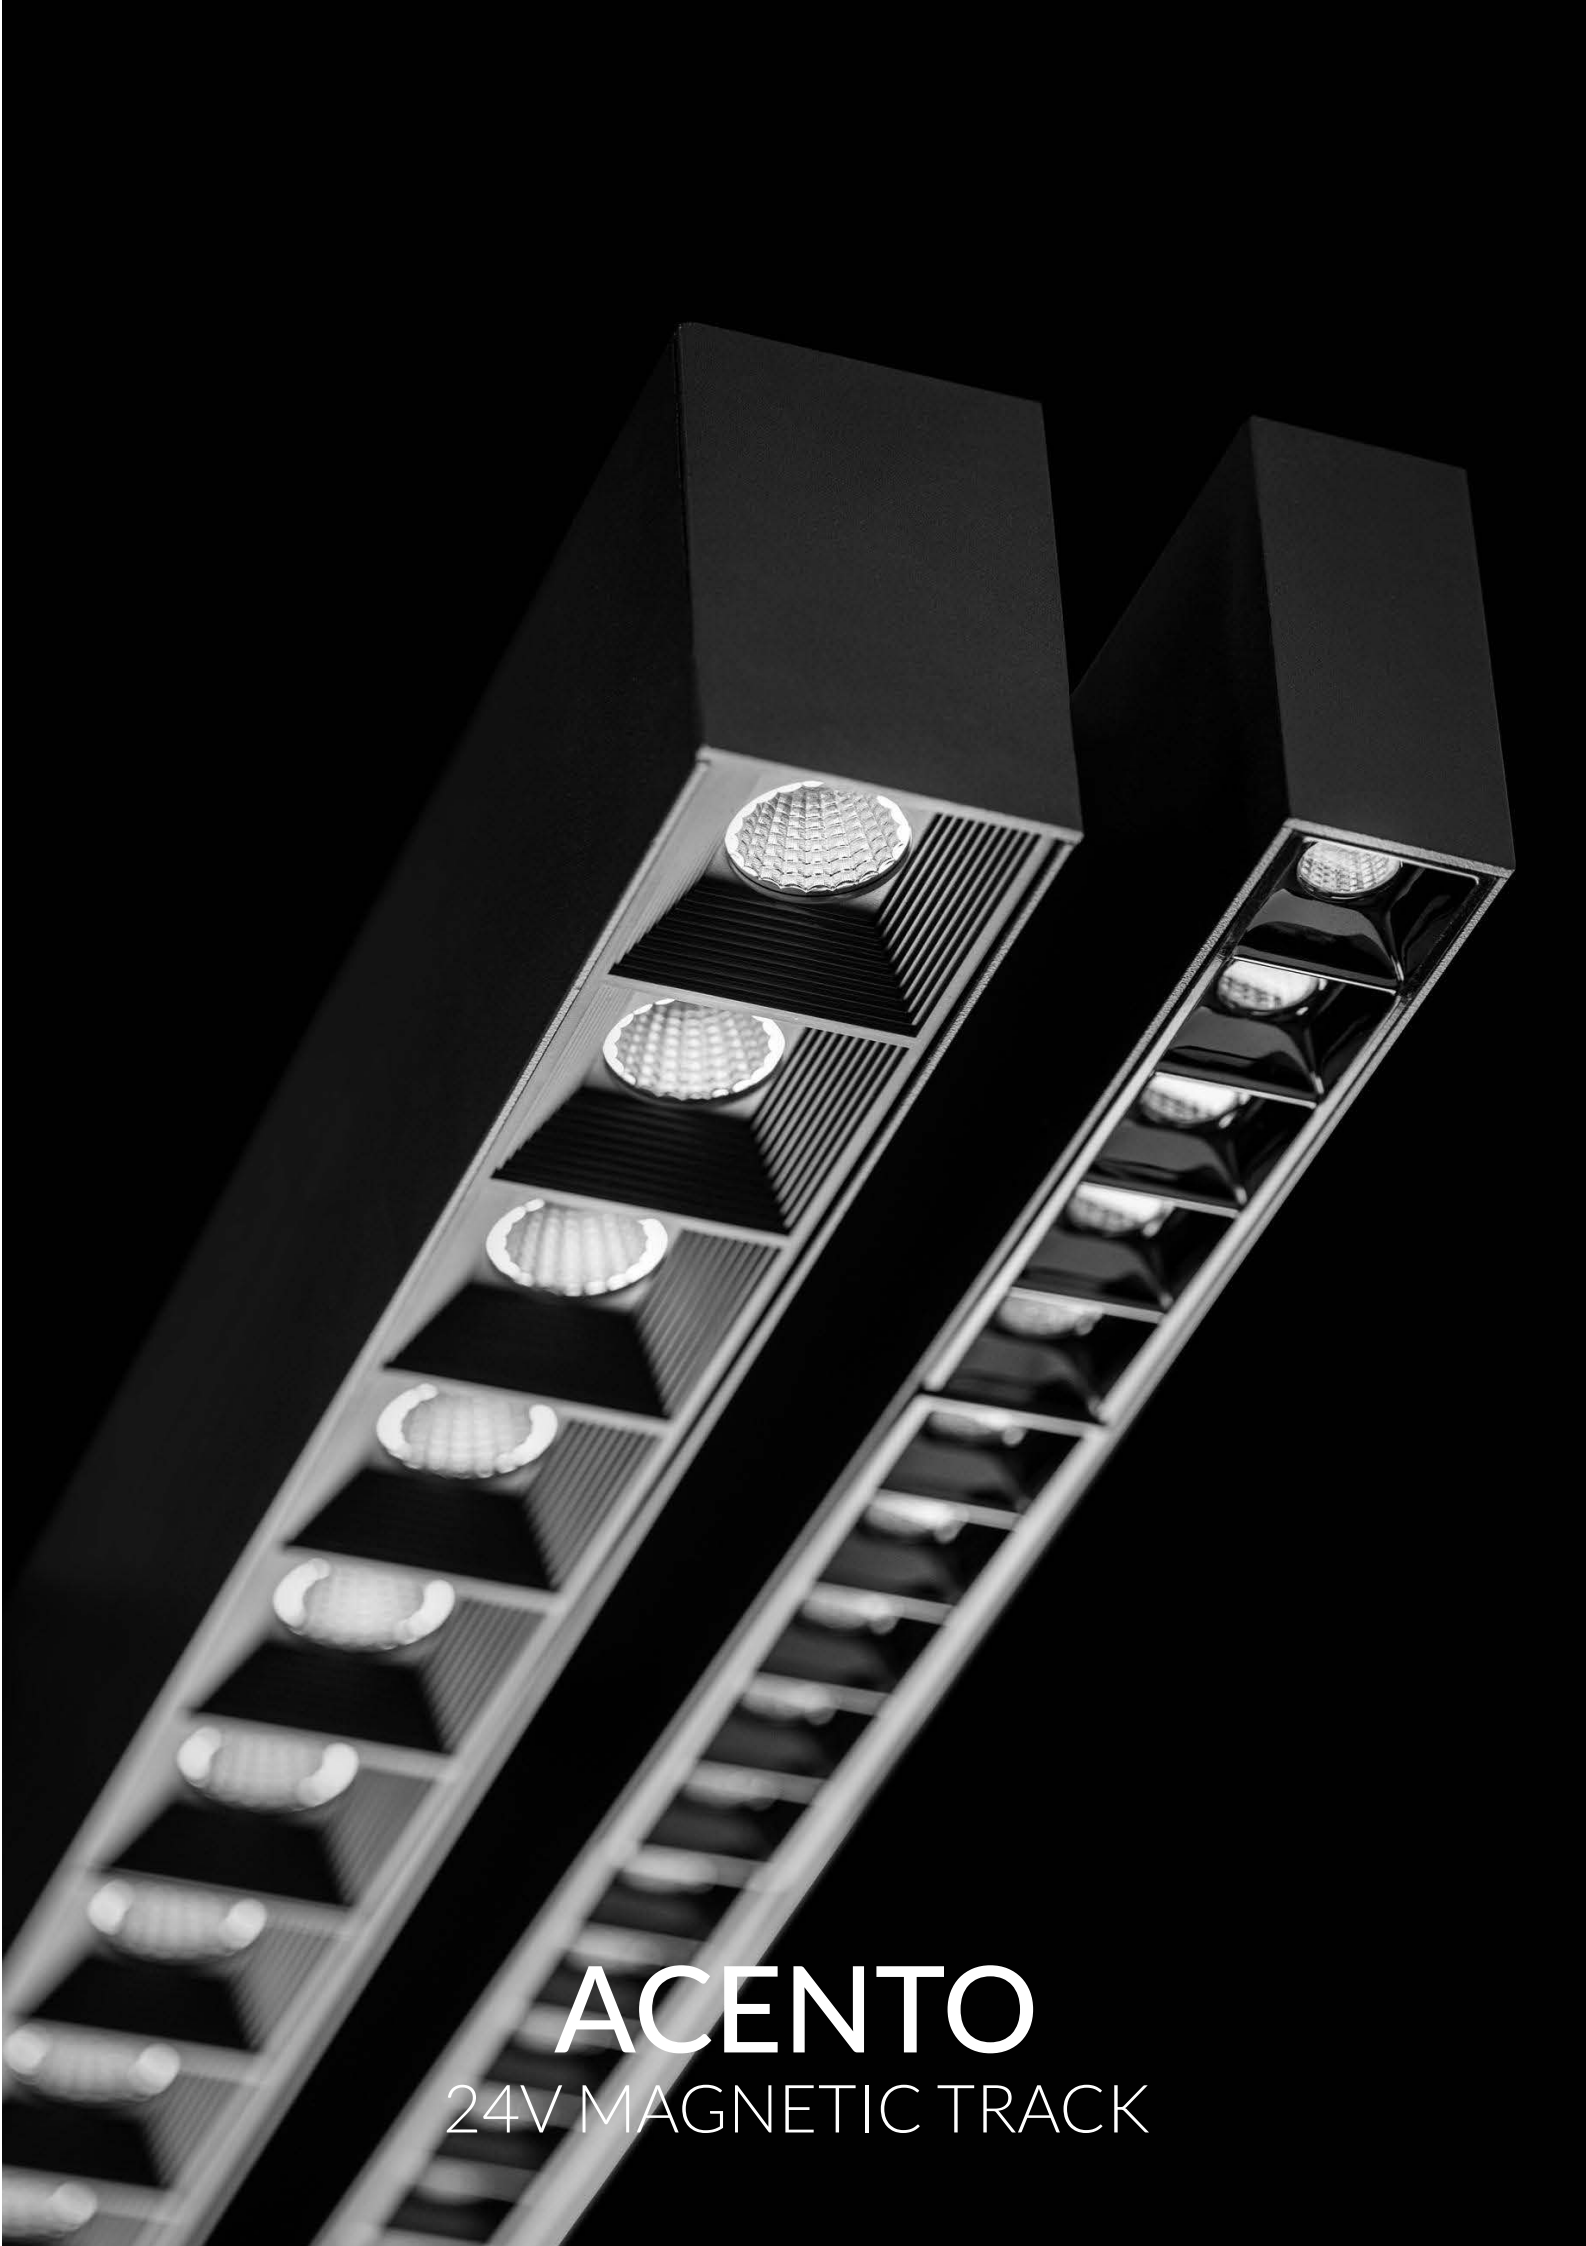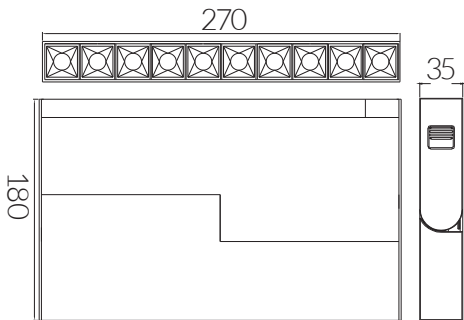

ACENTO
24V MAGNETIC TRACK



ACENTO (0-10V)

48V MAGNETIC TRACK

SYV | MagneticTrack Lights

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



17729



18320

Product Options:

Wattage: 20W/10W
CCT: 2700K-6000K
Finish: Sandy White
Beam angle: 15°/30°
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Acento	17729	6x2W	3000K	960lm	-	45°	Ø155x22x43	-
	18320	12x1W	3000K	812lm	-	45°	Ø294x22x104	-

DC48V

IP 20

45°

CRI>90



PF>0.9

SDCM <3

Class III

UGR<19



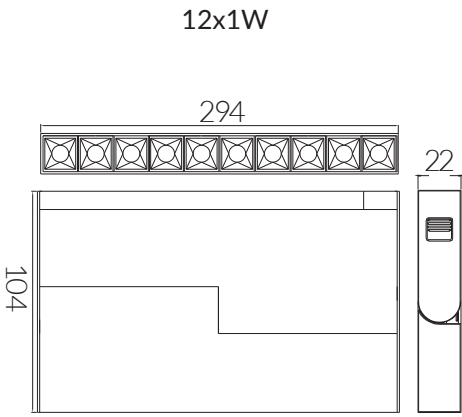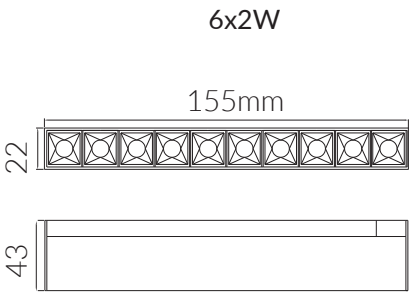

Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 20W / 25W
CCT: 2700K-6000K
Beam angle: 15°/24°
Finish: White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Orza	17269	15W	4000K	1275lm	-	36°	Ø294x22x43	-

DC24V

IP 20



CRI>90


PF>0.9

SDCM <3

Class III

UGR<19



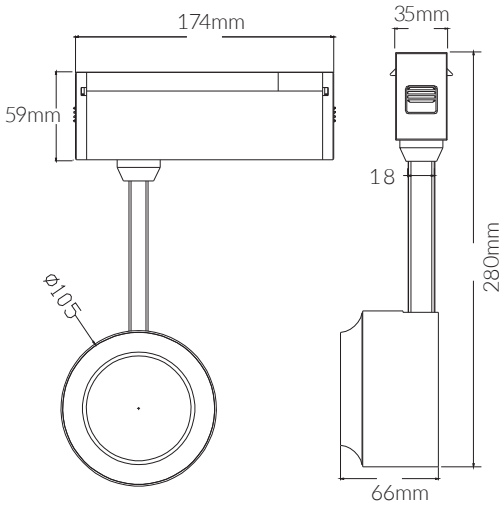

ORZA

24V MAGNETIC TRACK



ENCANTO

48V MAGNETIC TRACK

SYV | MagneticTrack Lights

Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



ZOOMABLE
MAGNETIC TRACK


Product Options:

Wattage: 15W
CCT: 2700K-6000K
Finish: White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Encanto	17388	8W	3000K	480lm	160mA	15° - 36°	Ø155x17x40	-

DC48V IP 20 15°-36° CRI>90 PF>0.9

SDCM <3 Class III UGR<19 CE

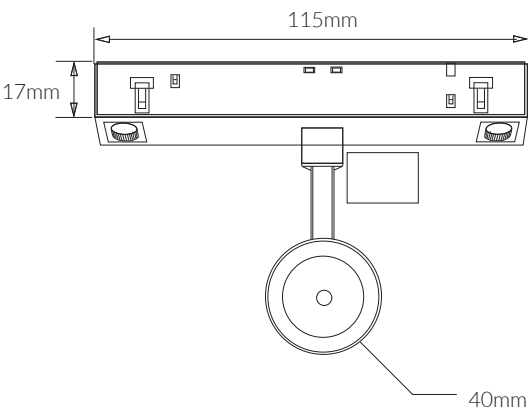

Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 15W
CCT: 2700K-6000K
Finish: White
Beam angle: 15°/24°
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Encanto	17268	8W	4000K	680lm	160mA	36°	Ø155x17x55	-

DC24V

IP20

15°-36°

CRI>90


PF>0.9

SDCM <3

Class III

UGR<19



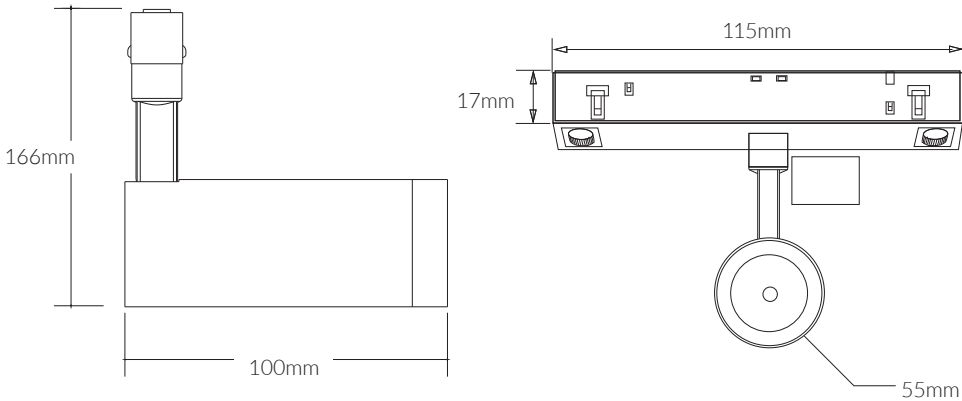

ENCANTO
24V MAGNETIC TRACK



ENCANTO (0-10V)

48V MAGNETIC TRACK

SYV | MagneticTrack Lights

Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



ZOOMABLE
MAGNETIC TRACK

Product Options:

Wattage: 15W
CCT: 2700K-6000K
Finish: White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Encanto	18321	8W	3000K	480lm	160mA	15° - 36°	Ø155x17x40	-

DC48V

IP
20

15°-36°

CRI>90


PF>0.9

SDCM <3

Class III

UGR<19



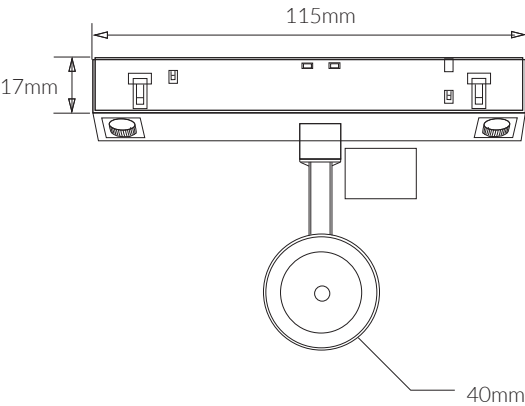

NANO

48V MAGNETIC PENDANT

SYV | MagneticTrack Lights

Product Specifications:


Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 15W
CCT: 2700K-6000K
Finish: White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Nano	17919	8W	3000K	480lm	160mA	36°	Ø300x115x1500	-
DC48V IP 20  CRI>90 PF>0.9    								

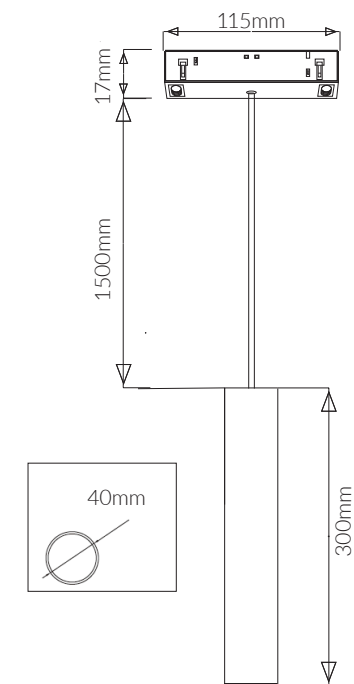

Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 8W / 12W
CCT: 2700K-6000K
Beam angle: 15° /24°
Finish: Sandy White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Nano	17367	15W	4000K	1200lm	625mA	36°	Ø300x174x1500	-

DC24V

IP20

CRI>90

PF>0.9

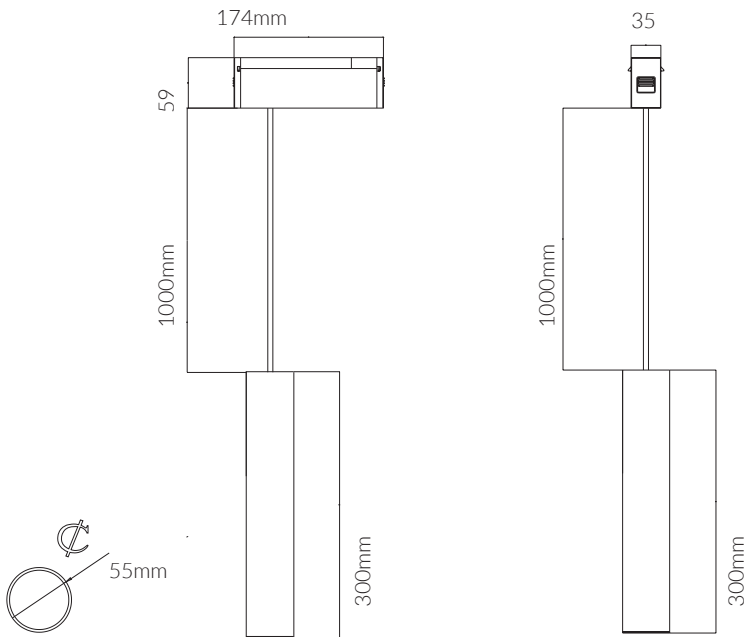

NANO
24V MAGNETIC PENDANT



DORADO

48V MAGNETIC PENDANT


SYV | MagneticTrack Lights

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:


CCT: 2700K-6000K
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

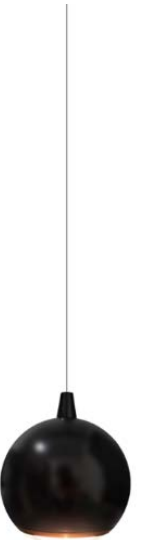

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Dorado	17390	5W	3000K	300lm	-	75°	Ø300x80x1500	-

DC48V IP 20  CRI>90 PF>0.9

 SDCM <3  Class III  UGR<19 

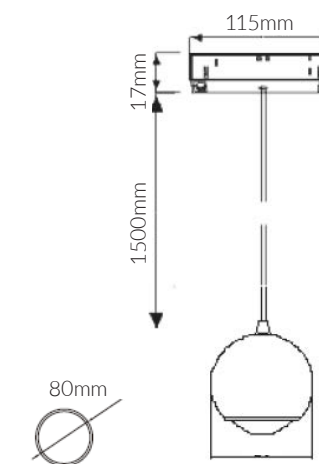



CASTEL

48V MAGNETIC PENDANT

SYV | MagneticTrack Lights

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: High-grade Aluminium
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:


CCT: 2700K-6000K
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth







	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Castel	17918	6W	3000K	390lm	-	220°	Ø115x130x1500	-


DC48V IP 20  CRI>90 PF>0.9

 SDCM <3  Class III  UGR<19 

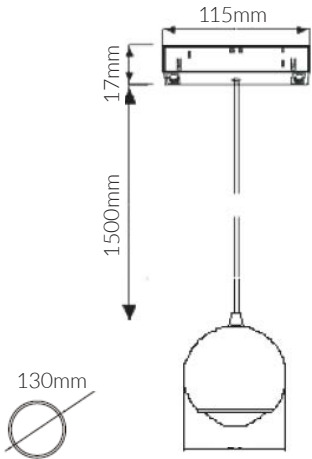

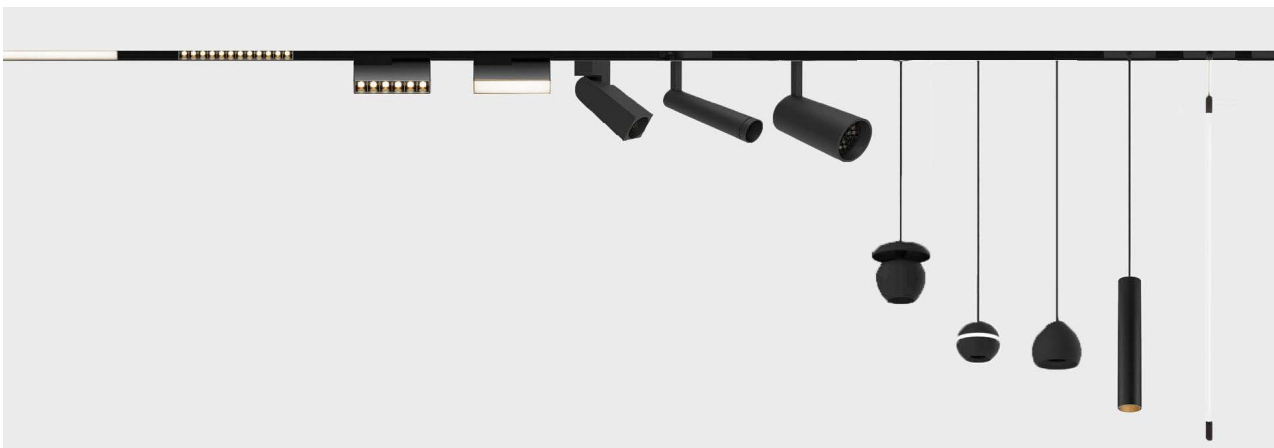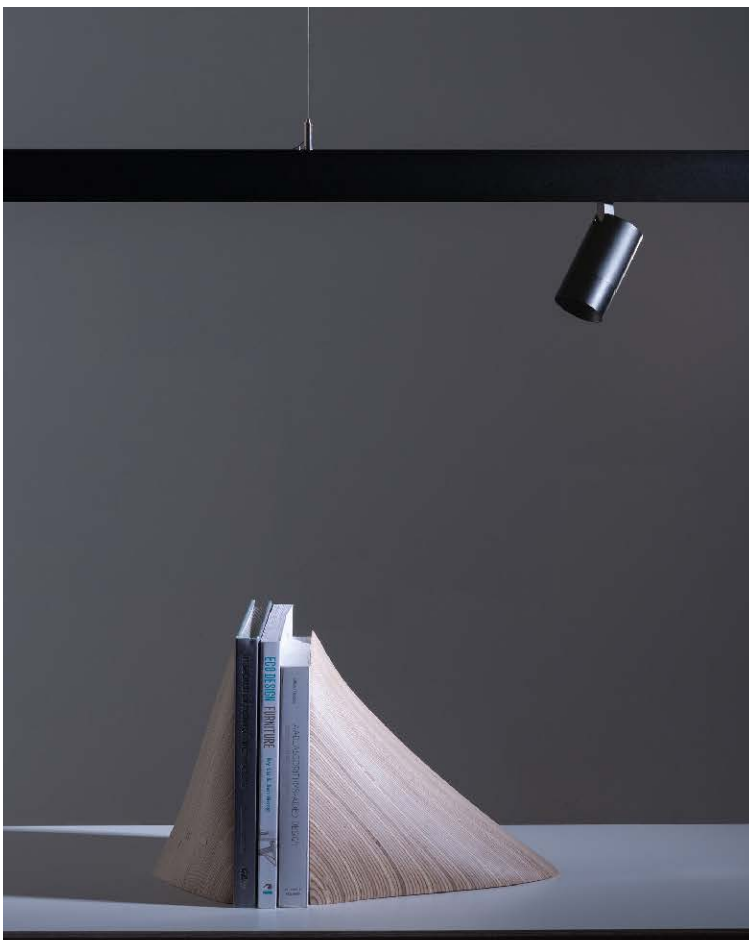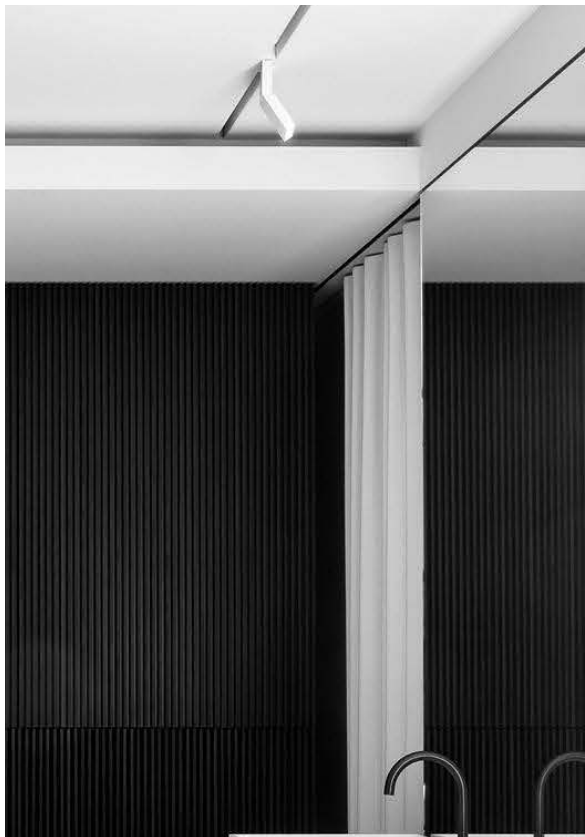

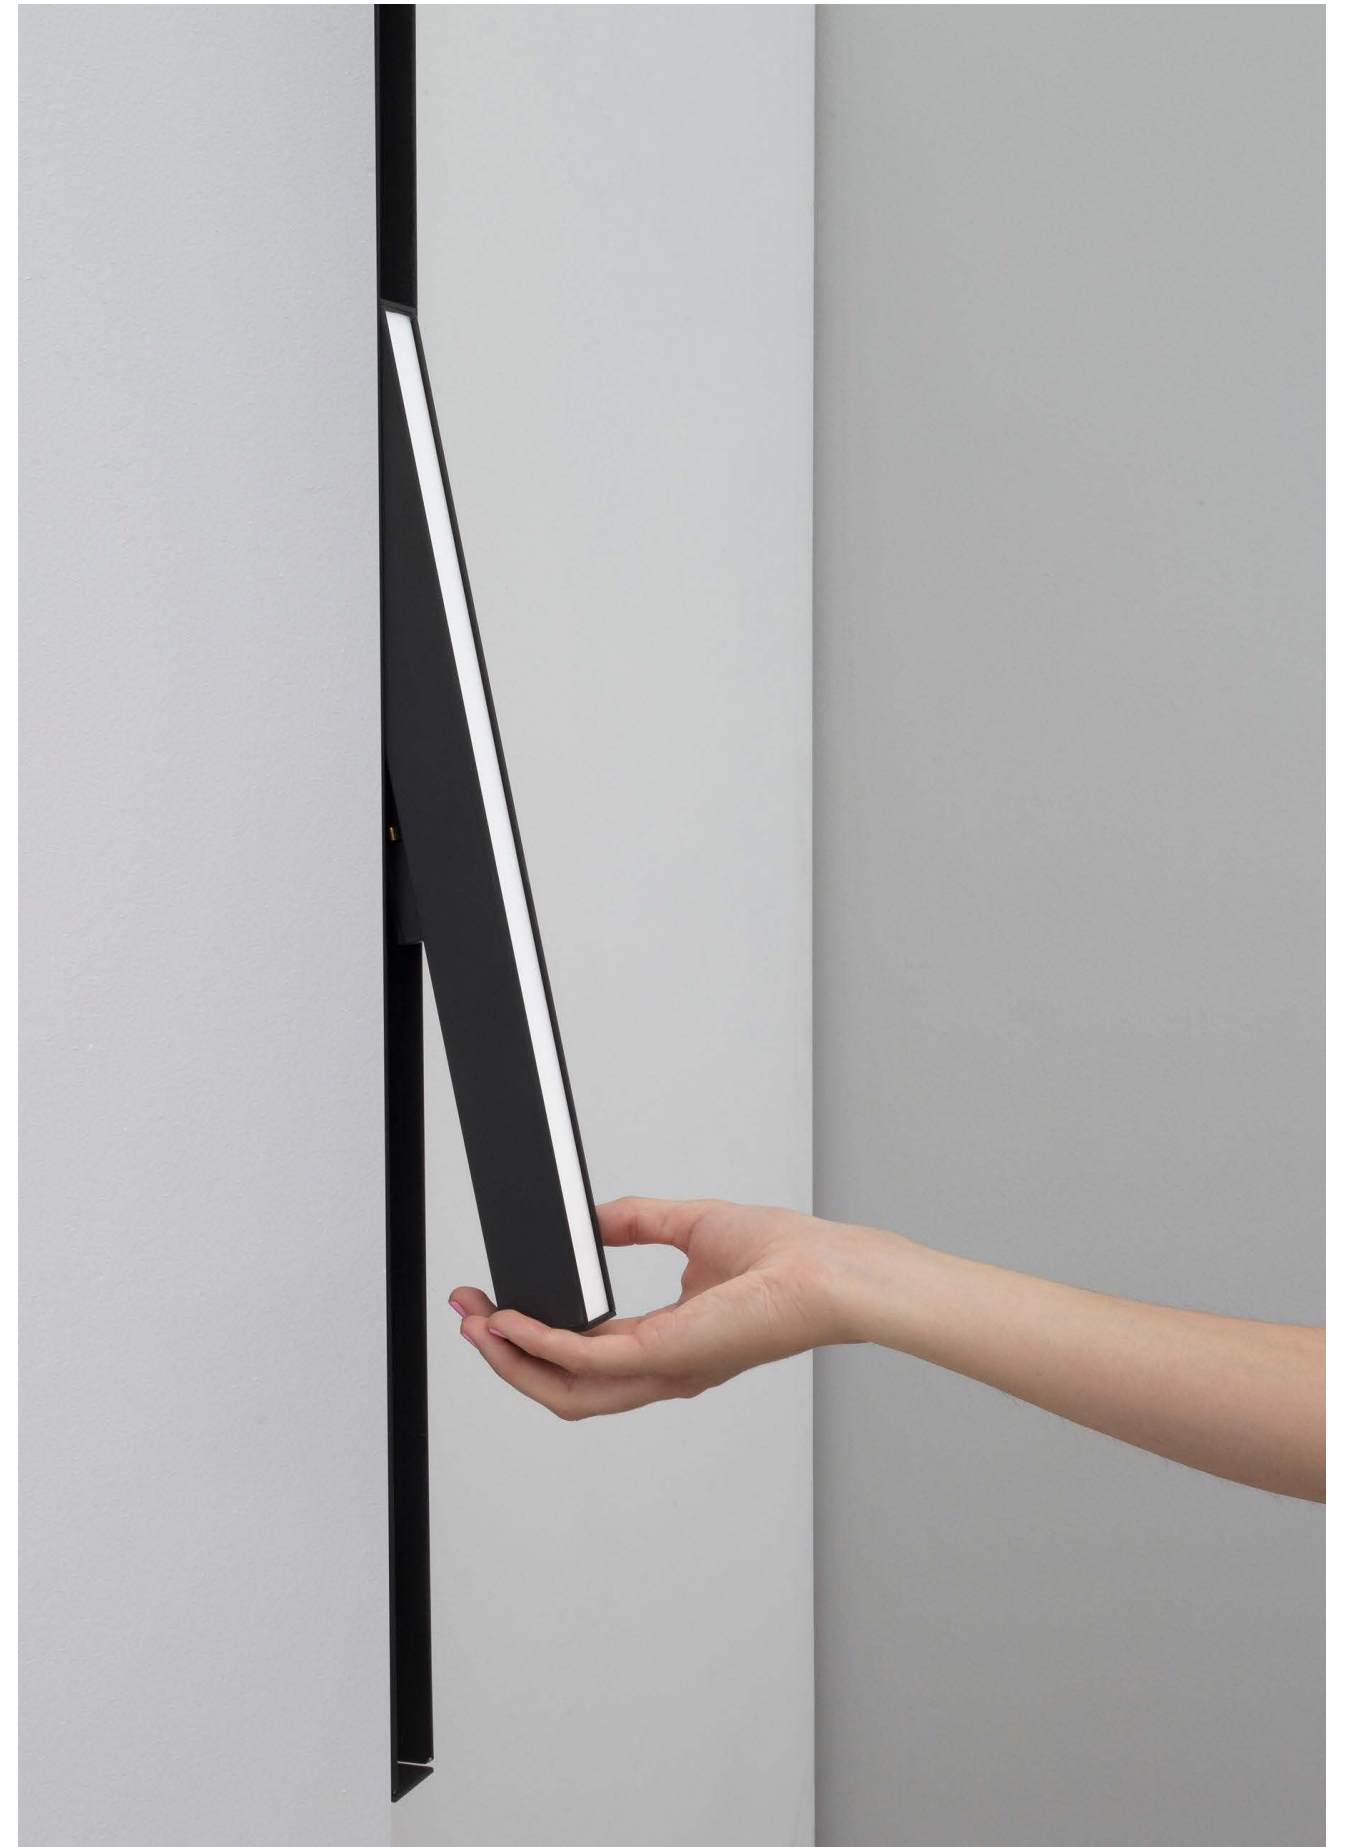

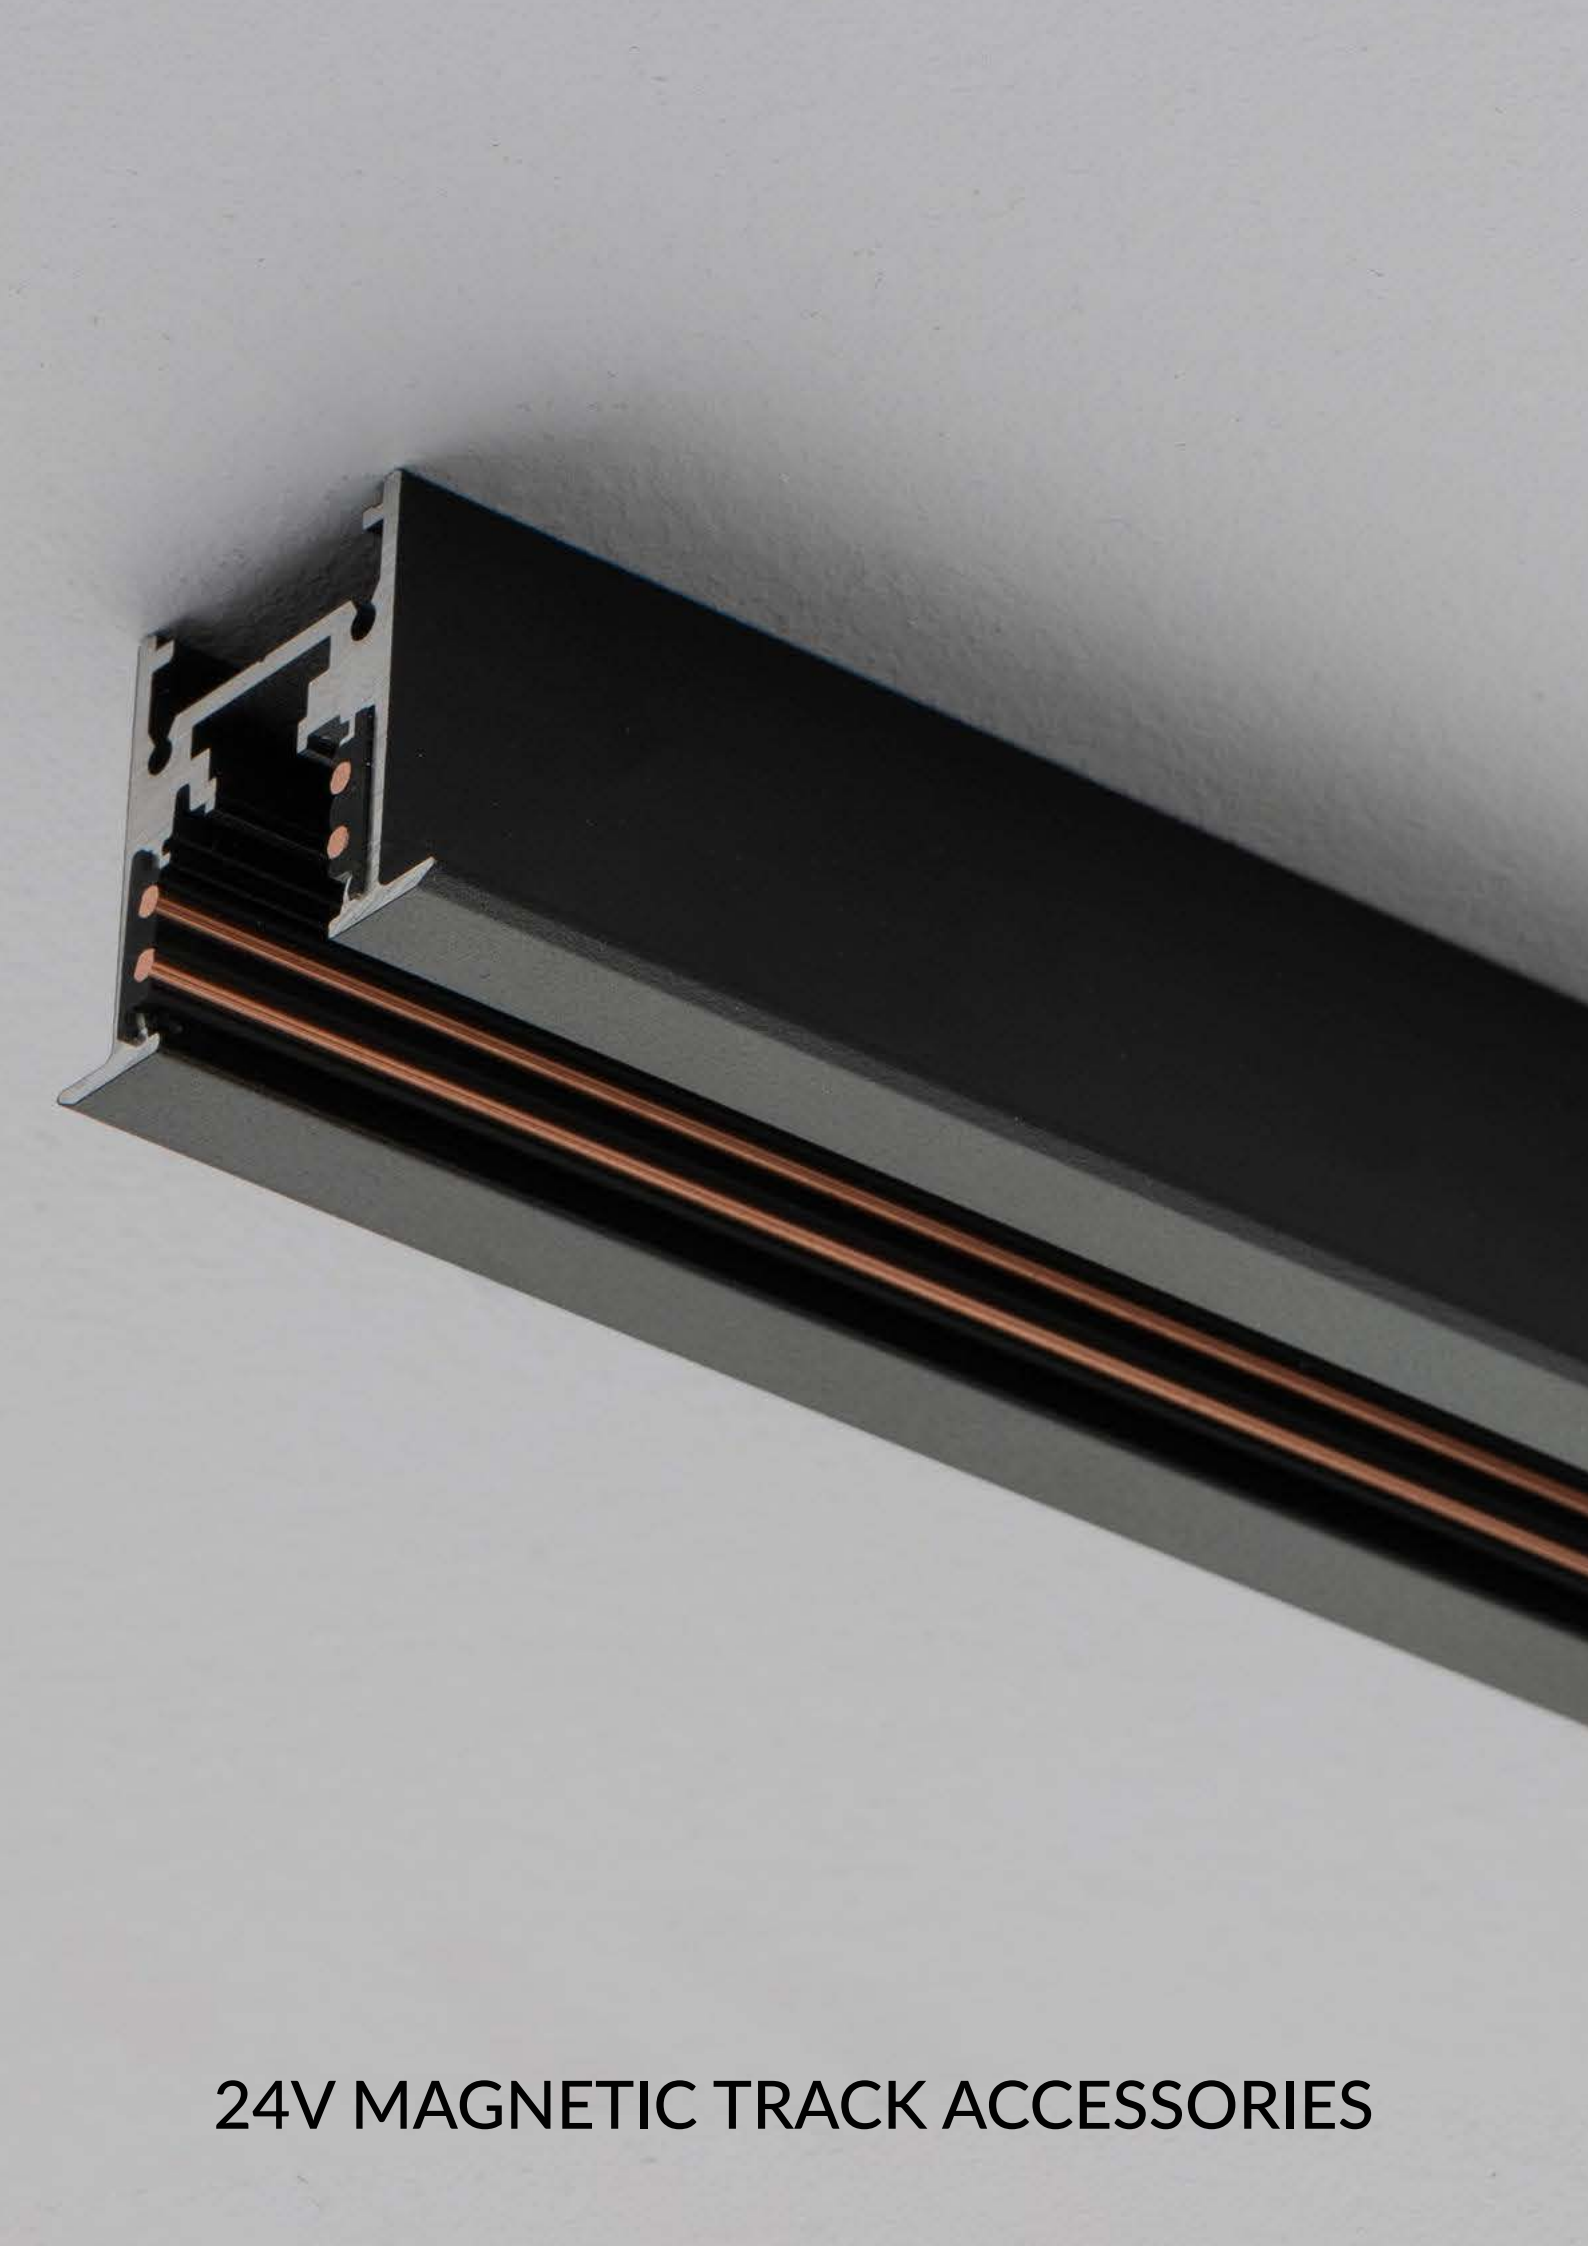

24V MAGNETIC TRACK ACCESSORIES

SKU		
	17760	Surface mount track, 48VDC, L=1000mm Black finish
	17219	Recessed track with trim 48VDC, L=1000mm Cutout = L1010 x W35 x H60 mm Black finish
	15689	End cap, black
	17218	Power feeder for dimmable track, black
	17217	Straight power joiner, black
	17220	L Power joiner , black
	15685	Metal connector kits, black
	17978	L Horizontal track connector without trim black
	17979	L Vertical track connector without trim black
	17214	Surface mount kits, black
	15312	200W Power supply black



SLIM MAGNETIC TRACK SERIES - DC24V



SYV | MagneticTrack Lights

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +45°C
Material: Die cast aluminum
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:


CCT: 4000K-6000K
Finish: Gold
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth



SKU 18986

SKU 18987

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Alicia	18987	7W	3000K	490lm	290mA	36°	Ø40x230	-
Justina	18986	7W	3000K	490lm	290mA	-	Ø80	-
DC24V	IP 20	CRI>90	PF>0.9				SDCM <3	Class III
							UGR<13	CE

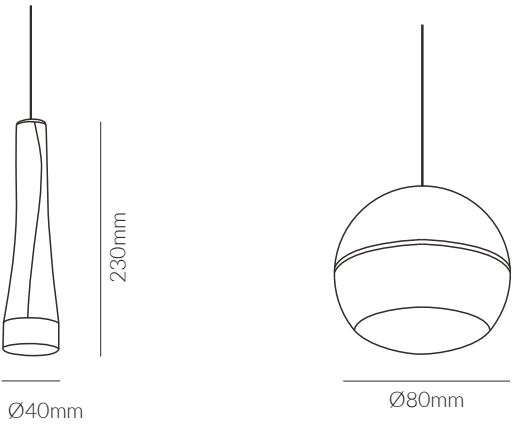



LORENA
24V MAGNETIC PENDANT

SYV | MagneticTrack Lights

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +45°C
Material: Die cast aluminum
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality




Product Options:

CCT: 4000K, 6000K
Beam Angle: 25°
Finish: White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Lorena	18985	5W	3000K	350lm	200mA	45°	Ø30x300	-

DC24V IP 20  CRI>90 PF>0.9

 SDCM <3  Class III  UGR<19 

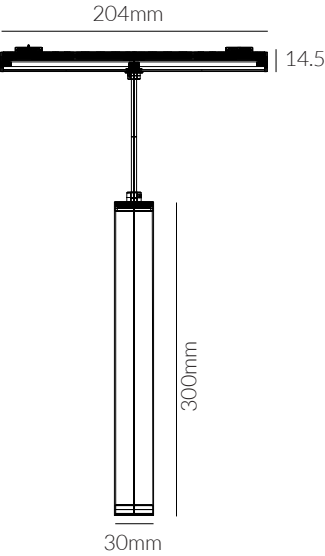

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +45°C
Material: Die cast aluminum
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 12W / 24W / 30W
CCT: 3000K - 6000K
Finish: White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth





	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Polo	18975	6W	3000K	420lm	250mA	30°	204 x 20 x 14.5	-
	18976	18W	3000K	1260lm	750mA	30°	604 x 20 x 14.5	-
	18980	6W	3000K	420lm	250mA	30°	204 x 46 x 14.5	-
	18981	18W	3000K	1260lm	250mA	30°	604 x 46 x 14.5	-

DC24V

IP
20

CRI>90

PF>0.9

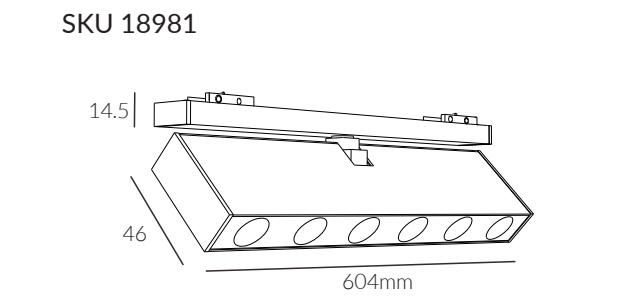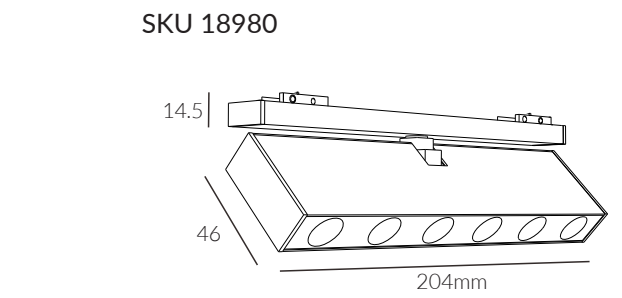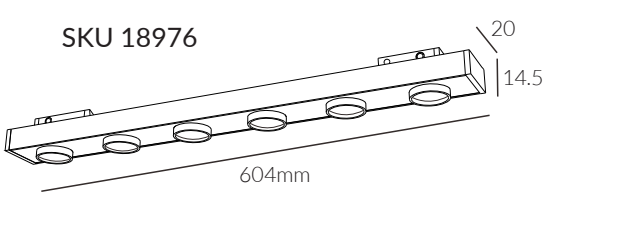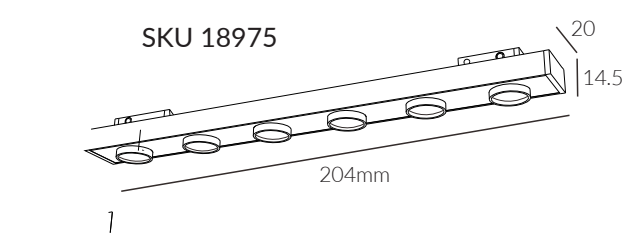

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +45°C
Material: Die cast aluminum
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 24W / 30W
CCT: 3000K-6000K
Finish: White
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth





	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Bello	18977	12W	3000K	960lm	500mA	100°	404 x 20 x 9	-
	18978	18W	3000K	1440lm	250mA	100°	604 x 20 x 9	-
	18982	6W	3000K	480lm	250mA	100°	404 x 46 x 20	-
	18983	18W	3000K	1440lm	750mA	30°	604 x 46 x 20	-

DC24V

IP
20

CRI>90

PF>0.9

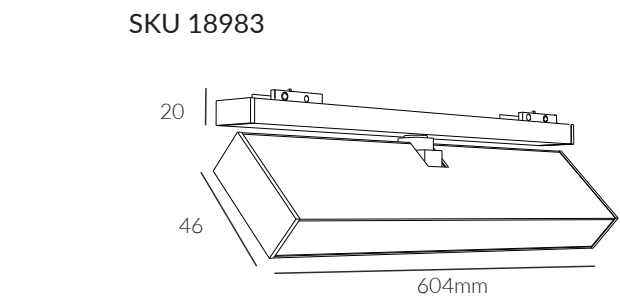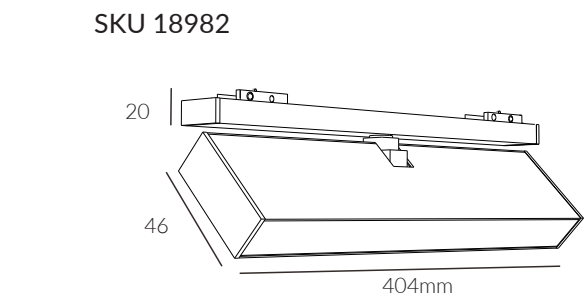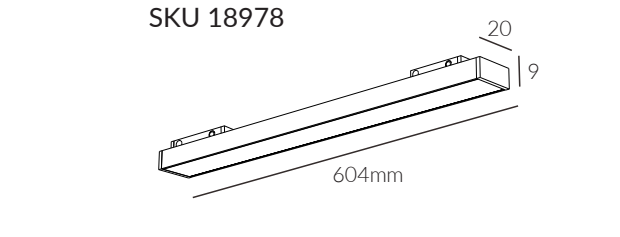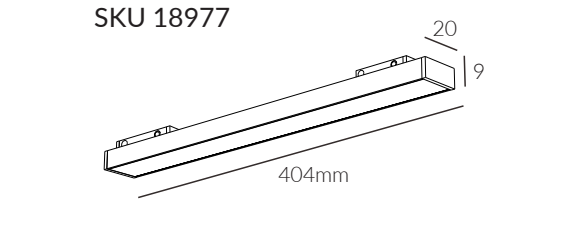



Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +45°C
Material: Die cast aluminum
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 5W / 9W / 12W
CCT: 4000K, 6000K
Beam angle: 15°/24°
Finish: White / Silver / Gold
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Elio	18979	7W	3000K	490lm	290mA	36°	Ø35x65	-
Olga	18984	7W	3000K	490lm	290mA	36°	Ø60x90	-
DC24V IP 20  CRI>90 PF>0.9    								

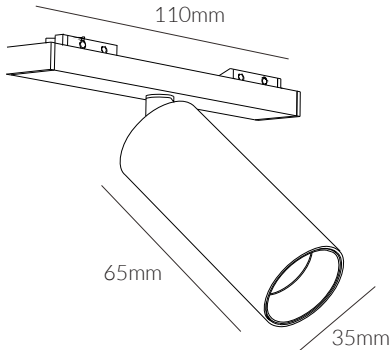

Product Specifications:


Lamp Type: LED
Operating Temp.: -20°C ~ +45°C
Material: PVC+copper wire
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

CCT: 4000K, 6000K
Control: Switchable/TRIAC/0-10V/Wi-Fi/Bluetooth



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Betita	19041	6W/mtr	3000K	420lm	-	120°	5Mtr/Roll, W: 5mm	-
DC24V IP 20  CRI>90 PF>0.9   								





PANEL LIGHTS



LUKE PRO

Screwless Design, Patent No: ZL202122707173.5

SYV | Recessed Panel lights

Product Specifications:

Lamp Type: OSRAM LED
Driver: PHILIPS
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 70,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 26W / 30W / 36W
Installation: Surface Mount / Suspended
Control: Switchable/TRIAC/0-10V/DALI/1-10V
Optional: Emergency Backup Kit

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Luke Pro	19656	40W	3000K/4000K/6000K	4400lm, 4600lm, 4800lm	1000mA	120°	595x595x28	-

AC220-240V

IP 54

120°


CRI>90

SDCM <3

Class II

UGR<22



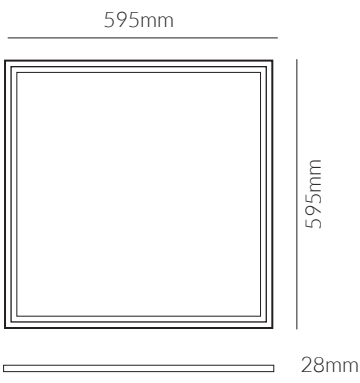



Product Specifications:

Lamp Type: SAMSUNG LED
SDCM: 5 MacAdam
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Diffuser: Opal PMMA
Finish: White
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality




Product Options:

Wattage: 26W / 30W / 36W
Installation: Surface Mount / Suspended
Control: Switchable/TRIAC/0-10V/1-10V
Optional: Emergency Backup Kit

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Rio - DALI	17822	40W	4000K	4000lm	1000mA	120°	Ø591x591	Ø575x575

AC220-240V IP 44  CRI>90

 SDCM <5  Class II  UGR<22 

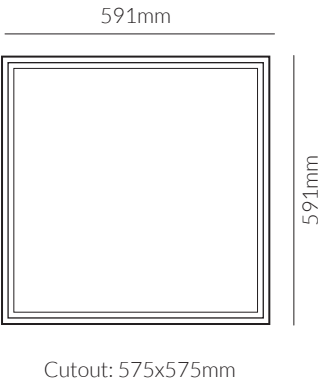

RIO

Product Specifications:

Lamp Type: EPISTAR LED
SDCM: 5 MacAdam
Operating Temp.: -20°C ~ +40°C
Material: Plastic frame + PC
Finish: White
Lifespan: 70,000 Hrs
Warranty: 7 Years
Applications: Commercial, Hospital, Clinic



Product Options:

Wattage: 28W / 45W / 60W
CCT: 3000K - 6000K
Control: Switchable/TRIAC/0-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Plaza - Troffer	15234	35W	4000K	3,850lm	850mA	120°	Ø595x595x76	-
	15367	35W	6000K	4,025lm	850mA	120°	Ø595x595x76	-
	15447	50W	6000K	5,500lm	1050mA	120°	Ø1195x595x105	-

AC220-240V

IP40

120°


CRI>90

SDCM <5

Class II

UGR<24



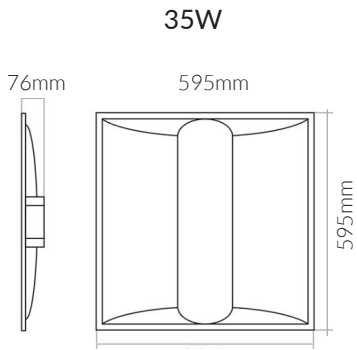



LARGO

Antibacterial Edge-lit Panel Light

SYV | Recessed Panel lights

Product Specifications:

Lamp Type: SAMSUNG LED
Driver: BOKE
Operating Temp.: -40°C ~ +60°C
Material: Aluminum + PMMA
Finish: White
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 18W / 48W
CCT: 3000K - 6500K
Control: Switchable/TRIAC/0-10V/1-10V/DALI
Optional: Emergency Backup Kit

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Largo	16593	36W	4000K	3,600lm	166mA	120°	595x595x10	-

AC220-240V

IP 65

120°


CRI>90

SDCM <3

Class II

UGR<19



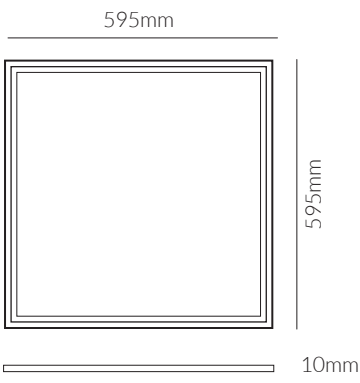



Product Specifications:

Lamp Type: SAMSUNG LED
SDCM: 3 MacAdam
Operating Temp.: -20°C ~ +40°C
Material: Aluminum Body
Finish: White
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Commercial, Hospital, Clinic



Product Options:

CCT: 3000K - 6000K
Control: Switchable/TRIAC/0-10V/DALI/1-10V
Accessories: Spring Fastener/Ceiling mounting frame/Metal suspending wire

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Erlich	16168	40W	3000K	3,400lm	176mA	120°	Ø595x595	-
	14466	40W	4000K	3,600lm	176mA	120°	Ø595x595	-
	14291	40W	6000K	4,400lm	176mA	120°	Ø1195x595	-

AC220-240V

IP 44

120°


CRI>80

SDCM <3

Class II


UGR<24





Product Specifications:

Lamp Type: SAMSUNG LED
SDCM: 5 MacAdam
Operating Temp.: -20°C ~ +40°C
Material: PMMA + LGP
Finish: White
Lifespan: 60,000 Hrs
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

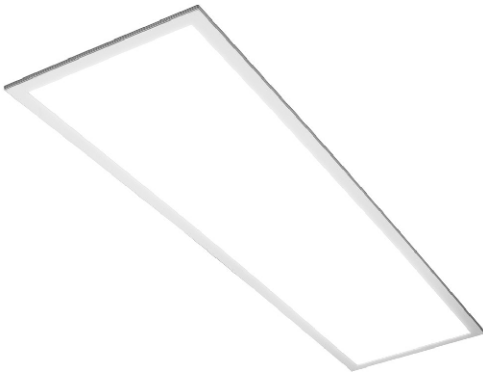

Product Options:

Wattage: 12W
CCT: 3000K - 6000K
Control: Switchable/TRIAC/0-10V/1-10V/DALI
Optional: Emergency Backup Kit
Installation: Suspended

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Viga	16444	40W	3000K	3,600lm	183mA	120°	Ø595x595	-
	15569	40W	4000K	3,800lm	183mA	120°	Ø595x595	-
	15426	40W	6000K	4,000lm	183mA	120°	Ø1195x595	-

AC220-240V

IP 44

120°


CRI>80

SDCM <4

Class II

UGR<19




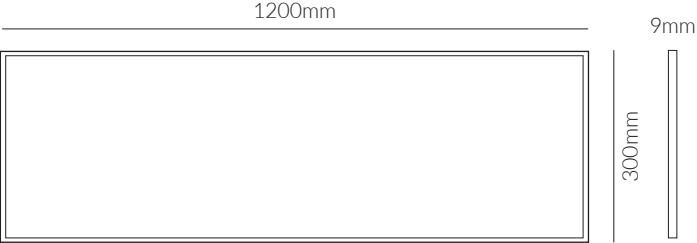





PENDANTS

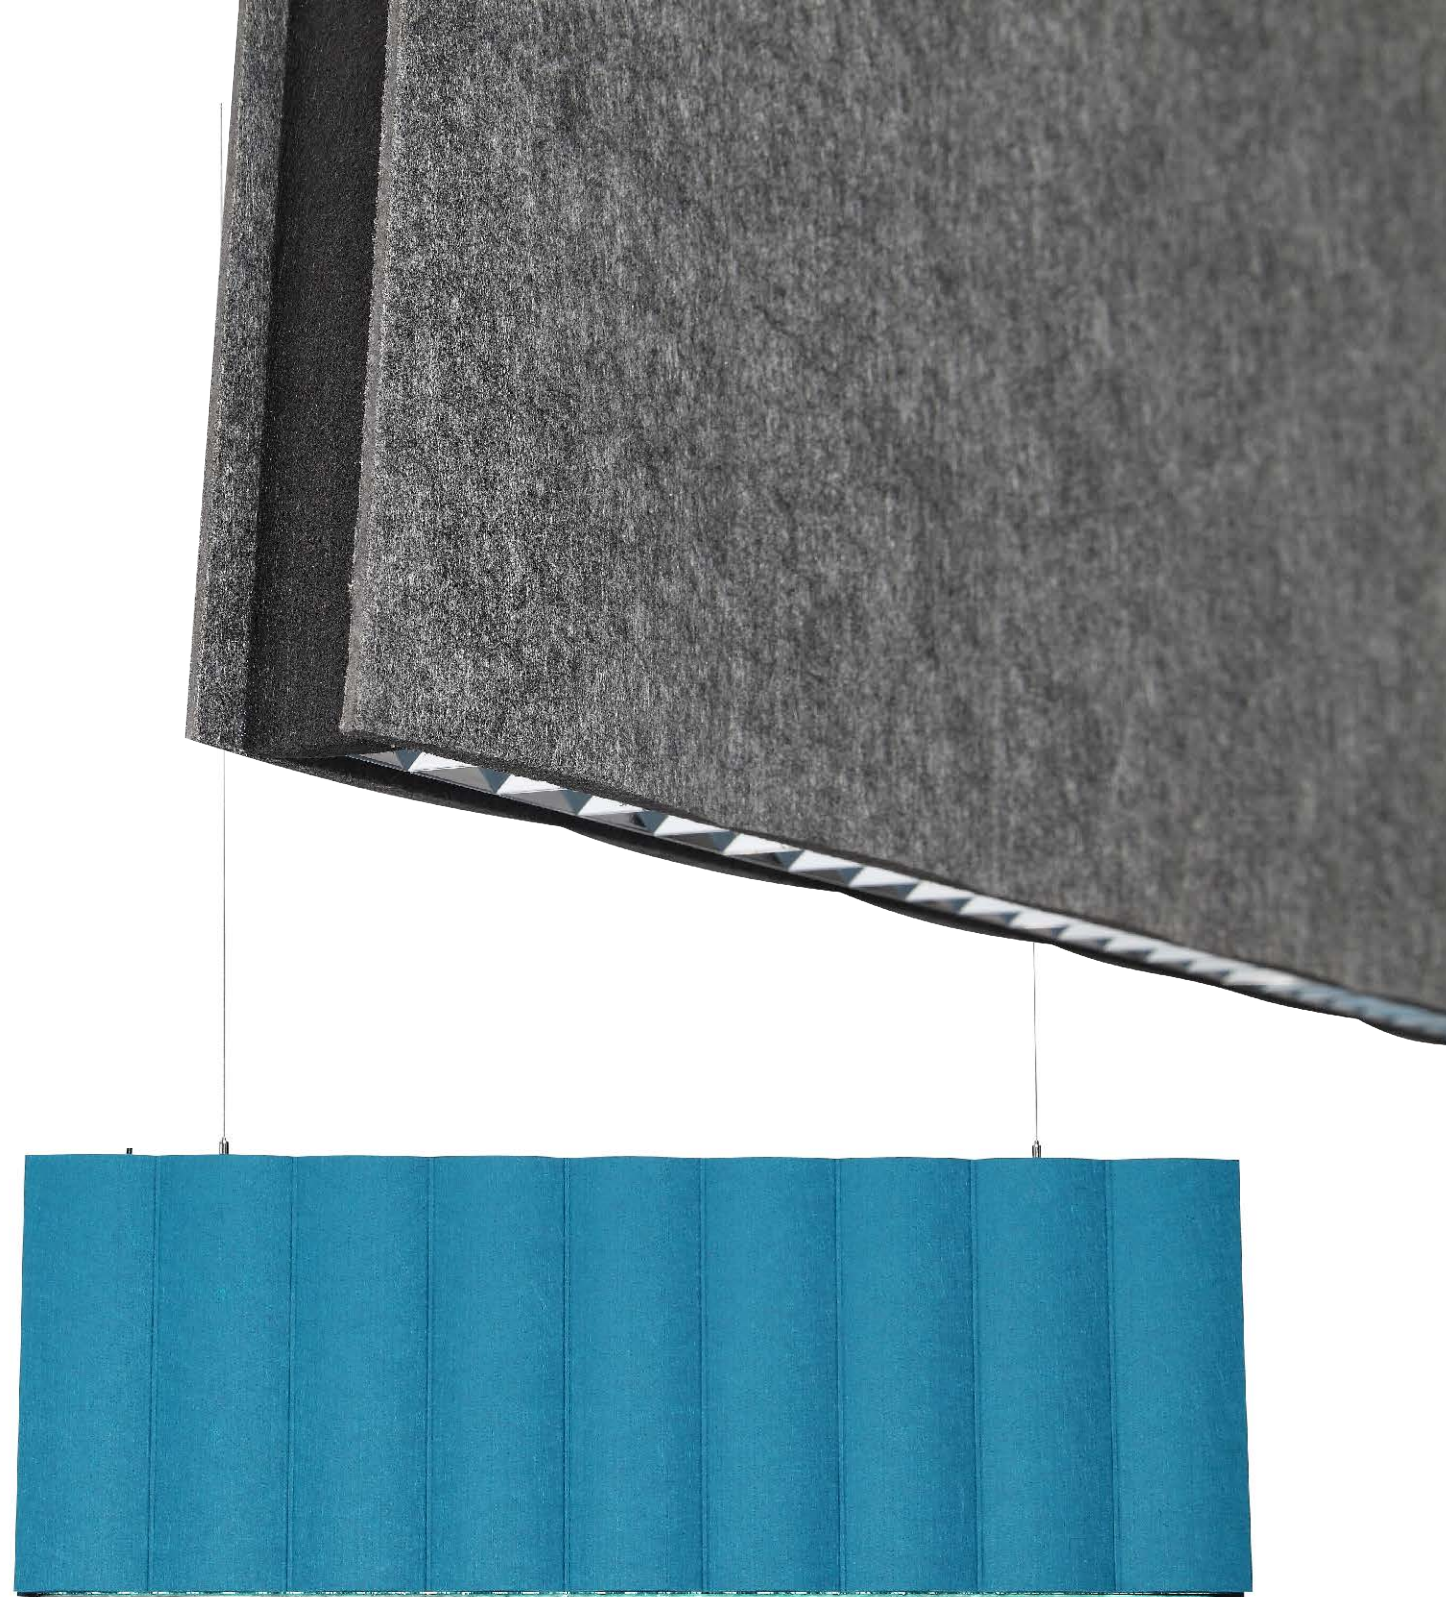

FLAUTA
ACOUSTIC LIGHTING



SOUND ABSORPTION FLAME RETARDANT


SYV | Pendant Lights

Product Specifications:

Lamp Type: OSRAM LED
Driver: OSRAM Driver
Operating Temp.: -20°C ~ +40°C
Material: Aluminium + Fabric
Finish: Grey & Blue
Lifespan: 70,000 Hours
Warranty: 7 Years
Applications: Residential, Office, Conference room, Study, Library

Product Options:

CCT: 3000K - 6000K
Finish: Yellow, Red, Green, Orange
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

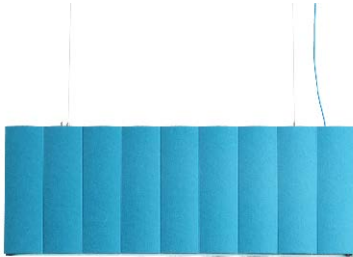

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Flauta	17121	30W	3000K	3,150lm	600mA	60°	L: 1100	Grey
	17599	30W	3000K	3,150lm	600mA	60°	L: 1100	Blue

AC220-240V

IP 20

60°

CRI>80


PF>0.9

SDCM <3

Class I

UGR<18



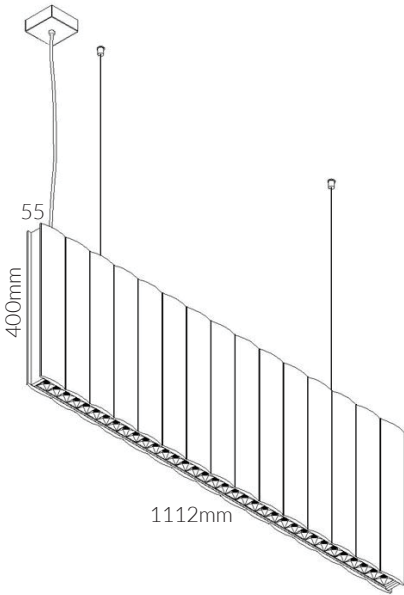



SONIDO

PENDANT

SYV | Pendant Lights

Product Specifications:


Lamp Type: OSRAM LED
Driver: OSRAM Driver
Operating Temp.: -20°C ~ +40°C
Material: Aluminium + Fabric
Finish: Grey Acoustic
Lifespan: 70,000 Hours
Warranty: 7 Years
Applications: Residential, Office, Conference room, Study, Library



Product Options:

CCT: 3000K - 6000K
Finish: Yellow, Red, Green, Orange
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

		SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish			
Sonido		17122	60W	4000K	6,120lm UP / 6,000lm DOWN	1200mA	140°UP / 70° DOWN	L: 1322	Grey			
AC220- 240V	IP 20		CRI>80	PF>0.9					 SDCM <3	 Class I	 UGR<18	

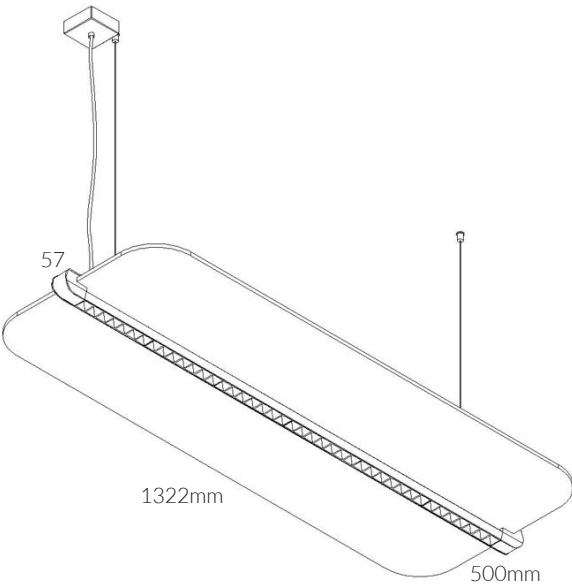


Product Specifications:

Lamp Type: OSRAM LED
Driver: OSRAM
Operating Temp.: -20°C ~ +40°C
Material: Aluminum + Fabric
Finish: Grey Acoustic
Lifespan: 70,000 Hours
Warranty: 7 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

CCT: 3000K - 6000K
Finish: Yellow, Red, Blue, Green, Orange
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

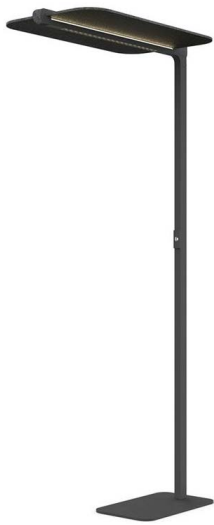

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Sonido	17123	60W	4000K	6,120lm UP / 6,000lm DOWN	1050mA	140° UP / 70° DOWN	-	-

AC220-240V

IP44

CRI>80


PF>0.9

SDCM <3

Class I

UGR<19

CE

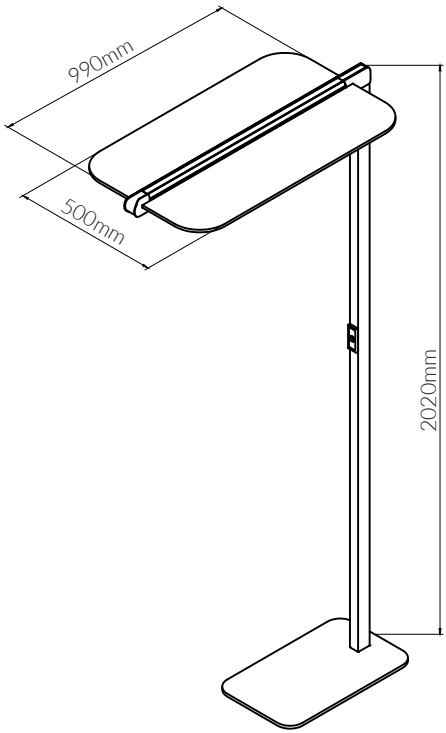

SONIDO

SOUND ABSORPTION/FLAME RETARDANT



Configuration

Pendant Recessed Surface

Customisation

Profile	Direct	Indirect	Light source plate	Prismatic diffuser	
Connection	+ Connector	T Connector	L Connector	Connector A	Connector B
Installation Accessories	Recessed Type 1	Recessed Type 2	Ceiling cap	Suspension wire	Suspension bracket



DIDO

SYV | Pendant Lights

Product Specifications:

Lamp Type: SAMSUNG LED
Driver: OSRAM
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Diffuser: PMMA
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:


Wattage: 15W / 30W
CCT: 3000K - 6000K
Finish: Grey / Yellow / Green / Orange
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Dido	14848	45W	4000K	4,050lm	1200mA	101°	L: 1135	White
	14849	45W	4000K	4,050lm	1200mA	101°	L: 1135	Black

AC220-240V IP 20  CRI>90 PF>0.9

 SDCM <1.3  Class I  UGR<19 





HONEYCOMB SERIES



PIGNATARO

Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Diffuser: PMMA
Lifespan: 100,000 Hours
Warranty: 10 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 30W / 45W / 60W
CCT: 3000K - 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Pignataro	14847	36W	4000K	2,592lm	900mA	73°	L: 1382	Matt Black
	(TRIAC Dimming) 16270	36W	3000K	2,520lm	900mA	73°	L: 1382	Matt Black
	18212	36W	4000K	2,592lm	900mA	73°	L: 1382	Grey Fabric
	17307	36W	4000K	2,592lm	900mA	73°	L: 1382	Matt White
	15401	60W	4000K	4,320lm	1400mA	73°	L: 2422	Matt White
	17475	60W	4000K	4,320lm	1400mA	73°	L: 2422	Matt Black

AC220-240V

IP 20

73°

CRI>80


PF>0.9

SDCM <1.3

Class I

UGR<19



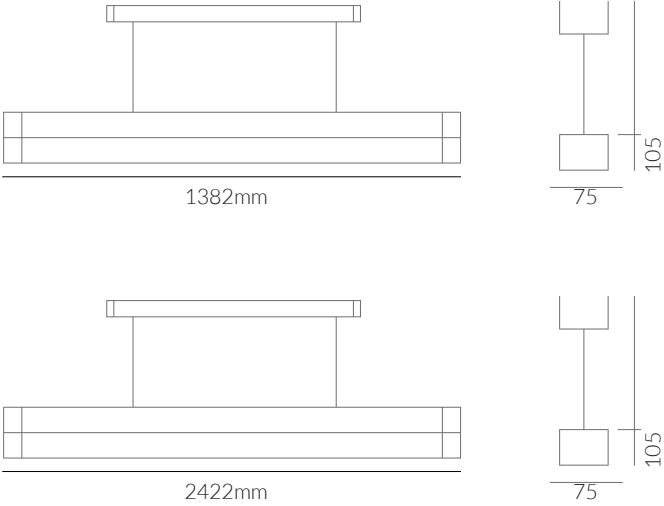

Product Specifications:

Lamp Type: SAMSUNG LED
Driver: LIFUD Driver
Operating Temp.: -20°C ~ +40°C
Material: Aluminium housing
Diffuser: PC
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 25W / 30W
CCT: 3000K - 6000K
Finish: Grey
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Eva	17292	60W	4000K	5,700lm	265mA	97.8°	L: 1196	Black
	17293	60W	4000K	5,700lm	265mA	97.8°	L: 1196	White

AC220-240V

IP 20

97.8°

CRI>83


PF>0.9

SDCM <3

Class I

UGR<20



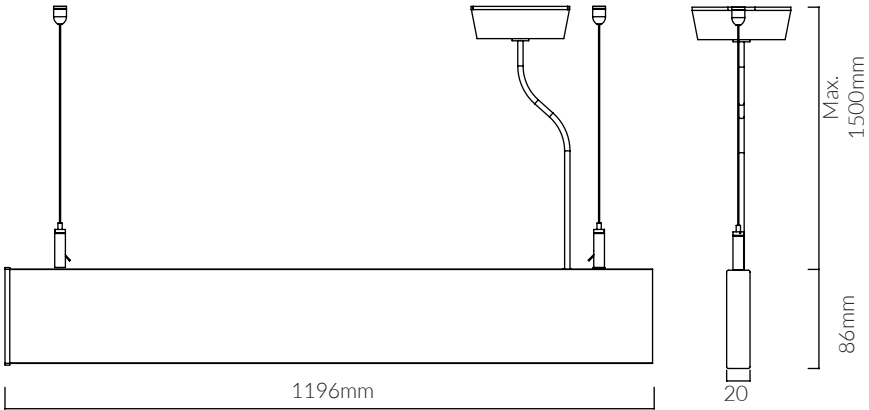

Product Specifications:

Lamp Type: SAMSUNG LED
Driver: LIFUD Driver
Operating Temp.: -20°C ~ +40°C
Material: Aluminium housing
Diffuser: PC
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 25W / 30W
CCT: 3000K - 6000K
Finish: Grey
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Inso	17296	60W	4000K	3,800lm	178mA	97.4°	L: 1194	White
	17295	60W	4000K	3,800lm	178mA	97.4°	L: 1194	Black

AC220-240V

IP 20

97.4°

CRI>83


PF>0.9

SDCM <3

Class I

UGR<22



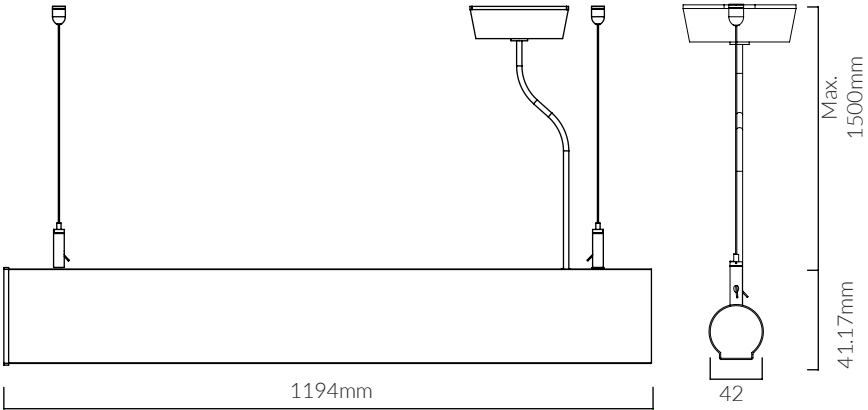



Product Specifications:

Lamp Type: SAMSUNG LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Aluminium housing
Diffuser: PC
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 25W / 30W
CCT: 3000K - 6000K
Finish: White / Grey
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Eleni	17291	40W	4000K	3,000lm	184mA	101°	L: 1194	Black

AC220-240V

IP 20

101°

CRI>83


PF>0.9

SDCM <3

Class I

UGR<19



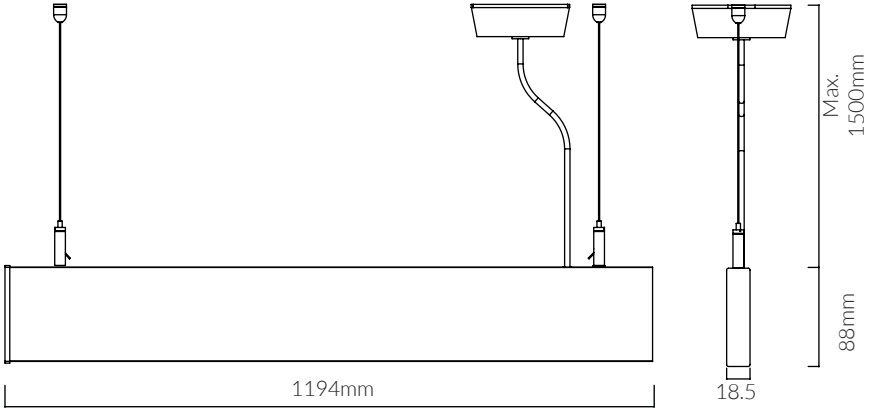

Product Specifications:

Lamp Type: SAMSUNG LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Aluminium housing
Diffuser: PC
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Residential, Office, Conference room, Study, Library

Product Options:

Wattage: 25W / 30W
CCT: 3000K - 6000K
Finish: Matt White / Grey
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Pedro	17294	40W	4000K	2,400lm	171mA	36°	L: 1512	Black

AC220-240V

IP 20

60°

CRI>83


PF>0.9

SDCM <3

Class I

UGR<17



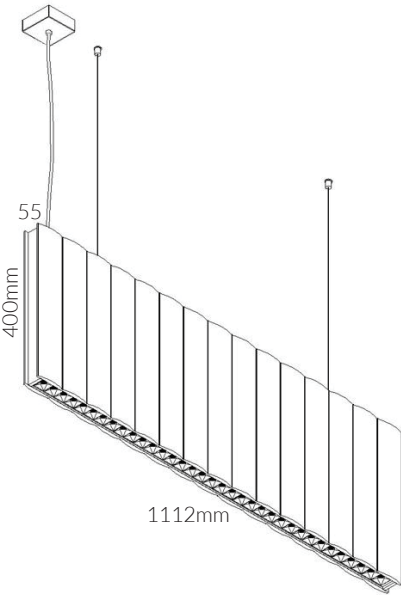



Product Specifications:

Lamp Type: SAMSUNG LED
Driver: OSRAM
Operating Temp.: -20°C ~ +40°C
Material: Aluminium housing
Diffuser: PMMA
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Residential, Office, Conference room, Study, Library



Product Options:

Wattage: 40W/50W/80W/100W/120W/200W
CCT: 3000K - 6000K
Finish: Black
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Cima	15184	60W	4000K	6,600lm	1400mA	120°	D: 900	White

AC220-240V

IP 42

120°

CRI>83


PF>0.9

SDCM <3

Class I

UGR<21



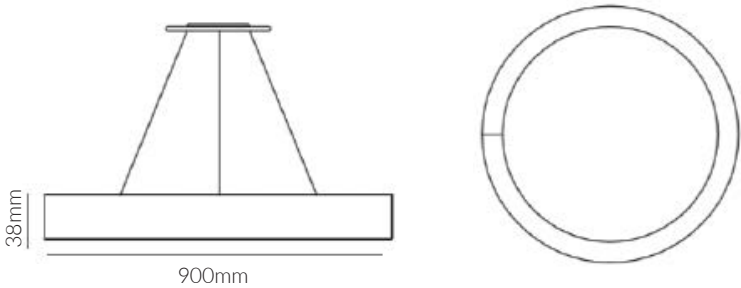

CIMA





LIYAMADA

SYV | Pendant Lights

Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Diffuser: PMMA
Finish: Matt White
Lifespan: 60,000 Hours
Warranty: 60 Years
Applications: Commercial, Retail, Residential, Hospitality







Product Options:


CCT: 3000K - 6000K
Finish: Matt Black
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Installation: Surface Mounted

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Liyamada	15624	30W	4000K	3,150lm	750mA	120°	D: 450	Matt White
	15625	45W	4000K	4,725lm	1125mA	120°	D: 600	Matt White
	14826	60W	4000K	6,300lm	1500mA	120°	D: 720	Matt White
	15626	72W	4000K	7,560lm	1875mA	120°	D: 700	Matt White
	15627	90W	4000K	9,450lm	2250mA	120°	D: 1200	Matt White

AC220-240V IP 42  CRI>80 PF>0.9

 SDCM <3  Class II  UGR<19 



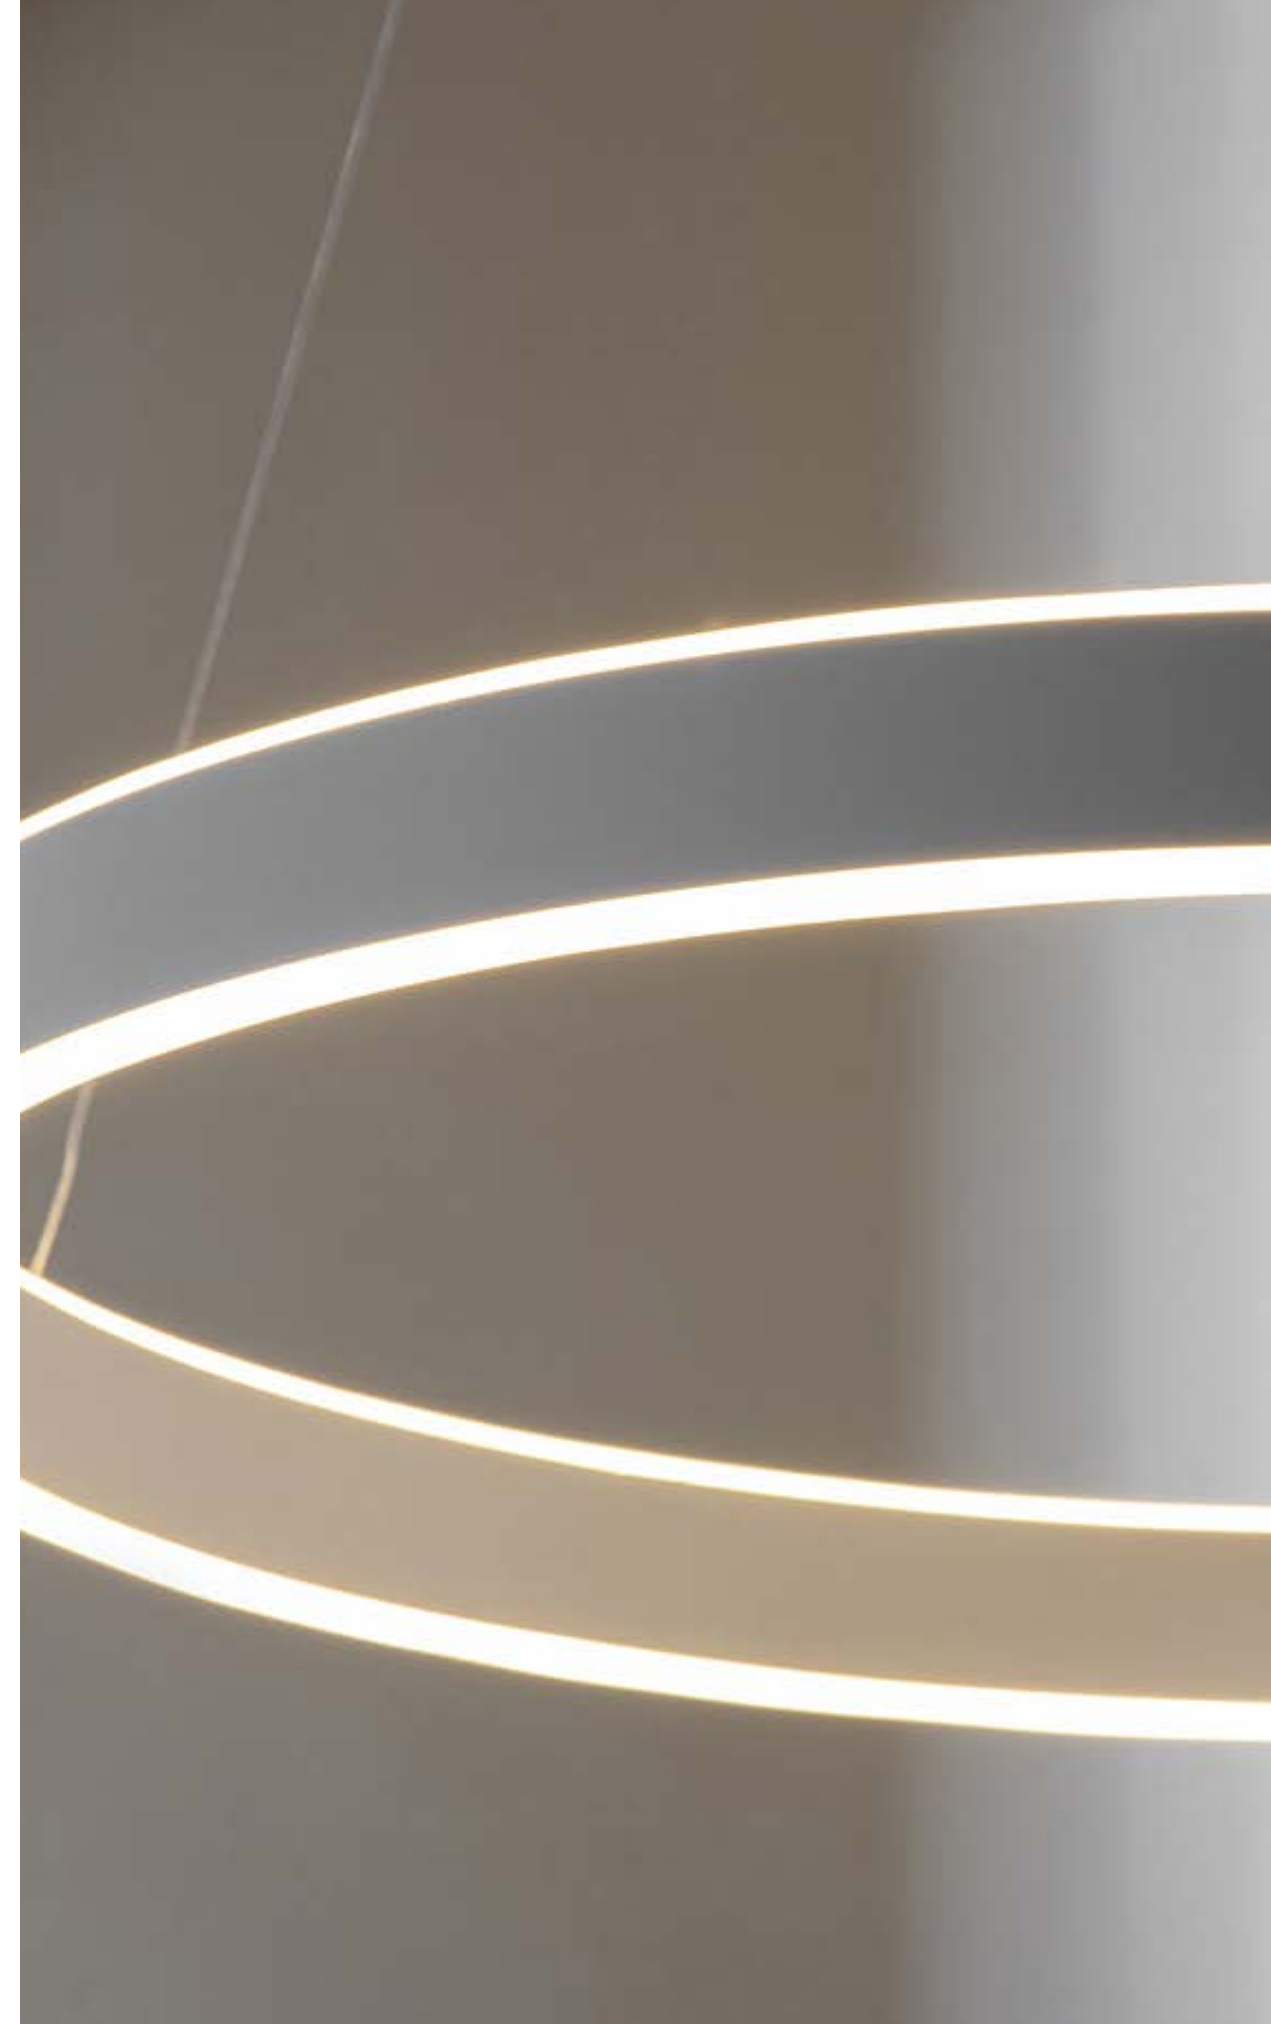

Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Diffuser: PMMA
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

CCT: 3000K - 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Lira	16572	40W	3000K	2,800lm	-	-	Ø800	Matt White
	15653	40W	4000K	3,000lm	-	-	Ø800	Matt White
	(UP & DOWN)17448	40W	3000K	2,800lm	-	-	Ø400	Matt White
	(UP & DOWN)17440	80W	3000K	6,000lm	-	-	Ø800	Matt White
	(UP & DOWN)15654	80W	4000K	6,000lm	-	-	Ø800	Matt White
	(UP & DOWN)17441	100W	3000K	7,500lm	-	-	Ø1200	Matt White

AC220-240V IP 20






CRI>80

PF>0.9



Class II



Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

CCT: 3000K - 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Giotto	16567	30W	3000K	2,850lm	-	-	Ø600	White
	16504	30W	4000K	2,940lm	-	-	Ø600	White

AC220-240V

IP 20




CRI>80

PF>0.9



Class II

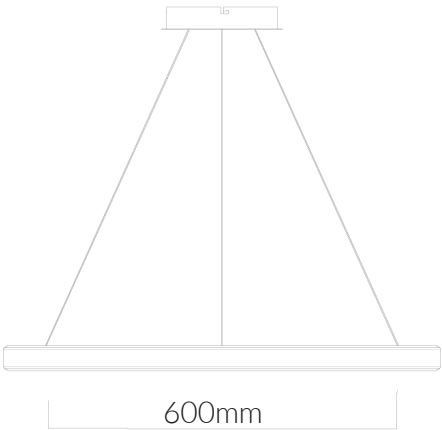



Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminium
Finish: Titanium
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 7W
CCT: 3000K - 6000K
Beam Angle: 15° / 24°
Finish: White/Black/Gold/Silver
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Latour	14940	5W	3000K	200lm	160mA	36°	Ø40x600	Titanium

AC220-240V

IP44

36°

CRI>90


PF>0.9

SDCM <3

Class II

UGR<10





Product Specifications:

Lamp Type: SAMSUNG LED
Driver: OSRAM
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Diffuser: PMMA
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 15W / 30W
CCT: 3000K - 6000K
Finish: Grey / Yellow / Green / Orange
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Gordon	15139	7W	3000K	420lm	160mA	36°	D: 450	White
	14942	7W	3000K	420lm	160mA	15°	D: 600	Titanium
	17562	7W	4000K	455lm	160mA	15°	D: 720	Titanium
	14941	7W	3000K	420lm	160mA	15°	D: 700	Titanium

AC220-240V

IP44

36° | 15°

CRI>90



PF>0.9

SDCM <3

Class II

UGR<19







SYV | Pendant Lights

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Die cast Aluminium+Lens
Finish: Black & WHite
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Residential, Office, Conference room, Study, Library

Product Options:

CCT: 4000K, 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC




SKU 19914

SKU 19913

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Pixo	19913	7W	3000K	525lm	150mA	18°	Ø67 1.5M Cable	White
	19914	7W	3000K	525lm	150mA	18°	Ø67 1.5M Cable	Black

AC220-240V IP 44 18° CRI>90 PF>0.9

SDCM <3 Class II UGR<13 CE

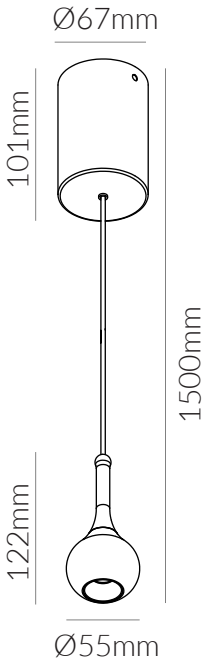

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Die cast Aluminium+Lens
Finish: Black & White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Residential, Office, Conference room, Study, Library

Product Options:

CCT: 4000K, 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Ramona	19180	5W	3000K	350lm	600mA	15°~50° (Adjustable)	Ø32x240 1.5M Cable	White
	19181	5W	3000K	350lm	600mA	15°~50° (Adjustable)	Ø32x240 1.5M Cable	Black

AC220-240V

IP44

15°~50°

CRI>90


PF>0.9

SDCM <3

Class II

UGR<13



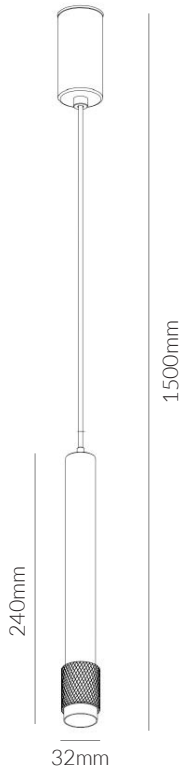



AMARA

SYV | Pendant Lights

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Die cast Aluminium+PC
Finish: White+Black Reflector Cup
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Residential, Office, Conference room, Study, Library

Product Options:

Wattage: 12W
Beam Angle: 36°
Finish: Black
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Amara	19063	24W	3000K/4000K/ 6000K	80-90lm/W	600mA	24°	Ø150x130 1.5M Cable	White+Black

AC220-240V

IP 44

24°

CRI>90


PF>0.5

SDCM <3

Class II

UGR<19



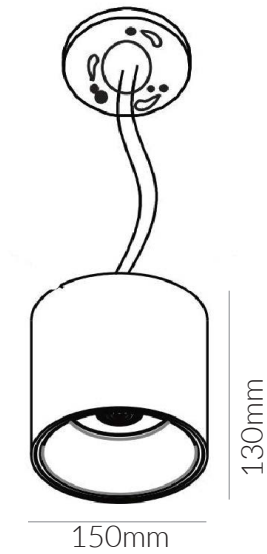

Cable Length = 1.5mtr




FRENTE


LINEAR LIGHTING SYSTEM (5 WIRES)

OPTICS


FD-120°
Extremely wide




WD-90°
wide



NR-60°
narrow



SP-30°
extremely narrow




LS / RS
asymmetrical



DS
Double asymmetrical



FF
Diffuser



ACCESSORIES

Power Feed



Feed In Box



Feed In Connector

Mounting Kit



Suspension Chain



Suspension Rod



Suspension Cord



Surface Mounted



Mounting Clip

Node Connector



L Node Connector



T Node Connector



X Node Connector

Closure



End Cap



Blank Cover

Product Specifications:

Lamp Type: SAMSUNG LED
Driver: TRIDONIC
Operating Temp.: -25°C ~ +60°C
Material: Steel Body
Finish: Black & Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Supermarkets, Warehouses, Industry, etc.



Product Options:

Wattage: 40W / 45W / 55W / 60W / 65W / 70W
CCT: 3000K - 6000K
Beam Angle: 30°/60°/90°/120°/Symmetric/Double Symmetric
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Wire: 5 / 8 / 12 wires trunking rail
Optional: Daylight sensor, motion sensor

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Frente	15150	35W	4000K	5,600lm	430mA	60°	L: 1500	Black
	15160	50W	6000K	8,000lm	620mA	90°	L: 1500	Grey

AC220-240V

IP20



CRI>80


PF>0.9

SDCM <3

Class I

UGR <22



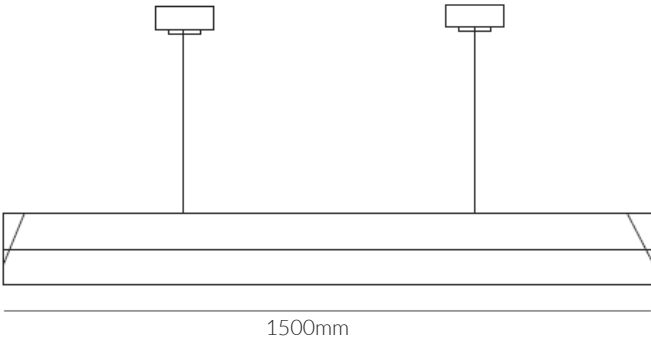



LINEAR

EXTRUSION




ZOE

LINEAR LIGHT

SYV | Continous Linear Light

Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +45°C
Material: Aluminium Body
Finish: Customised
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Residential, Commercial, Hospitality etc.

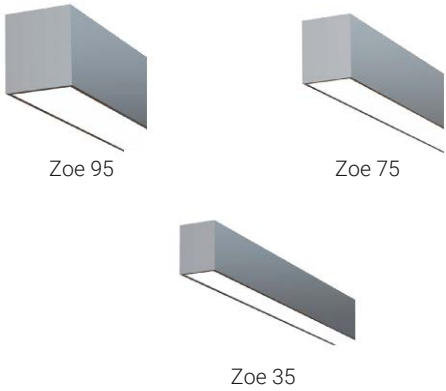




Product Options:

Finish: Silver Satin, White Satin, Black, Customised
Control: Switchable, 1-10V, DALI, TRIAC, RGBW

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Zoe 35	17484	5 to 50W/m	3000K - 6000K	105 lm/W	-	120°	W:35 x H:35	-
	17485	5 to 50W/m	3000K - 6000K	105 lm/W	-	120°	W:50 x H:35	-
	17486	5 to 50W/m	3000K - 6000K	105 lm/W	-	120°	W:80 x H:35	-
Zoe 75	17487	5 to 50W/m	3000K - 6000K	105 lm/W	-	120°	W:35 x H:75	-
	17488	5 to 50W/m	3000K - 6000K	105 lm/W	-	120°	W:50 x H:75	-
	17489	5 to 50W/m	3000K - 6000K	105 lm/W	-	120°	W:75 x H:75	-
Zoe 95	17490	5 to 50W/m	3000K - 6000K	105 lm/W	-	120°	W:50 x H:95	-
	17491	5 to 50W/m	3000K - 6000K	105 lm/W	-	120°	W:65 x H:95	-
	17492	5 to 50W/m	3000K - 6000K	105 lm/W	-	120°	W:75 x H:95	-

AC220-240V IP 20  120° CRI>90 PF>0.9



 SDCM <3  Class II  UGR<19 

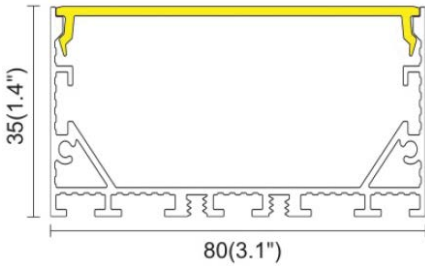


(Length can be Customizable and Configurable)

Design the interior to suit your needs

The Zoe 35 Range now comes in **3 size alternatives** to suit all architectural spaces. High-ceilings, intricate architectural details, corridors, corners; the Zoe 35 Range can fit everywhere and be mounted to accommodate your installation needs.

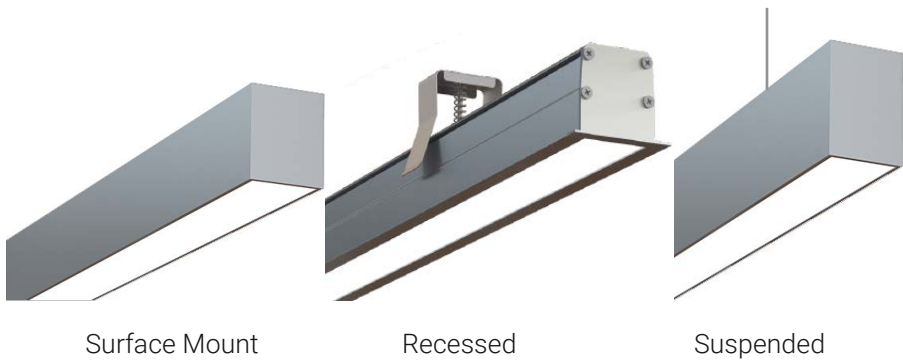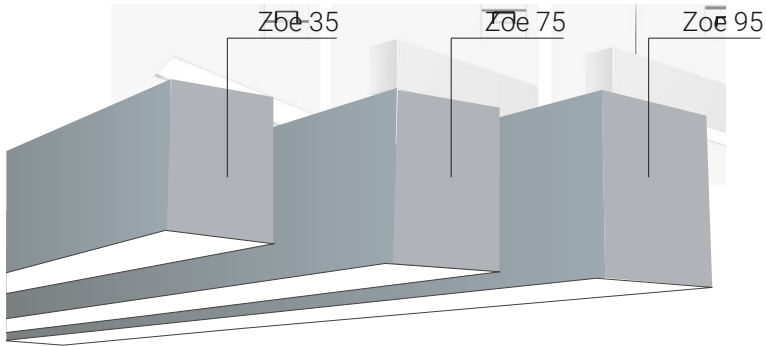


Shape Customization


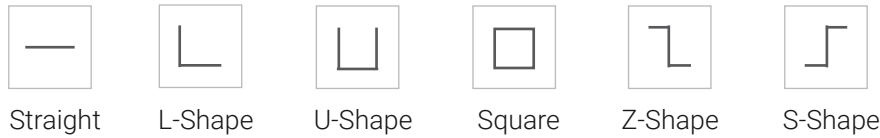


Finish Options



Light Distribution




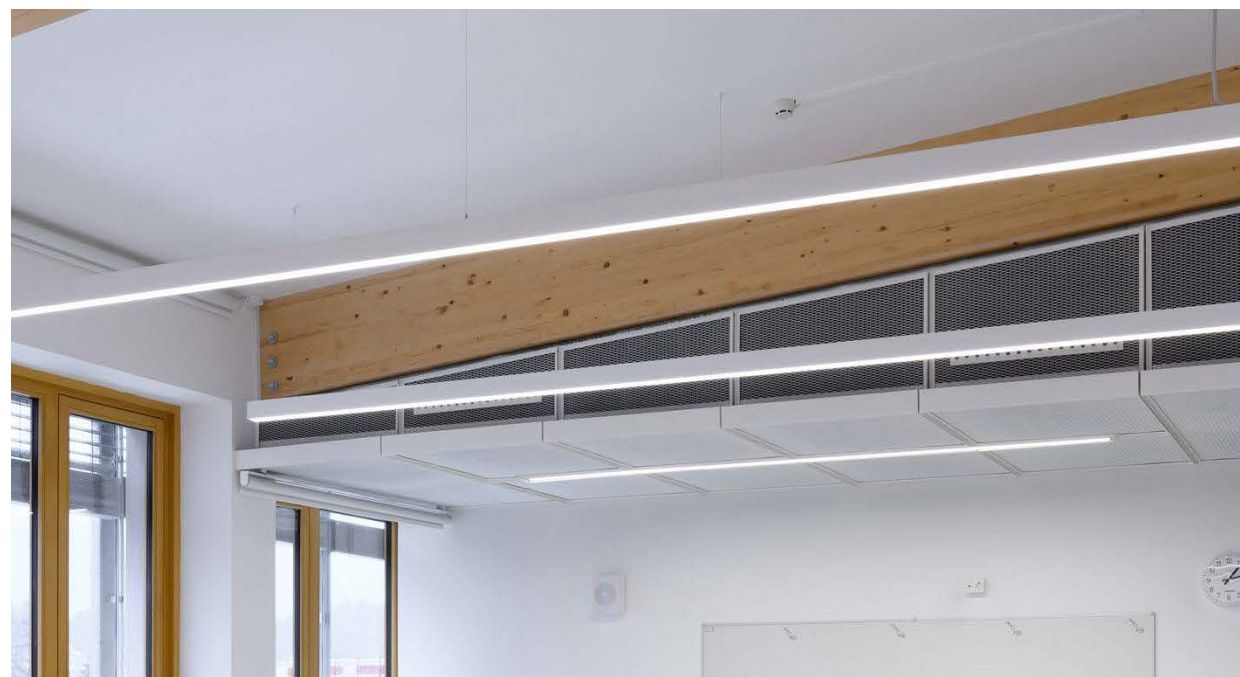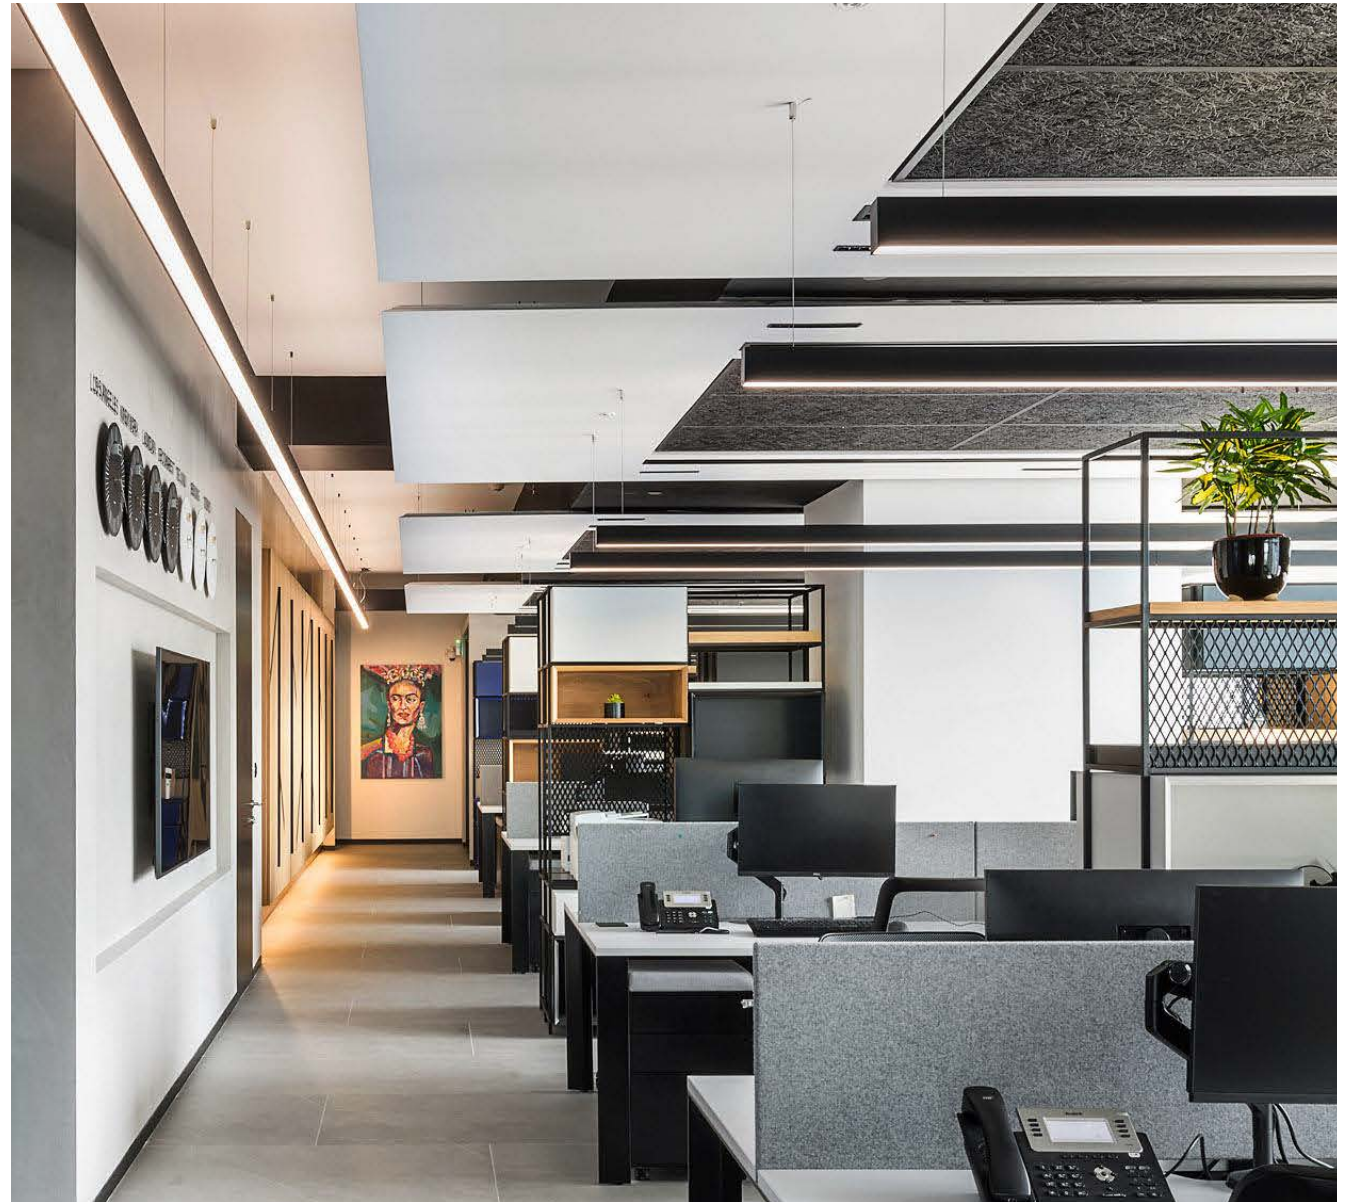

FLEX

TILTABLE LINEAR LIGHT

(3 wire - 1 phase)

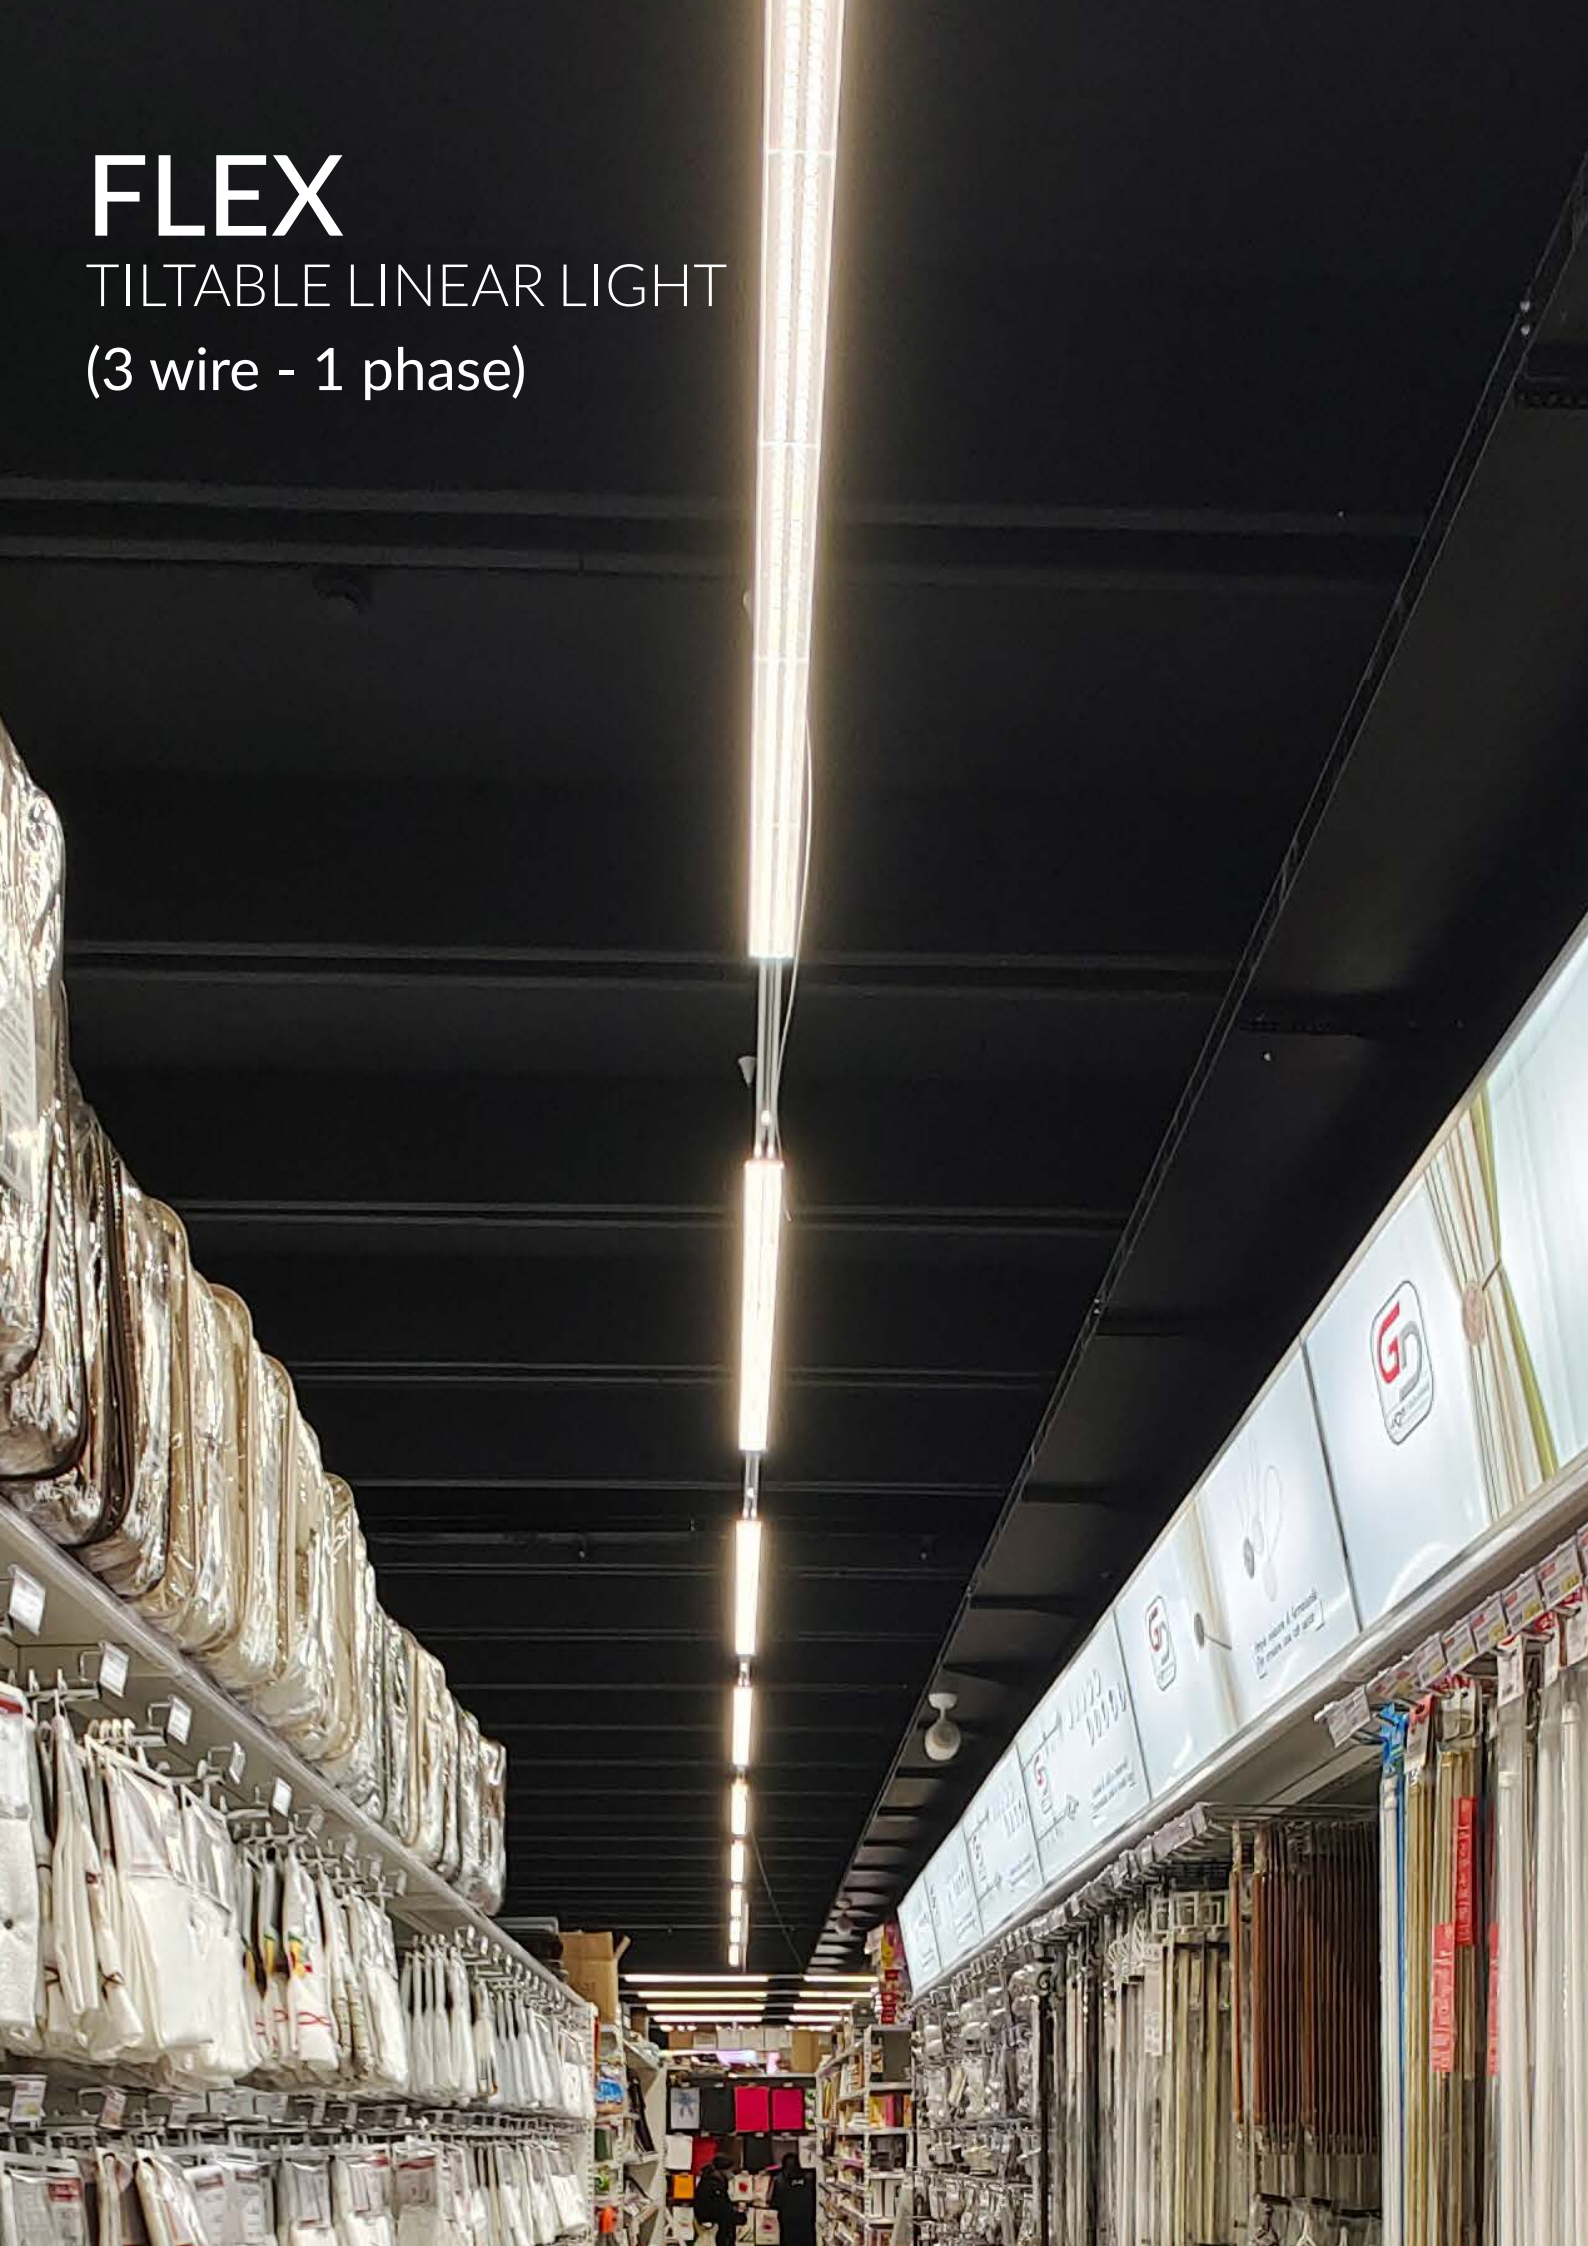

SYV | Tilttable Linear Light

Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -25°C ~ +50°C
Flicker metric Pst LM: <1.0
Stroboscopic effect metric SVM: <0.4
Material: Aluminum, PC
Finish: White
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Gyms, Hypermarkets, Supermarkets, Offices



Product Options:

Wattage: 18-24W, 45-60W
Beam Angle: SP60°, NR90°
CCT: 2700K - 6500K
Finish: Black
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Accessories: Suspension Kit, End Cap, Connector

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Flex	18655	35W/40W/ 45W/50W	4000K	160lm/W	330mA	30°	L: 1500	White
	18656	35W/40W/ 45W/50W	6000K	160lm/W	330mA	30°	L: 1500	White

AC220-240V

IP 20

30°

CRI>80

PF>0.9


2.5KV

SDCM <3

Class II

UGR<19








Track linear can be flexibly combined with track spotlights on the same track rail for general lighting & accent lighting.

Twin wings can be tiltable individually or simultaneously through 30° while the central linear light can't be tilted

Different diffuser lenses for different lighting distributions



Narrow 60°




Wide 90°




Flat 120°




Optic angle:30° x 30°
Tilting:0°




Optic angle:30° x 30°
Tilting:30°



Optic angle:30° x 90°
Tilting:0°



Optic angle:30° x 90°
Tilting:30°





CEILING

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +40°C
Material: Aluminium + Reflector
Finish: Matte Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:


Wattage: 15W / 20W
CCT: 3000K - 6000K
Beam Angle: 15°/24°/36°
Finish: Matte White
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ellie	(TRIAC Dimming) 17967	15W	3000K	1,200lm	350mA	40°	81.7x80	-
	(TRIAC Dimming) 17990	25W	3000K	2,000lm	350mA	50°	119.6x90x119.6	-
	(TRIAC Dimming) 18170	25W	4000K	2,125lm	350mA	40°	119.6x90x119.6	-
	(TRIAC Dimming) 17968	40W	3000K	3,200lm	350mA	40°	119.6x90x119.6	-


AC220-240V IP 44



CRI>90 PF>0.9



Total Height: 80mm



Total Height: 90mm



ELLIE
TRIAC DIMMABLE

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

CCT: 3000K - 6000K
Beam Angle: 15°/24°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Mira	17274	11W	3000K	660lm	250mA	38°	79x79x110	-
	17277	11W	3000K	660lm	250mA	38°	79x79x110	-

AC220-240V

IP44

38°

CRI>90



PF>0.9

SDCM <3

Class II

UGR<19





SKU 17274

SKU 17277

MIRA





MELLIZO

SYV | Ceiling lights

Product Specifications:


Lamp Type: PHILIPS LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 20W / 30W / 40W
CCT: 3000K - 6000K
Beam Angle: 20°/24°/30°/36°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



SKU 15158





SKU 15151

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Mellizo	15158	15W	4000K	975lm	350mA	60°	120x175	-
	15151	2x15W	4000K	2400lm	350mA	60°	230x120x175	-

AC220-240V IP 44  60° CRI>90 PF>0.9

 SDCM <3  Class II  UGR<19 





Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +40°C
Material: Aluminium + Reflector
Finish: Matte Black
Reflector: Chrome
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 25W / 30W
CCT: 3000K - 6000K
Beam Angle: 15°/30°
Finish: Matte White
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cara	17659	10W	3000K	600lm	250mA	45°	Ø82.5x106	-
	(TRIAC Dimming) 16806	20W	3000K	1,600lm	350mA	45°	Ø115x120.5	-

AC220-240V

IP 44

45°

CRI>90

PF>0.9


SDCM <3

Class II


UGR<19



10W



15W/20W



Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum+PC
Finish: White+Inner Black & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Changeable CCT

Product Options:

Beam Angle: 36°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Amara	18913	10W	3000K/4000K/6000K	70-80lm/W	300mA	60°	80x85	White+Inner Black
	18914	20W	3000K/4000K/6000K	70-80lm/W	300mA	60°	125x105	White+Inner Black
	19985	10W	3000K/4000K/6000K	70-80lm/W	350mA	60°	80x85	Black
	19986	20W	3000K/4000K/6000K	70-80lm/W	300mA	60°	125x105	Black

AC220-240V

IP 44

60°

CRI>90

PF>0.5


SDCM <3

Class II


UGR<19



10W



20W





KYRA
IP65

SYV | Ceiling lights

Product Specifications:

Lamp Type: BRIDGELUX LED
Driver: LIFUD
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:


Wattage: 10W / 20W / 30W / 50W
CCT: 3000K - 6000K
Beam Angle: 36°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Kyra	19661	60W	3000K	5,100lm	1500mA	60°	200x210	Black+Inner Black
	19660	60W	4000K	5,400lm	1500mA	60°	200x210	Black+Inner Black
	19659	60W	4000K	5,400lm	1500mA	60°	200x210	White+Inner White

AC220-240V IP 65  60° CRI>90 PF>0.5

 SDCM <3  Class II  UGR<19 



Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Lens: PMMA
Finish: Titanium
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 5W
CCT: 3000K - 6000K
Beam Angle: 24°/36°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Montura	14943	7W	3000K	420lm	170mA	15°	Ø55x200	-
	14944	7W	3000K	350lm	170mA	15°	Ø55x225	-

AC220-240V

IP44

38°

CRI>90


PF>0.9

SDCM <3

Class II

UGR<19



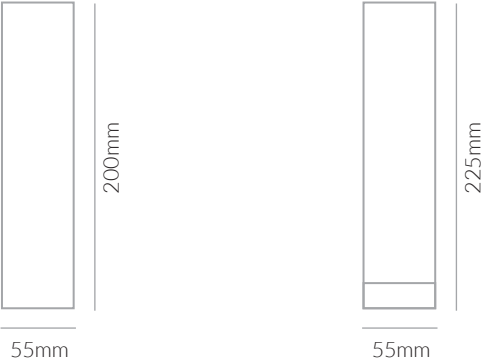



SAVONA

RECESSED CEILING

SYV | Ceiling lights

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

CCT: 4000K, 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



SKU 19907




SKU 19908

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Savona	19907	9W	3000K	720lm	200mA	36°	120x175	Ø35
	19908	9W	3000K	720lm	200mA	36°	230x120x175	Ø35

AC220-240V IP 44  CRI>90 PF>0.5

 SDCM <3  Class I  UGR<19 

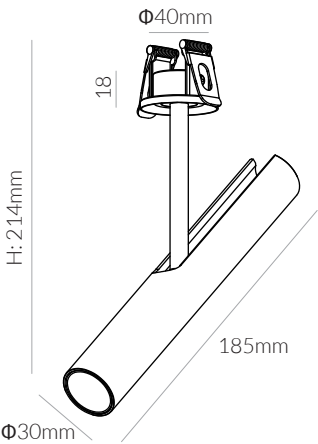

Cutout: Ø35mm

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Die cast Aluminium
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

CCT: 4000K, 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Trento	19909	9W	3000K	720lm	200mA	36°	Ø30x185	-
	19910	9W	3000K	720lm	200mA	36°	Ø30x185	-

AC220-240V

IP44

36°

CRI>90


PF>0.5

SDCM <3

Class I

UGR<19



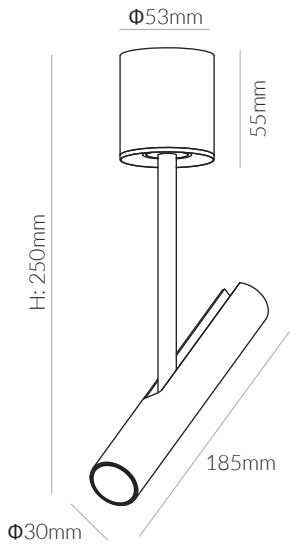

SKU 19909

SKU 19910



TRENTO
SURFACE MOUNTED



ALANA
SURFACE MOUNTED

SYV | Ceiling lights

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Finish: White & Black
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

CCT: 4000K, 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC



SKU 19905




SKU 19906

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Alana	19905	7W	3000K	560lm	150mA	36°	Ø41x80	-
	19906	7W	3000K	560lm	150mA	36°	Ø41x80	-

AC220-240V IP 44  CRI>90 PF>0.5

 SDCM <3  Class I  UGR<19 

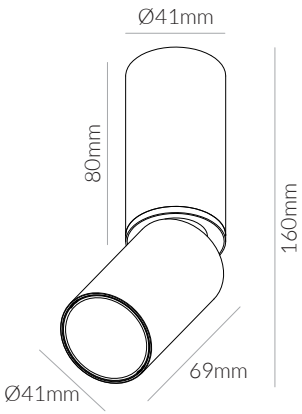

Product Specifications:

Lamp Type: PHILIPS LED
Driver: LIFUD
Operating Temp.: -20°C ~ +50°C
Material: Polycarbonate Body
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 18W / 24W
CCT: 3000K - 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Optional: Emergency Kit

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ostra	16823	10W	3000K	900lm	96mA	120°	Ø230x51	-
	16763	10W	6000K	1,000lm	96mA	120°	Ø230x51	-

AC220-240V

IP54

120°

CRI>80


PF>0.5

SDCM <3

Class II

UGR<19



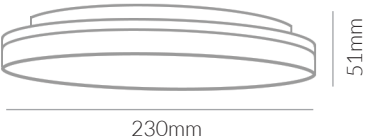

Product Specifications:

Lamp Type: SAMSUNG LED
Driver: OSRAM
Operating Temp.: -20°C ~ +40°C
Material: Die Cast Aluminum
Diffuser: PMMA
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 15W, 20W, 25, 40W, 80W, 120W, 140W, 180W
CCT: 3000K - 6000K
Finish: Black / Silver
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cerco	15185	100W	4000K	12,000lm	2400mA	120°	Ø900x95	-
	15659	140W	4000K	16,800lm	3600mA	120°	Ø1200x95	-
Cerco (Recessed)	15373	40W	4000K	3,400lm	1000mA	120°	Ø630x80	-
	15374	80W	4000K	6,800lm	2000mA	120°	Ø930x80	-

AC220-240V

IP42

120°

CRI>90





PF>0.9

SDCM <3

Class II

UGR<21



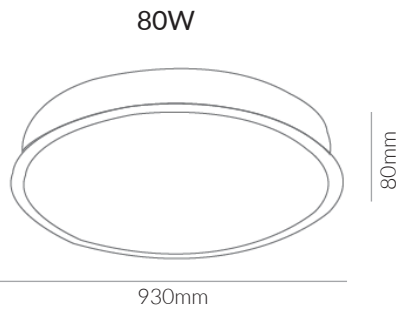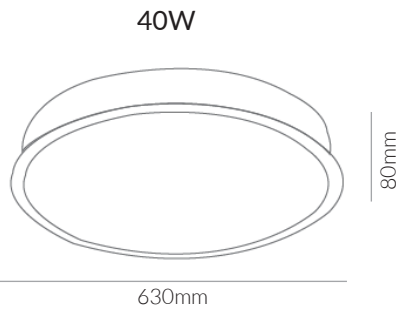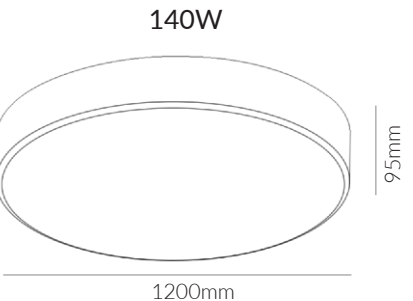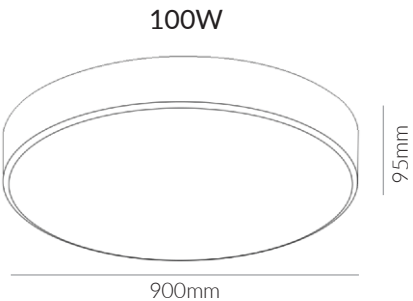



Product Specifications:


Lamp Type: EPISTAR LED
Operating Temp.: -20°C ~ +40°C
Material: PC+Aluminum
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 18W / 36W
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vasco	19152	24W	3000K/4000K/6500K	90-100lm/W	290mA	180°	Ø212x42	-
AC220-240V IP44  CRI>80 PF>0.5    								

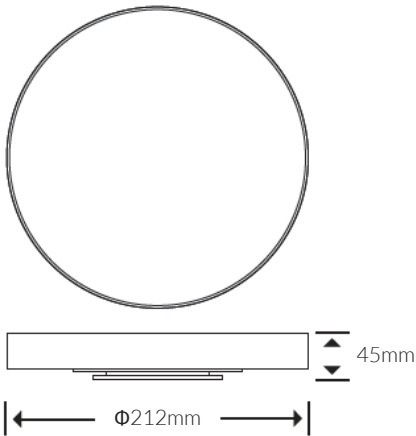

Product Specifications:


Lamp Type: EPISTAR LED
Operating Temp.: -20°C ~ +40°C
Material: Polycarbonate Body
Finish: White
Lifespan: 60,000 Hours
Warranty: 6 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 12W/18W/30W
CCT: 3000K, 6000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Noche	20351	25W	4000K	2500lm	325mA	120°	300x300x40	-
AC220-240V IP54  CRI>80 PF>0.5    								

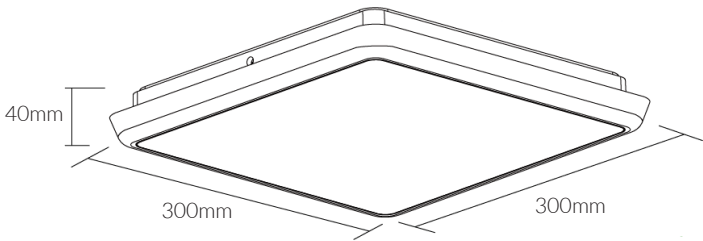

Product Specifications:

Lamp Type: LUMENS LED
Operating Temp.: -20°C ~ +40°C
Material: Aluminum Body
Finish: White
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

CCT: 3000K - 6000K
Beam Angle: Black
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Pisar	14738	4W	3000K	400lm	17mA	78°	Ø65x41	Ø56
	14739	4W	3000K	400lm	17mA	78°	Ø65x65x41	Ø56

AC220-240V

IP20

20°



CRI>80

PF>0.5

SDCM <4

Class II



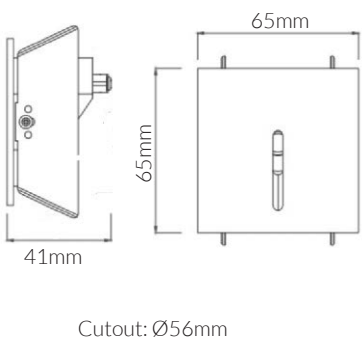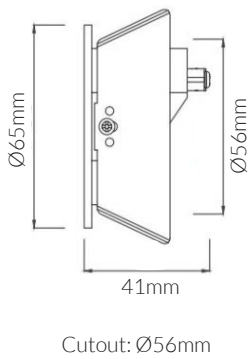

SKU 14738

SKU 14739

STEP LIGHT

BATTEN



Product Specifications:

Lamp Type: BRIDGELUX LED
Driver: LIFUD Driver
Operating Temp.: -20°C ~ +50°C
Material: Aluminum body+SS Clips
Diffuser: PC Diffuser
Finish: White
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Parking Lots, Warehouses, Basements, Car washing station, Tunnels, etc.

Product Options:

Wattage: 10W / 15W / 20W
Optional: Motion Sensor, Emergency Kit
Installation: Suspension Kit
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Lenora	17653	20W/30W/40W	3000K/4000K/6000K	125lm/W	-	120°	L:600	-
	17655	20W/30W/40W	3000K/4000K/6000K	125lm/W	-	120°	L: 1500 (5Ft)	-
	(sensor) 17656	20W/30W/40W	3000K/4000K/6000K	125lm/W	-	120°	L:600	-
	(sensor) 17657	20W/30W/40W	3000K/4000K/6000K	125lm/W	-	120°	L: 1200 (4Ft)	-
	(sensor) 17658	20W/30W/40W	3000K/4000K/6000K	125lm/W	-	120°	L: 1500 (5Ft)	-
	19056	24W/32W/40W	3000K/4000K/6000K	125lm/W	-	120°	L: 1200 (4Ft)	-
	19811	28W/35W/42W/50W	3000K/4000K/6000K	125lm/W	-	120°	L: 1500 (5Ft)	-

AC220-240V

IP65

120°

CRI>80



PF>0.5

SDCM <6

Class I

IK08



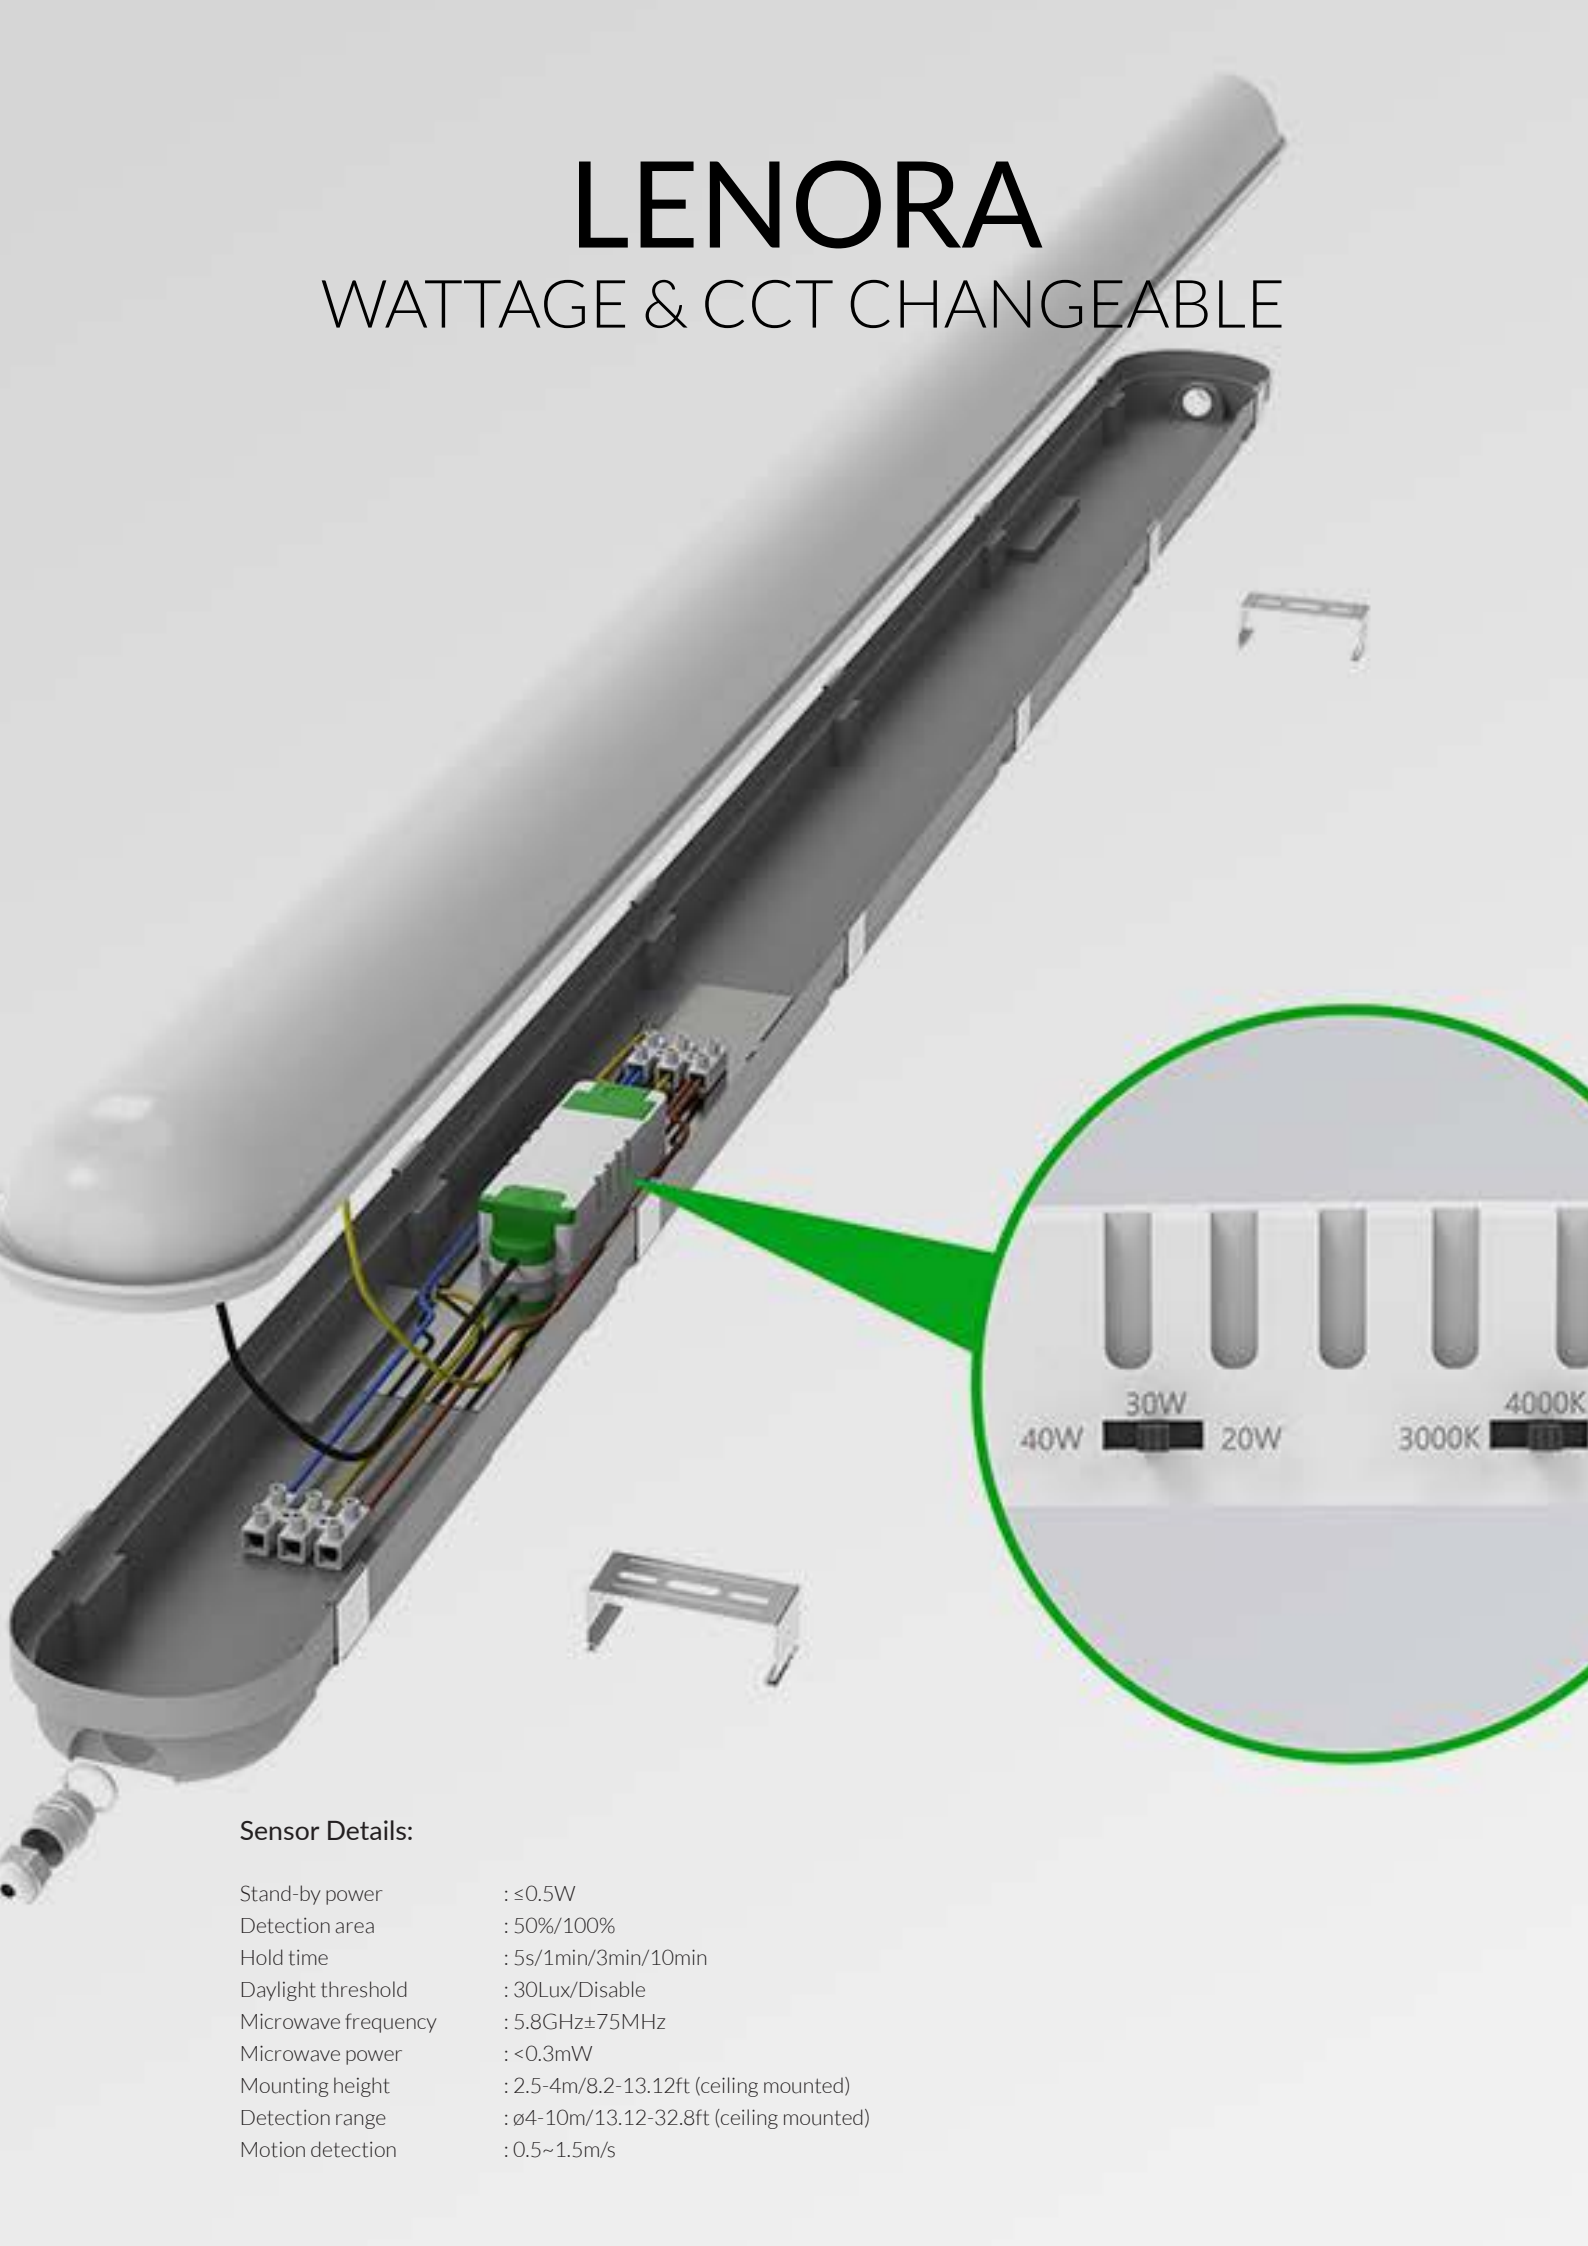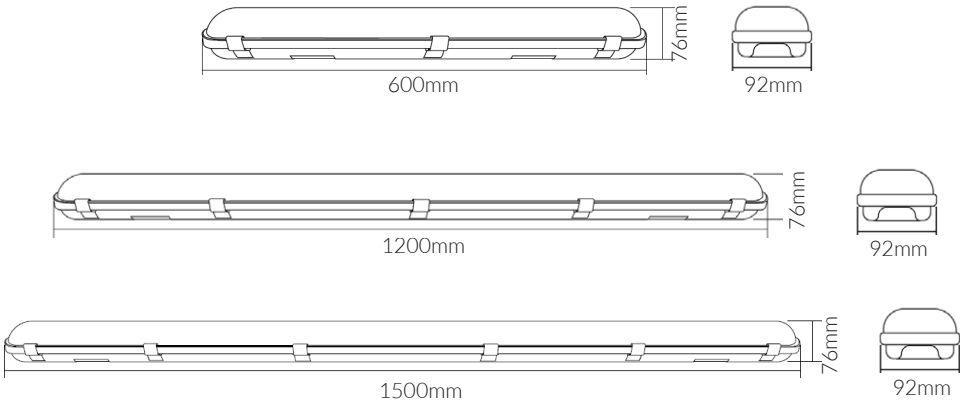

Sensor Details:

Stand-by power	: ≤0.5W
Detection area	: 50%/100%
Hold time	: 5s/1min/3min/10min
Daylight threshold	: 30Lux/Disable
Microwave frequency	: 5.8GHz±75MHz
Microwave power	: <0.3mW
Mounting height	: 2.5-4m/8.2-13.12ft (ceiling mounted)
Detection range	: ø4-10m/13.12-32.8ft (ceiling mounted)
Motion detection	: 0.5~1.5m/s



FARGO

LED Tri-Proof - IP69K

SYV | Batten Fittings

Product Specifications:

Lamp Type: OSRAM LED
Driver: BOKE Driver
Operating Temp.: -20°C ~ +50°C
Material: Glass/Sheet metal board
Finish: Silver
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Chemical plant, cooking plant, oil platform, Refinery, Car Wash, etc.


Product Options:

Wattage: 48W
CCT: 3000K - 6000K
Control: 0~10V, 1~10V, DALI, Microwave sensor



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Fargo	19445	36W	4000K	5400lm	-	120°	L: 1200 (4Ft)	-
AC220-240V IP 69K  CRI>80 PF>0.9								   

Configuration

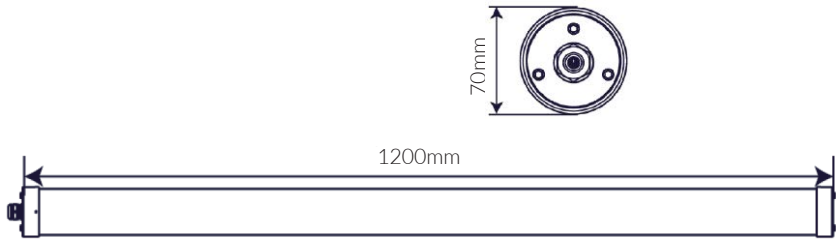


Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Extruded PC
Finish: Silver & Black
End Cap: Stainless steel 316
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Workspaces, offices, meeting rooms

Product Options:

Wattage: 48W
CCT: 3000K - 6000K
Beam Angle: 30° , 30x60°
Control: 0~10V, 1~10V, DALI, Microwave sensor

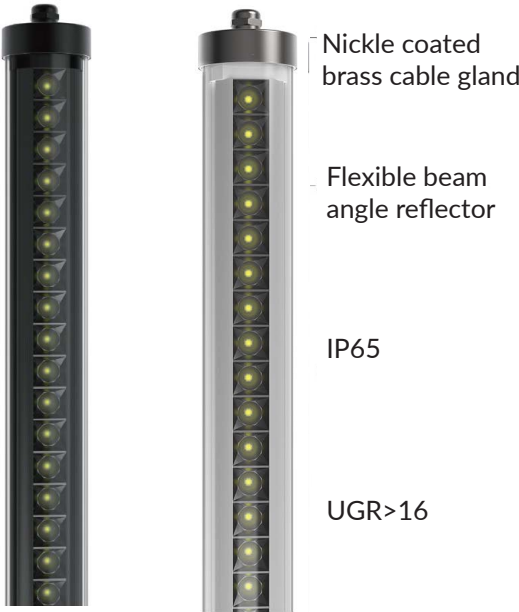

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Ferrol	19443	36W	4000K	4,140lm	-	50°	L:1130 x D:70	Black
	19444	36W	4000K	4,140lm	-	50°	L:1130 x D:70	Silver

AC220-240V

IP65

36°

CRI>80

PF>0.9

SDCM <3



Class I

IK10

UGR<16



Configuration

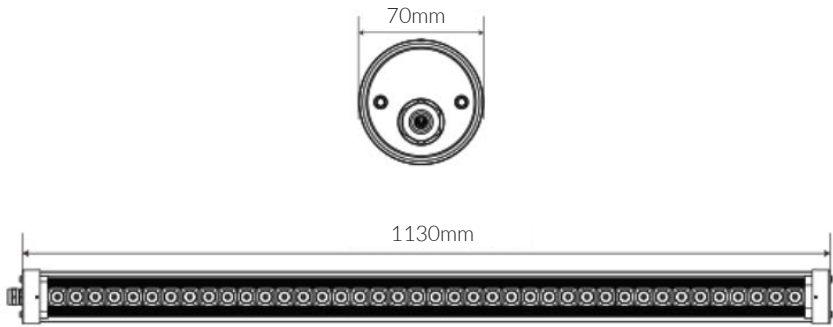

FERROL

WITH ANTI-GLARE GRILLE



Product Specifications:


Lamp Type: T8 Tube
Operating Temp.: -20°C ~ +50°C
Material: Natural Silicon gel Gasket + PC cover + ABS base
Finish: White
Warranty: 3 Years
Applications: Parking Lots, Warehouses, Basements, Car washing station, Tunnels, etc.



	SKU	Lamp	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Stark	11789	T8x1	-	-	-	-	L: 650	-
	11790	T8x2	-	-	-	-	L: 650	-
	14120	T8x2	-	-	-	-	L: 1260 (4Ft)	-
	11791	T8x1	-	-	-	-	L: 1280 (4Ft)	-
	11792	T8x2	-	-	-	-	L: 1235 (4Ft)	-


IP
65


120°


T8



SKU 11789/11790


650mm
150mm



90mm

SKU 14120


1260mm
92mm


130mm

SKU 11791


1280mm
105mm


70mm

SKU 11792


1235mm
150mm


90mm



STARK

T8 Fitting



HIGHBAY



OLIN

WATTAGE & CCT CHANGEABLE

SYV | Highbay

Product Specifications:

Lamp Type: PHILIPS LED
Operating Temp.: -40°C ~ +50°C
Material: Aluminum Alloy+PC Glass
Finish: Black
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Hypermarkets, Warehouse, Industrial, etc.

Product Options:

Beam Angle: 60°/90°
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Accessories: PC /Aluminum reflector, Safety rope, Adjustable brackets, Hanging Hook
Installation: Hook / Suspension / Pole







Aluminum reflector PC reflector

	SKU	W	CCT	LM	Surge	Beam	Size(mm)	Finish
Olin	19436	100W/150W/ 200W	3000K/4000K/ 6000K	160~170lm/W	10KV	110°	Ø320x164	Black

AC220-240V IP 65  CRI>70 PF>0.9

 SDCM <3  Class I  UGR<16 

Wattage & CCT Selection

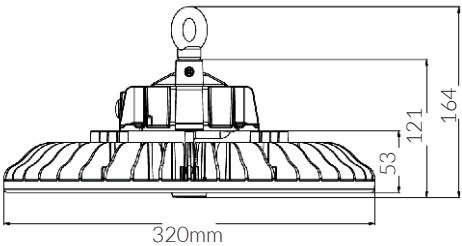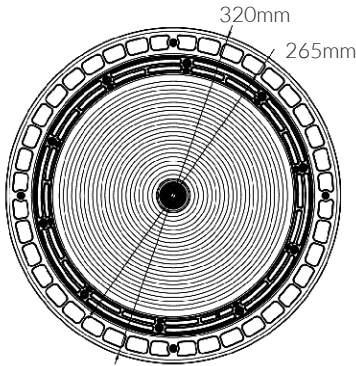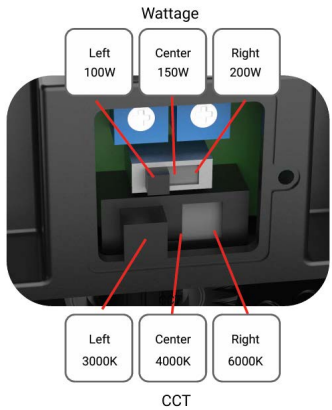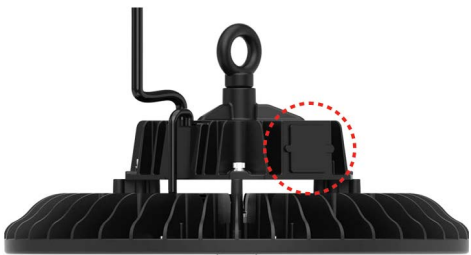

Product Specifications:

Lamp Type: Lumileds LED
Driver: LIFUD
Operating Temp.: -40°C ~ +50°C
Material: Aluminum Alloy+PC
Finish: Black
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Warehouse, Industrial, Hypermarket, Supermarket, etc.





Product Options:

Wattage: 60W, 240W, 300W, 400W, 500W
Beam Angle: 60°/120°
Accessories: Aluminum Reflector / PC Reflector

				SKU	W	CCT	LM	Surge	Beam	Size(mm)	Finish	
Esla				19856	100W/150W/ 200W	3000K/4000K/ 6000K	170lm/W	6KV	120°	Ø444x231	Black	
AC220- 240V	IP 65		CRI>70	PF>0.9					 SDCM <3	 Class I	 IK09	


Optional

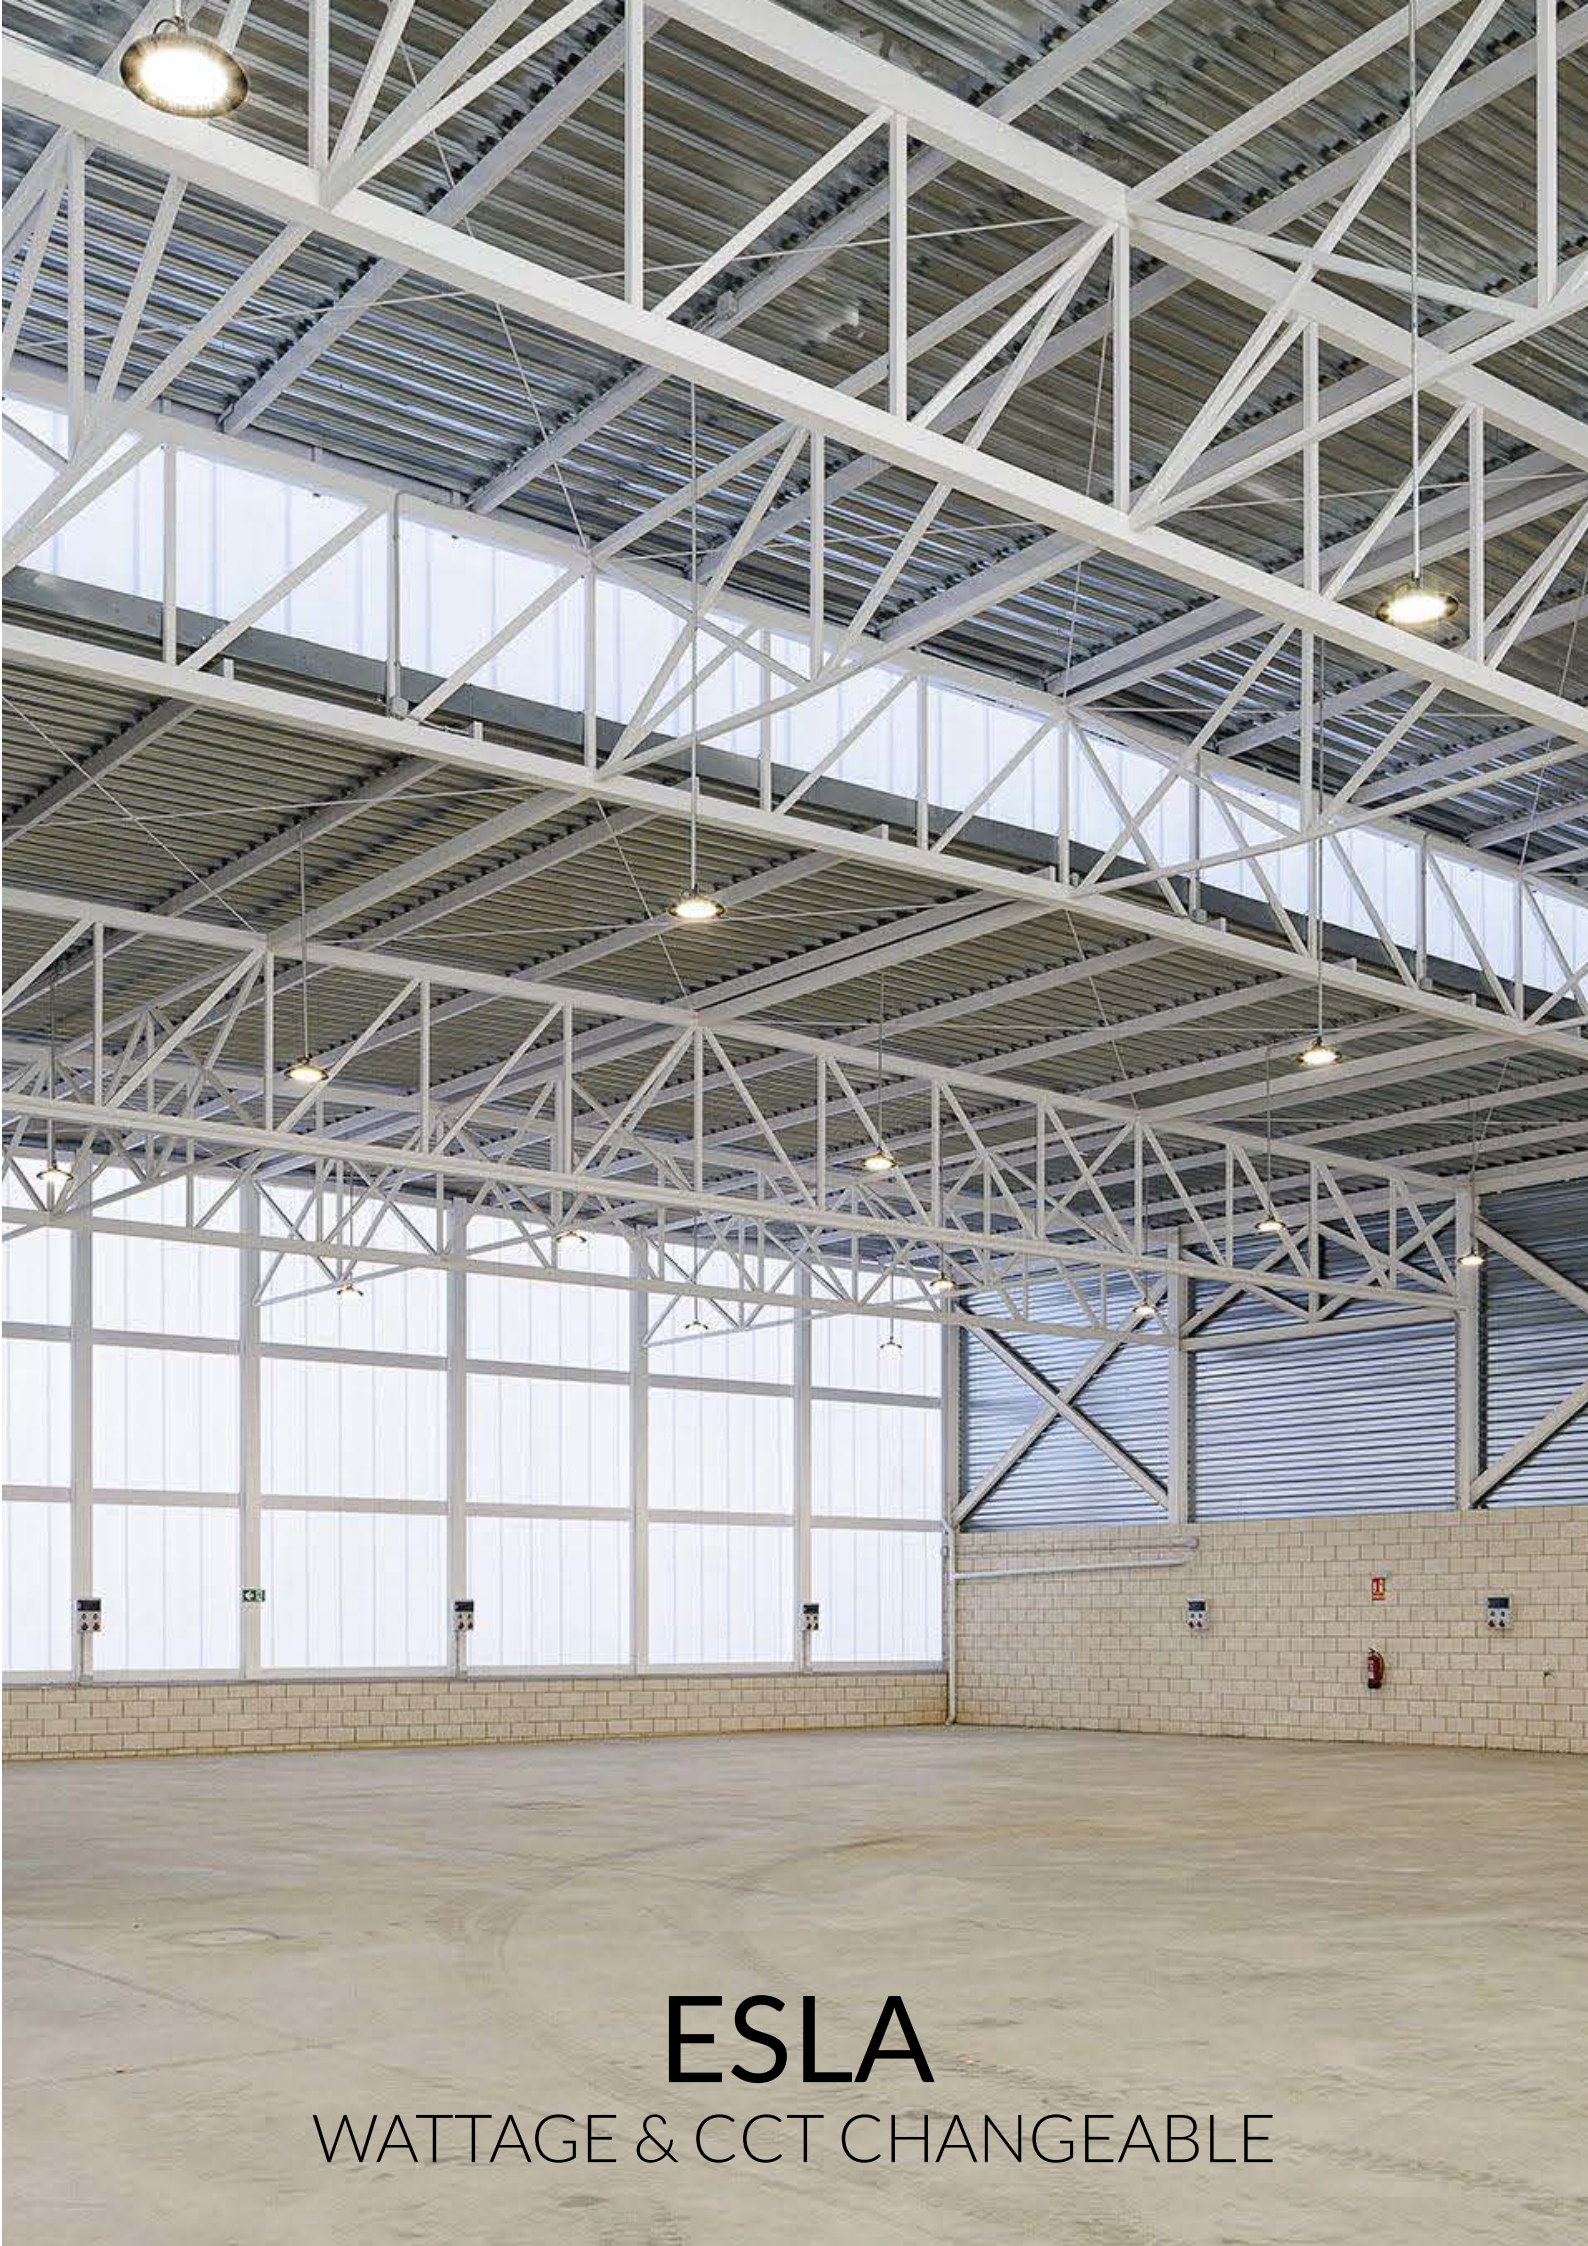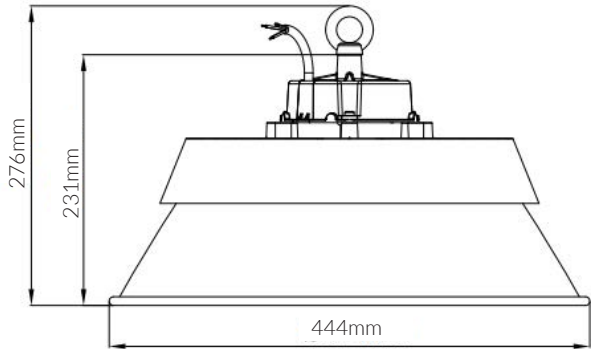

ESLA
WATTAGE & CCT CHANGEABLE

Product Specifications:

Lamp Type: Lumileds LED
Driver:PHILIPS
Operating Temp.: -40°C ~ +50°C
Material: Aluminum Alloy+PC
Finish: Black
Lifespan: 70,000 Hours
Warranty: 7 Years
Applications: Warehouse, Industrial, Hypermarket, Supermarket, etc.

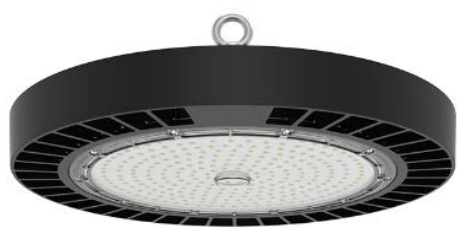

Product Options:

Wattage: 100W/200W/240W
CCT: 3000K, 4000K
Beam Angle: 60°/120°
Mounting: Ceiling Mounted
Accessories: PC /Aluminum reflector, Safety rope, Adjustable brackets, Hanging Hook

	SKU	W	CCT	LM	Surge	Beam	Size(mm)	Finish
Esla	19857	150W	6000K	25,500 lm	6KV	90°	Ø298x156	Black

AC220-240V

IP65

90°

CRI>70

PF>0.9


SDCM <3

Class I

IK09



Optional

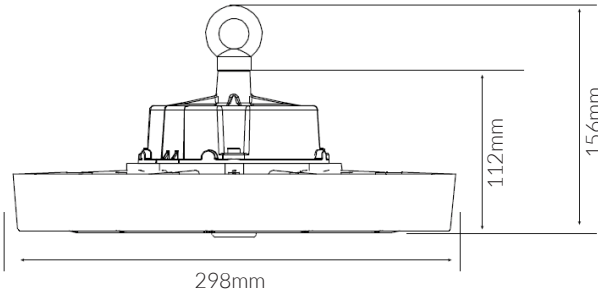

Product Specifications:

Lamp Type: PHILIPS LED
Operating Temp.: -40°C ~ +50°C
Material: Aluminum Alloy+Tempered Glass
Finish: Black
Lifespan: 70,000 Hours
Warranty: 7 Years
Applications: Warehouse, Industrial, Hypermarket, Supermarket, etc.



Product Options:

Wattage: 100W/150W/240W
CCT: 3000K, 4000K
Control: Switchable / DALI / 1-10V / 0-10V / TRIAC
Optional: 12V Plug-and-Play PIR or Microwave, motion sensor, Emergency Kit,
Installation: Hook / Suspension / Pole

	SKU	W	CCT	LM	Surge	Beam	Size(mm)	Finish
Trejo	19264	200W	6000K	40,800lm	10KV	110°	Ø320x188	Black

AC220-240V

IP65

110°

CRI>80

PF>0.9


SDCM <3


Class I

UGR<16



Optional

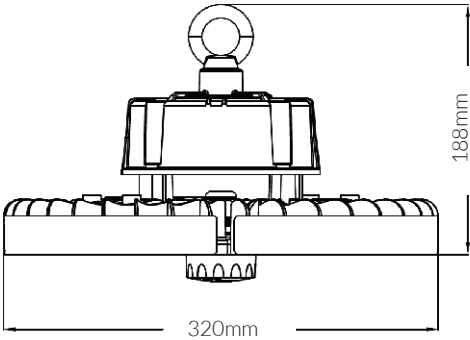

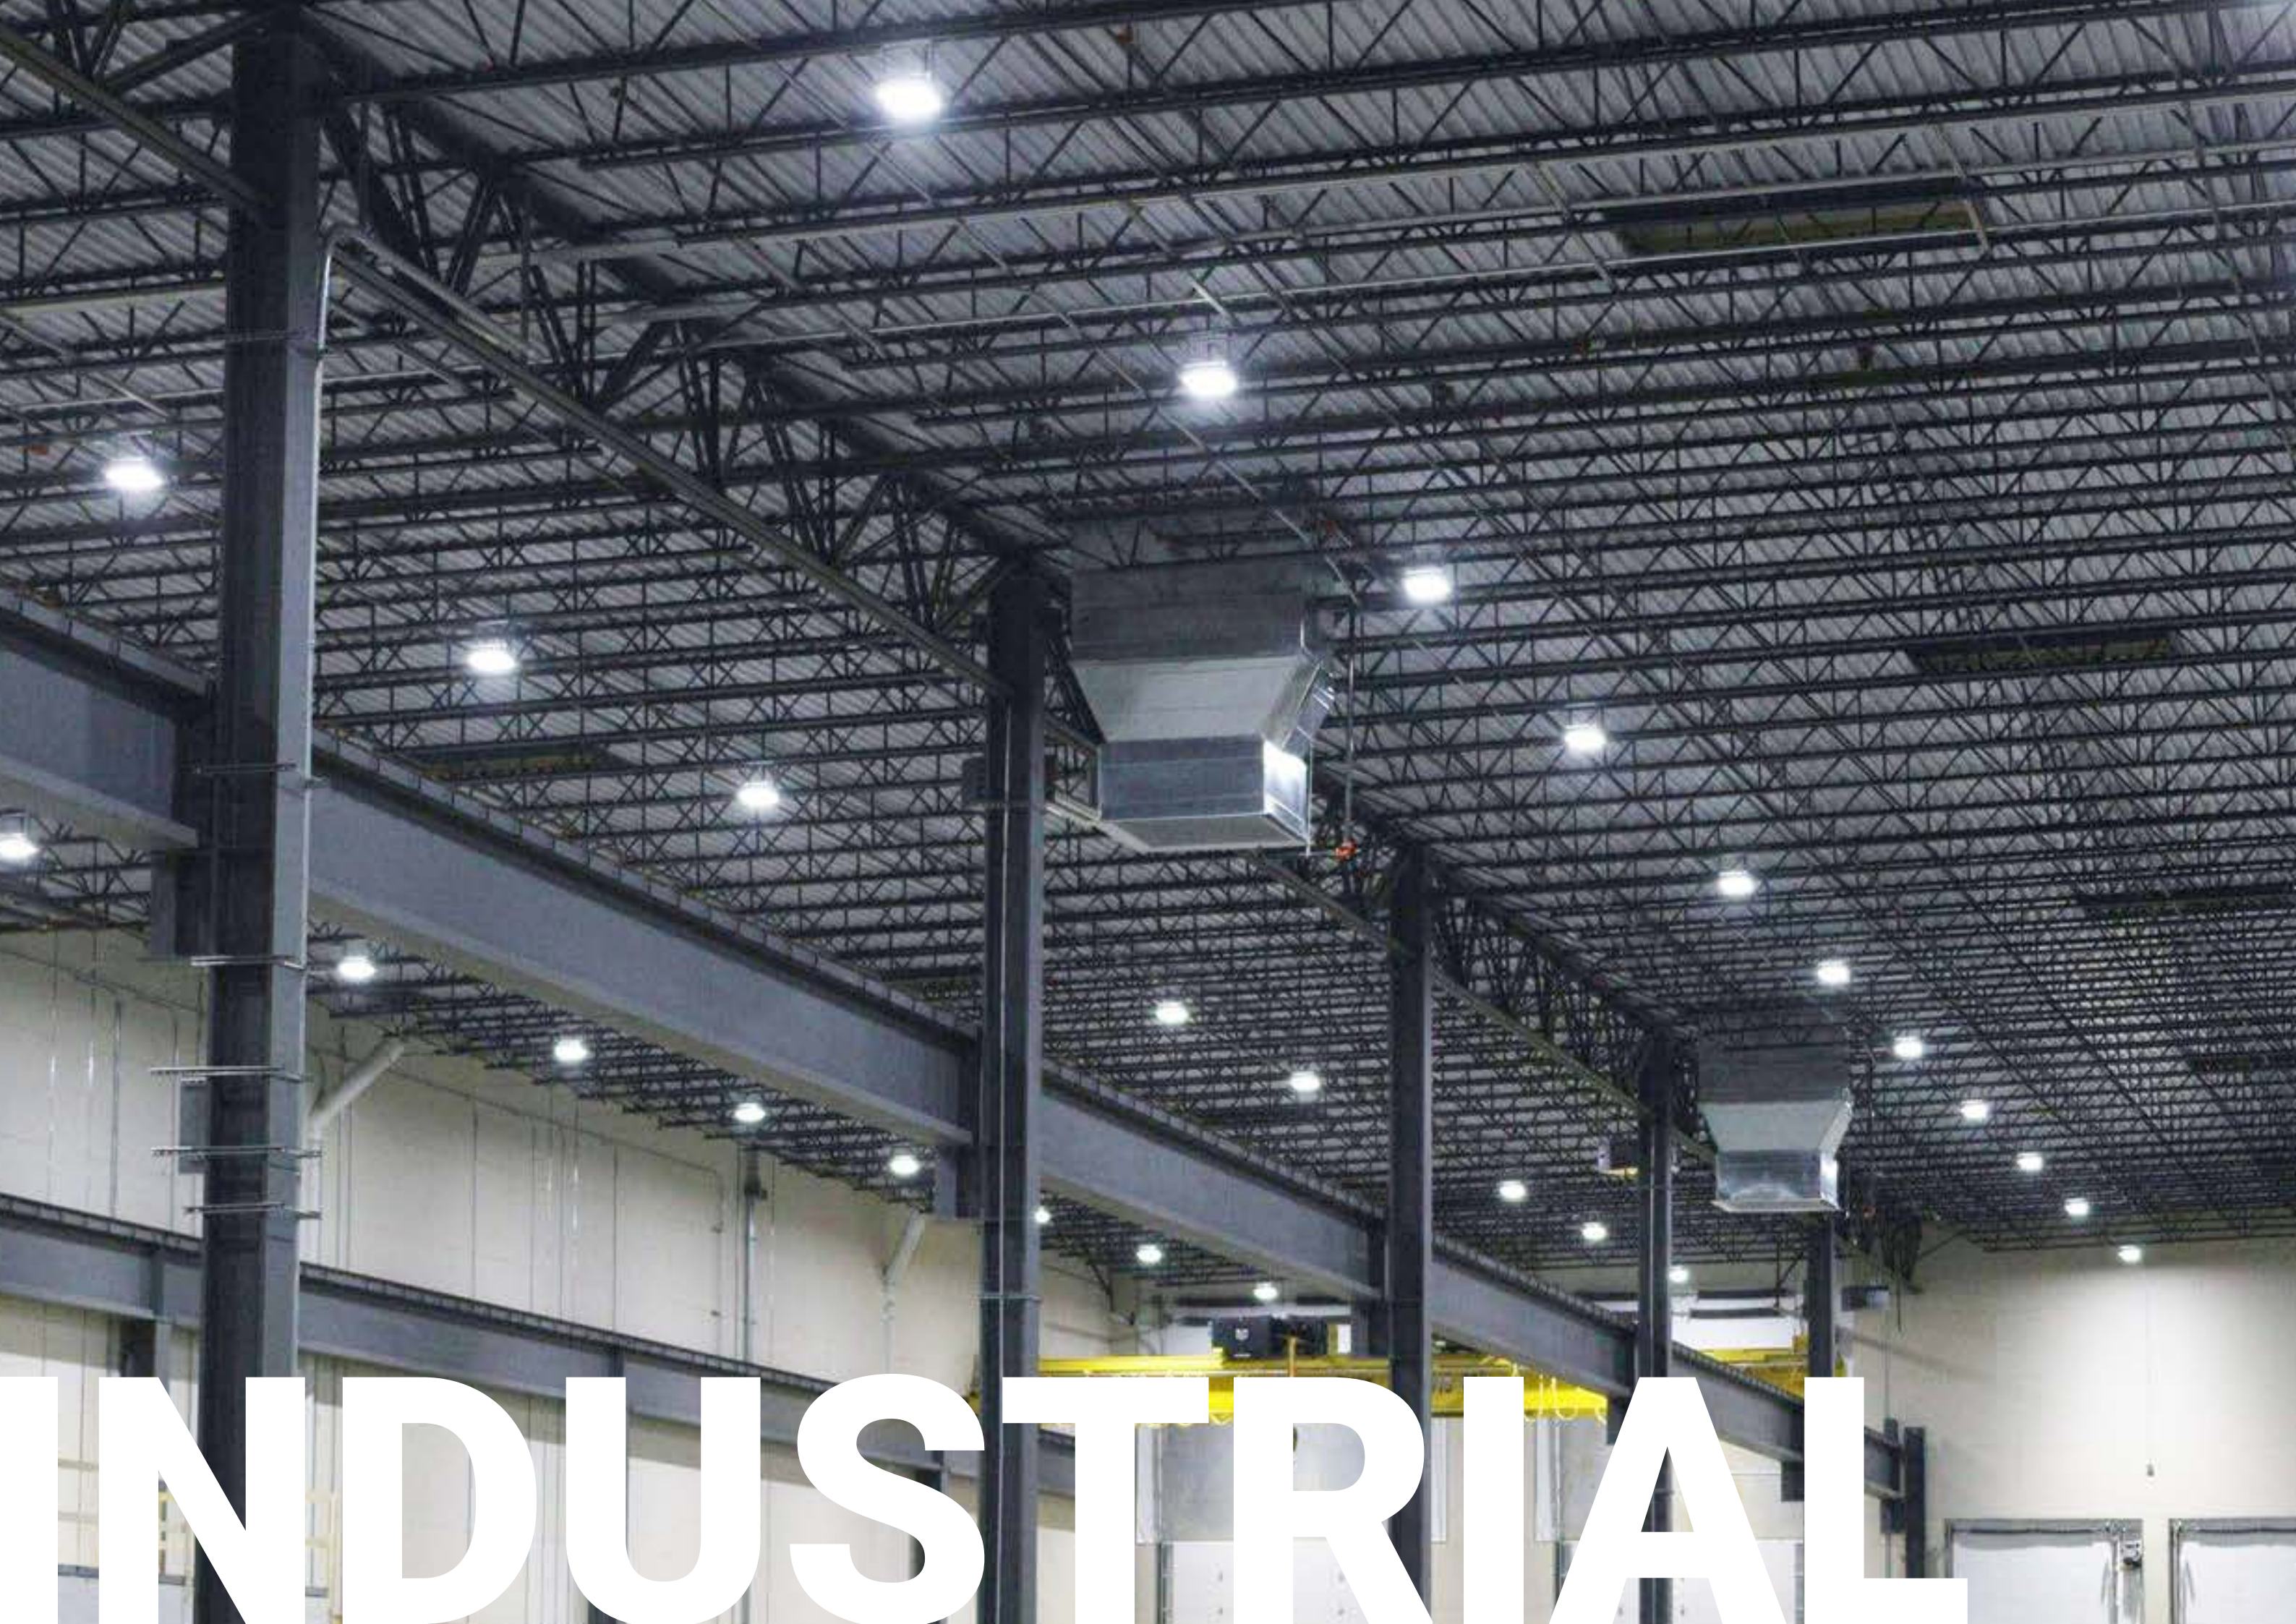

INDUSTRIAL

Product Specifications:

Lamp Type: Lumileds LED
Operating Temp.: -40°C ~ +40°C
Material: Die-cast Aluminum+ UV Resistance PC body
Finish: Black
Lifespan: 50,000 Hours (Ta=30°C@L80)
Warranty: 5 Years
Applications: Warehouse, Industrial, etc.



Product Options:

Finish: Bronze/White Customized (Optional)
Control: Switchable, TRIAC, 1-10V, DALI, 0-10V
Optional: Microwave sensor, photocell sensor / Emergeny battery backup

	SKU	W	CCT	LM	Beam	Size(mm)	Finish
Jeron	19093	25/15/10/8W (Tunable)	3000K/4000K/ 5000K (Tunable)	130lm/W	115°×100°	140.6 x 86 x 208.8mm	Black

AC220-240V

IP65

115°×100°

CRI>70


PF>0.9

SDCM <4




Class II

IK08



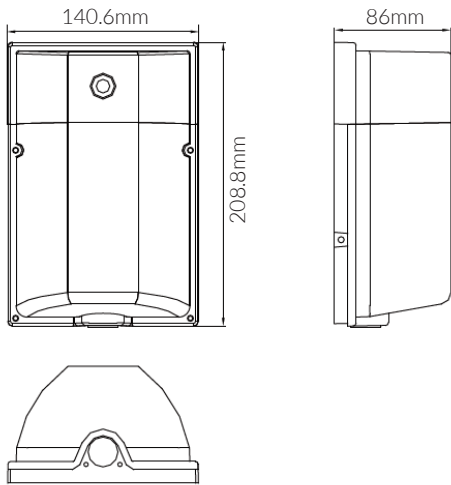

FEATURES

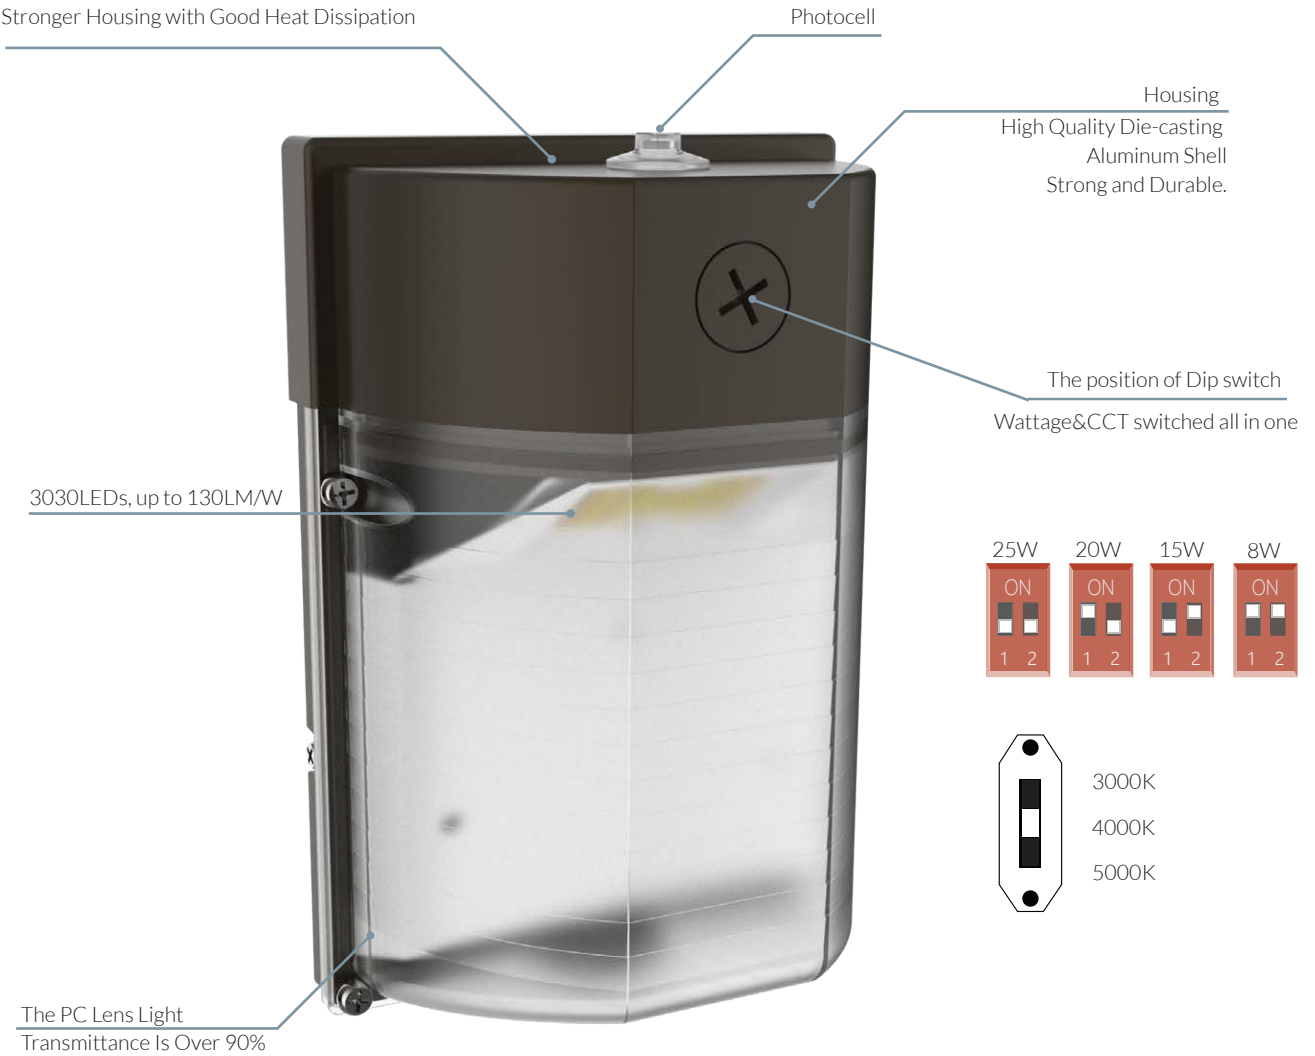

Driver Inside

Mounting Plate

ACCESSORIES



Surge Protection



Photocell



Multiple Pluggable Microwave Motion Sensor Optional (Z10, Zhaga, AUX etc)



Product Specifications:

Lamp Type: Lumileds LED
Operating Temp.: -40°C ~ +40°C
Material: Die-cast Aluminum
Finish: Black
Lifespan: 50,000 Hours(Ta=30°C@L80)
Warranty: 5 Years
Applications: Warehouse, Industrial, etc.



Product Options:

Finish: Bronze/White Customized (Optional)
Control: Switchable, TRIAC, 1-10V, DALI, 0-10V
Optional: Microwave sensor, photocell sensor / Emergeny battery backup

	SKU	W	CCT	LM	Beam	Size(mm)	Finish
Javi	19094	120/100/80/60W (Tunable)	3000K/4000K/5000K (Tunable)	140lm/W	110°×105°	363x x191 x 234mm	Black

AC220-240V

IP 65

110°×105°

CRI>70



PF>0.9

SDCM <4

Class II

IK08



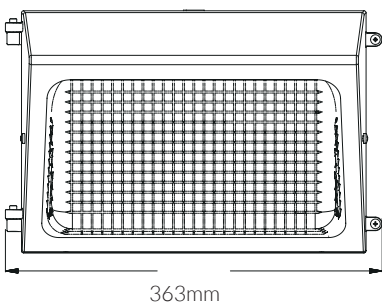

Product Specifications:

Lamp Type: Lumileds LED
Operating Temp.: -40°C ~ +40°C
Material: Die-cast Aluminum
Finish: Black
Lifespan: 50,000 Hours(Ta=30°C@L80)
Warranty: 5 Years
Applications: Warehouse, Industrial, etc



Product Options:

Wattage: 40/35/30/25W
Finish: Bronze/White Customized (Optional)
Control: Switchable,TRIAC,1-10V, DALI,0-10V
Optional: Microwave sensor, photocell sensor / Emergeny battery backup

	SKU	W	CCT	LM	Beam	Size(mm)	Cut(mm)
Noche	19166	75/60/50/40W (Tunable)	3000K/4000K/5000K (Tunable)	130lm/W	135°	269x265x91.6	-

AC220-240V

IP 65

135°

CRI>80

PF>0.5


0-10V

SDCM <3

Class II

IK08



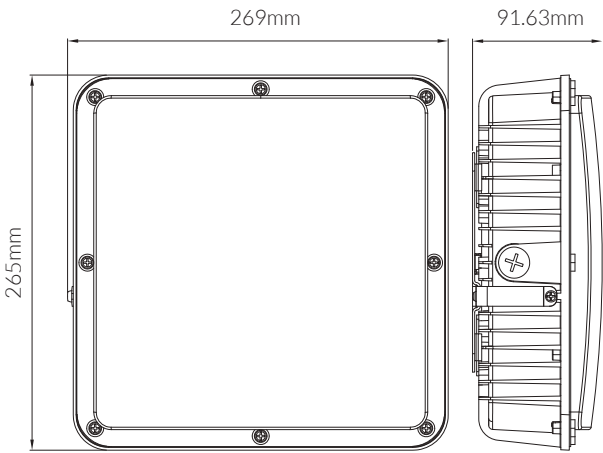



SPOTLIGHT


FRAMES

Product Specifications:

Lamp Type: GU10
Material: Die Cast Aluminum
Finish: White
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cayo	16993	-	-	-	-	-	Ø95x50	Ø80-85




Product Specifications:

Lamp Type: GU10
Material: Die Cast Aluminum
Finish: White
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cinta	16992	-	-	-	-	-	Ø82x40	Ø70-75



CAYO/
CINTA




SYV | Recessed Spotlight Frames

Product Specifications:

Lamp Type: GU10
Material: Die Cast Aluminum
Finish: White
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Alva	16991	-	-	-	-	-	Ø95x50	Ø80-85




Product Specifications:

Lamp Type: GU10
Material: Die Cast Aluminum
Finish: White
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Poquito	16993	-	-	-	-	-	Ø83x43	Ø69



Cutout: Ø69mm



POQUITO



Product Specifications:

Lamp Type: GU10
Material: Die Cast Aluminum
Finish: White & Black
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality




SKU 18442

SKU 18497



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Delfi	18442	-	-	-	-	-	Ø80x57	Ø75
	18497	-	-	-	-	-	Ø80x57	Ø75



Cutout: Ø75mm



DELFI




MIRROR & BATHROOM

Product Specifications:

Lamp Type: EPISTAR LED
Operating Temp.: -20°C ~ +40°C
Material: ABS + Aluminium
Finish: Sanded Black
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Clon Max	19867	12W	3000K/4000K/ 6000K	80lm/W	-	-	600x140x60	-
AC220- 240V	IP 44	CRI>80	PF>0.9				 SDCM <3	 Class II
								

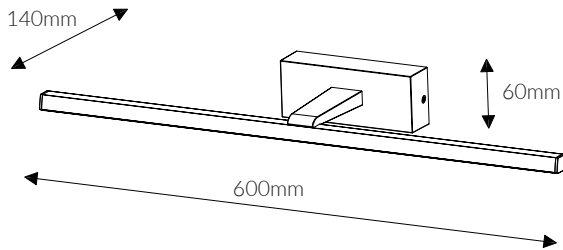



ERIN
CCT CHANGEABLE

Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +40°C
Material: Aluminum+PC
Finish: White & Black
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	Beam	Size(mm)	Finish
Erin	17981	10W	3000K/4000K/6000K	100-120lm/W	-	580 x 41 x 111mm	Black
	17982	10W	3000K/4000K/6000K	100-120lm/W	-	580 x 41 x 111mm	White

AC220-240V IP 44 CRI>80 PF>0.9

SDCM <3 Class II CE

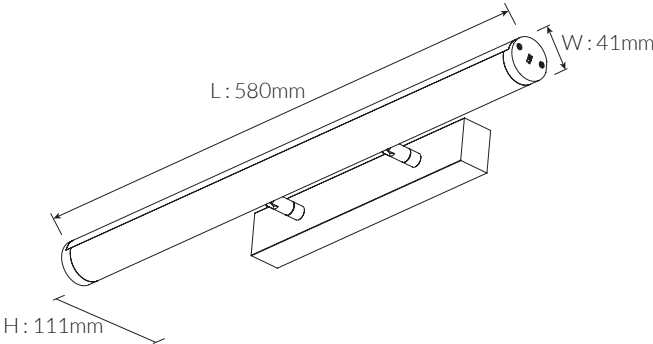


Product Specifications:

Lamp Type: EPISTAR LED
Operating Temp.: -20°C ~ +40°C
Material: Iron + Stainless steel
Finish: Chrome
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Mato	19990	18W	3000K/4000K/ 6000K	65-75lm/W	-	-	820x 80 x 80	-
AC220- 240V	IP 44	CRI>80	PF>0.9					
				 SDCM <3	 Class II			

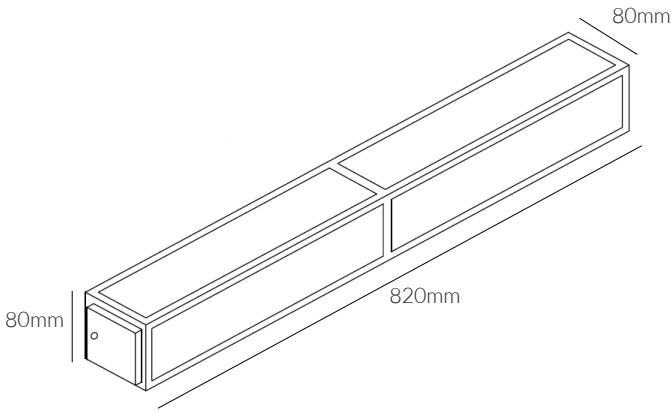

MATO
CCT CHANGEABLE



Product Specifications:

Lamp Type: EPISTAR LED
Operating Temp.: -20°C ~ +40°C
Material: Iron+Aluminum+PC
Finish: Black+Brass
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Calvo	19991	12W	3000K/4000K/6000K	65-75lm/W	-	-	600x120x112.5	-

AC220-240V

IP44


CRI>80

PF>0.9

SDCM <3

Class II

CE

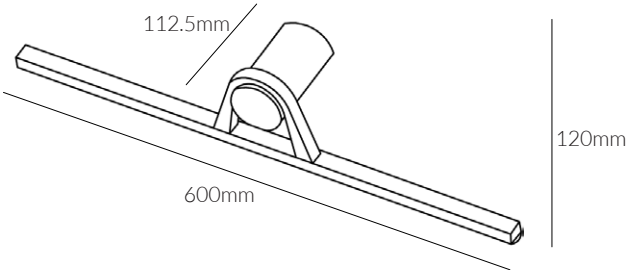

Product Specifications:

Lamp Type: EPISTAR LED
Operating Temp.: -5°C ~ +40°C
Material: Powder coated Aluminium + PMMA Cover
Finish: White
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	Beam	Size(mm)	Finish
Espejo	15215	10W	3000K	950lm	150°	604 x 54 x 65	White

	15731	10W	6000K	1050lm	150°	604 x 54 x 65	White
--	-------	-----	-------	--------	------	---------------	-------

AC220-240V

IP44


CRI>80

PF>0.9


SDCM <3

Class II

CE

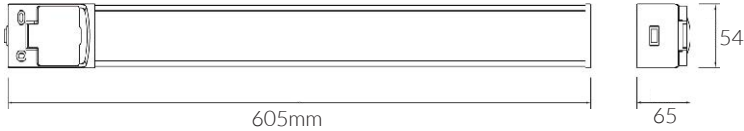

STRIP LIGHTS

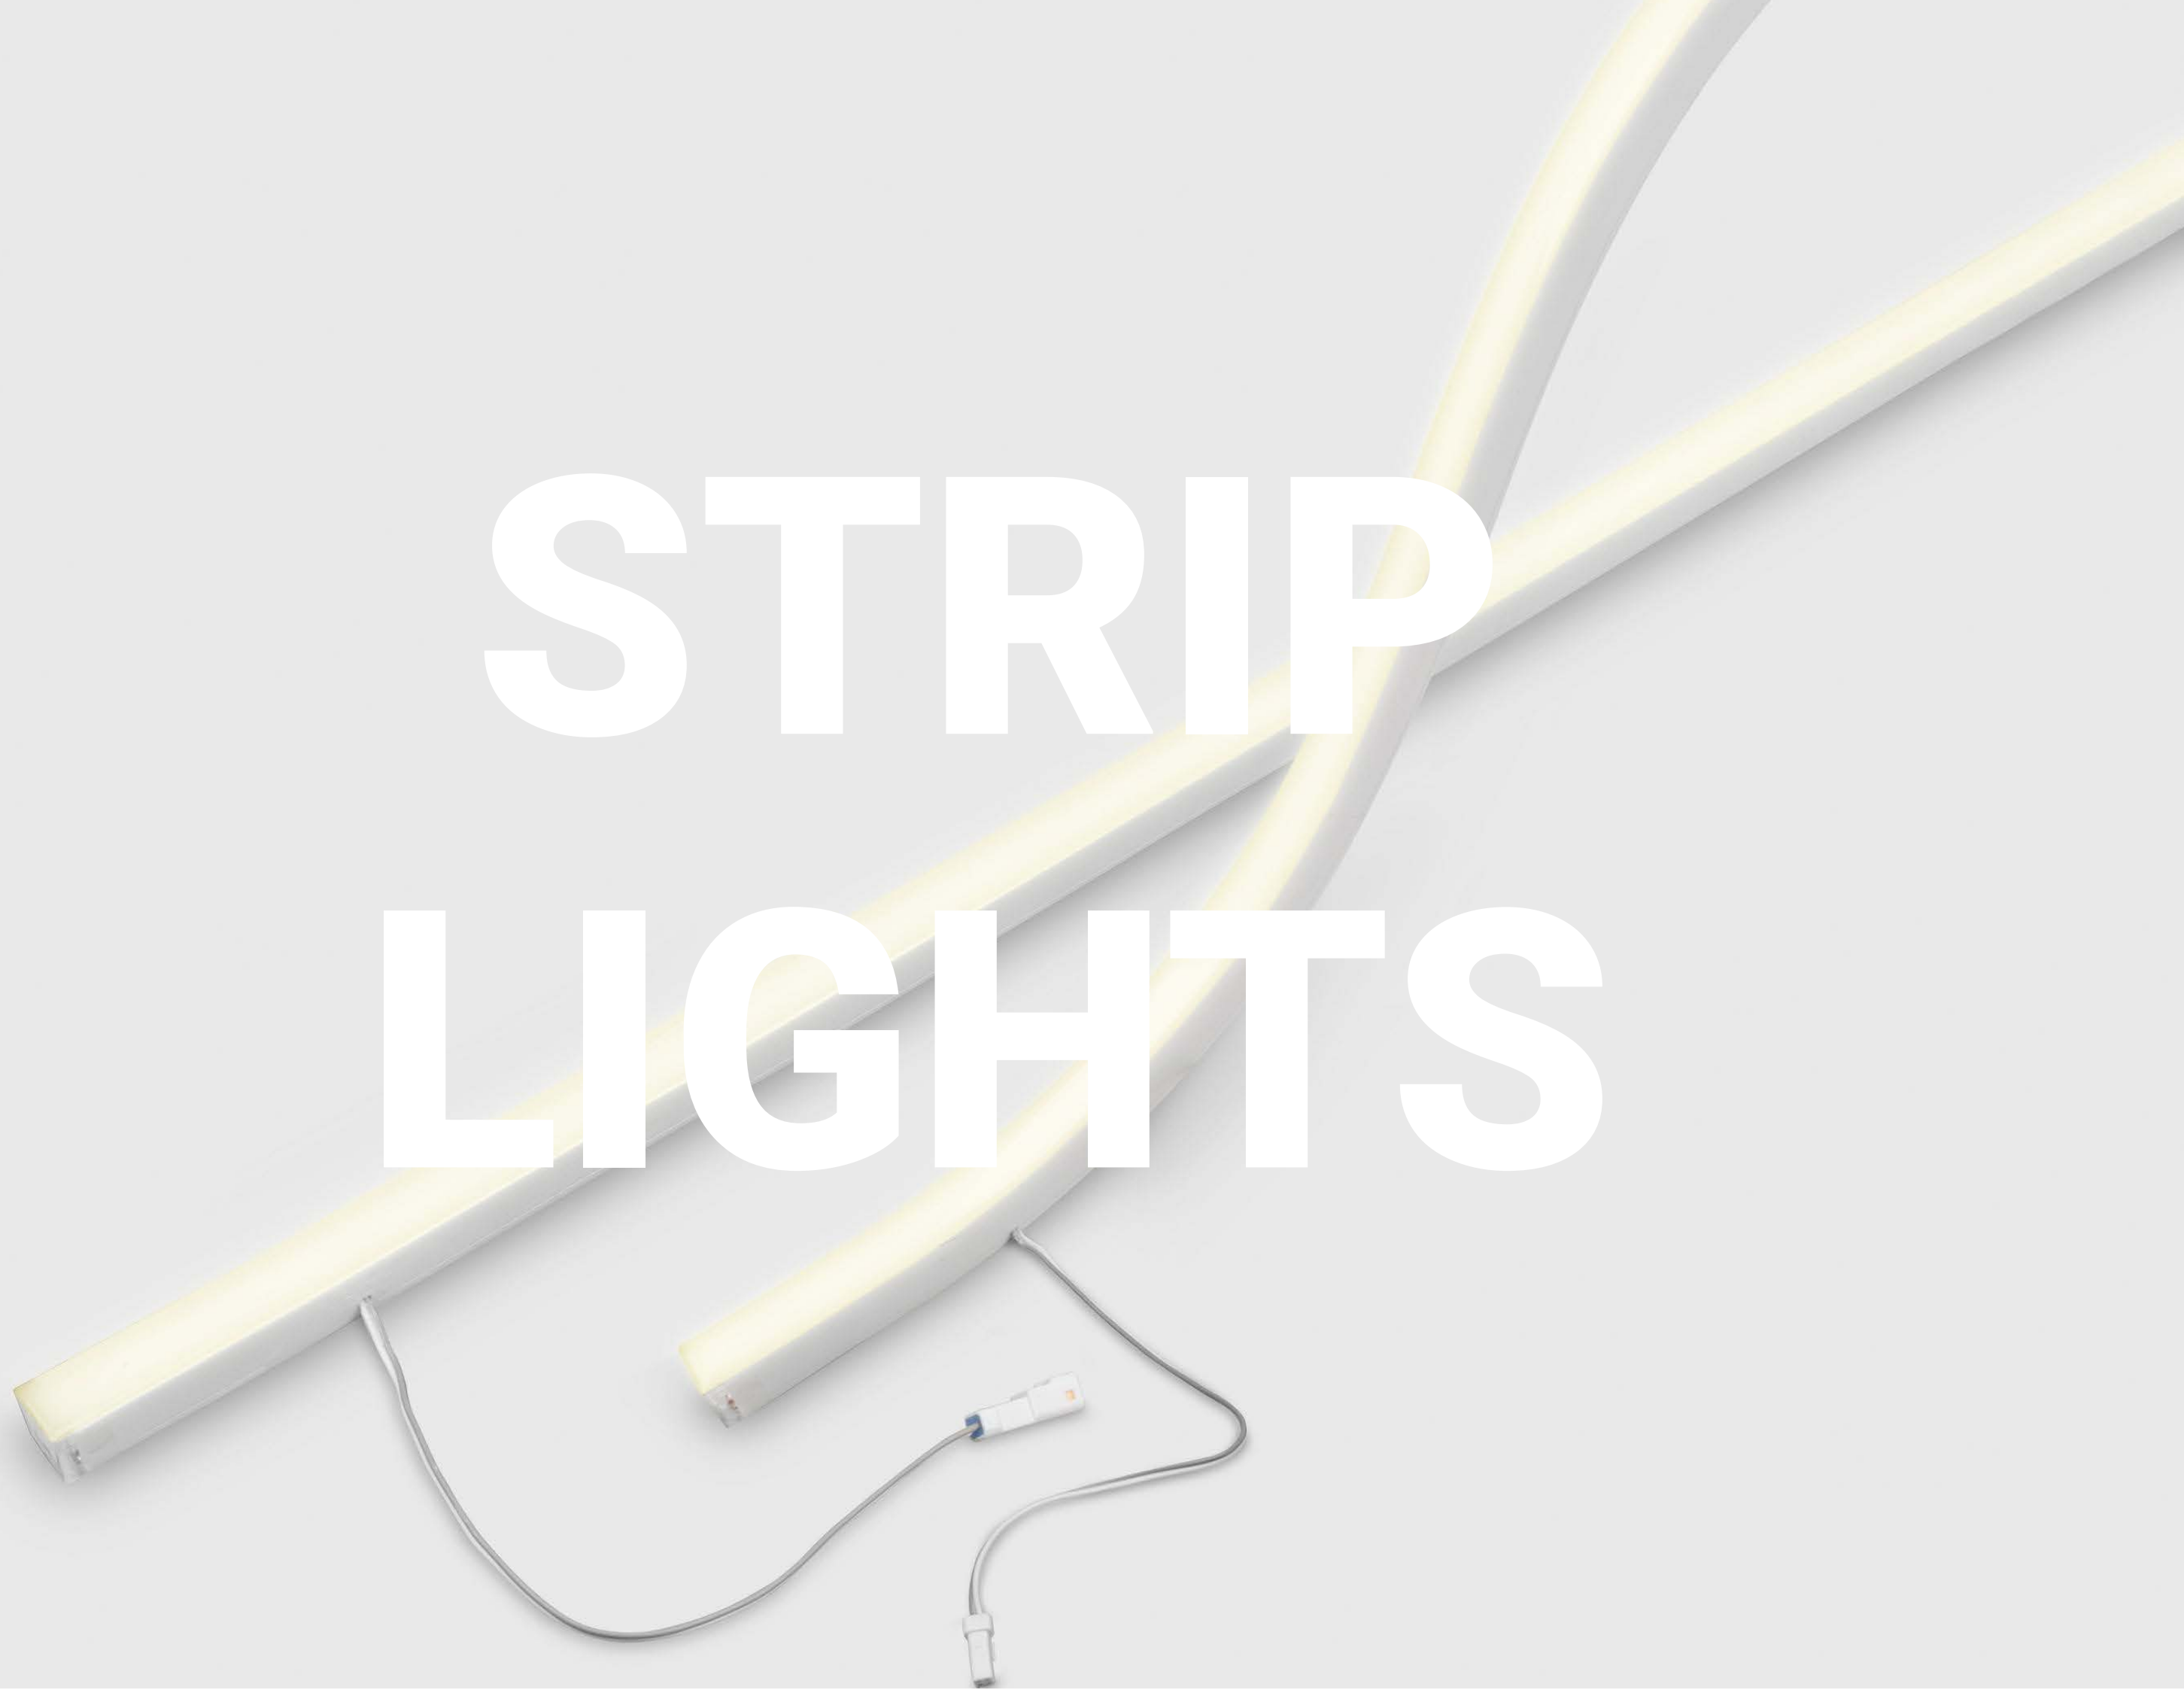

PILLA

DC12V

SYV | Strip Lights

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +40°C
Material: Tape on the Back
Finish: White
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:


CCT: 2700K-6000K
Control: TRIAC/1-10V/DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Pilla	14499	13W/mtr	3000K	840lm/M	-	120°	5mtr Roll	-
	14500	13W/mtr	6000K	840lm/M	-	120°	5mtr Roll	-
Pilla Pro	15482	13W/mtr	4000K	910lm/M	-	120°	5mtr Roll	-


DC12V IP 20  CRI>90 PF>0.9

 SDCM <3  Class II  UGR<19 

3000K/6000K



4000K



Product Specifications:

Lamp Type: EPISTAR SMD2835 LED
Operating Temp.: -20°C ~ +40°C
Material: 3M Tape on the back
Finish: White
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:

CCT: 2700K-6000K
Control: Switchable/RIAC/1-10V/DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Lita	16784	1.5W/mtr	3000K	100lm/M	-	120°	5mtr Roll	-

DC12V

IP65



CRI>80


PF>0.9









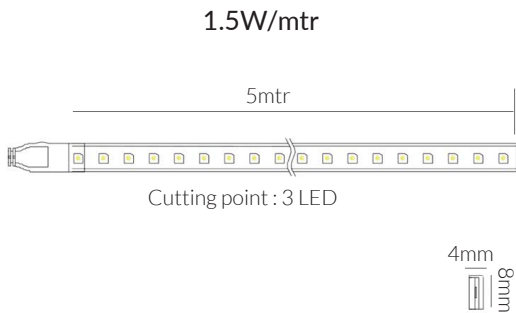



FAJA PRO

DC24V

SYV | Strip Lights

Product Specifications:

Lamp Type: EPISTAR SMD5050/SMD 2216 LED
Operating Temp.: -20°C ~ +40°C
Material: 3M tape on the back/Double Layer PCB
Finish: White
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.







Product Options:

Wattage: 7.2W / 14.4W
CCT: 2700K-6000K
Voltage: DC12V
Control: Switchable/TRIAC/1-10V/DALI/1-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Faja Pro	16422	9.6W/mtr	3000K	1080lm/M	60mA	120°	5mtr Roll	-
	16423	9.6W/mtr	4000K	1200lm/M	60mA	120°	5mtr Roll	-
Faja	15063	4.8W/mtr	4000K	720lm/M	10mA	120°	5mtr Roll	-
	14950	4.8W/mtr	2700K	672lm/M	10mA	120°	5mtr Roll	-

DC24VIP 20120°CRI>80PF>0.9

SDCM <3Class IIIGR<19CE

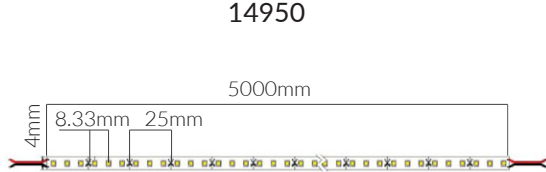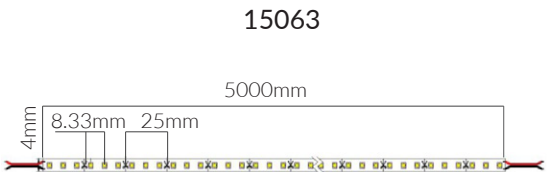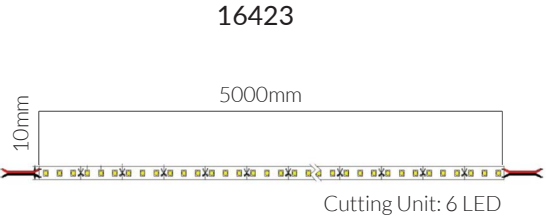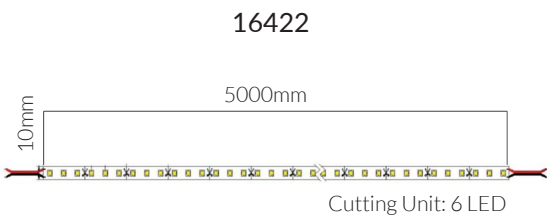

Product Specifications:

Lamp Type: LED
Operating Temp.: -20°C ~ +50°C
Material: Silicon casing
Finish: White
Lifespan: 30,000 Hours
Warranty: 3 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:

CCT: 3000K-6000K
Control: Switchable, TRIAC, 1-10V, Dali, 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Blass	13422	8W/mtr	6000K	800lm/M	-	120°	50mtr Roll	-
	13421	8W/mtr	Blue	720lm/M	-	120°	50mtr Roll	-
	13296	8W/mtr	3000K	720lm/M	-	120°	50mtr Roll	-

AC220-240V IP65





CRI>80

PF>0.9



8W/Mtr

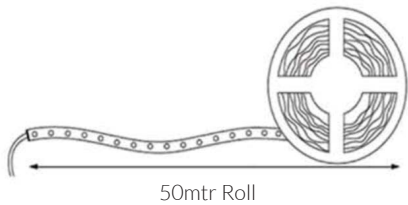



FAKTOR
AC220V

SYV | Strip Lights

Product Specifications:

Lamp Type: 2835 LED
Operating Temp.: -20°C ~ +40°C
Material: Polished white PVC coating with copper wire double line
Finish: Clear
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:

CCT: 2700K-6000K, RGB
Control: TRIAC/1-10V/DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Faktor Pro	15698	10W/mtr	6000K	800lm/M	45.5mA	120°	50mtr Roll 18x8	-
	15531	10W/mtr	3000K	700lm/M	45.5mA	120°	50mtr Roll 18x8	-
	16498	10W/mtr	4000K	750lm/M	45.5mA	120°	50mtr Roll 18x8	-
Faktor Max	20006	9W/mtr	3000K	630lm/M	350mA	120°	50mtr Roll 12x7mm	-

AC220-240V

IP 65

120°

CRI>80

PF>0.9


SDCM <3

Class I


UGR<19



10W/Mtr

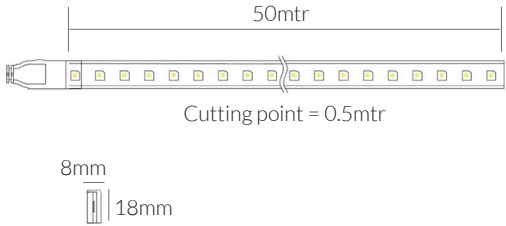

9W/Mtr

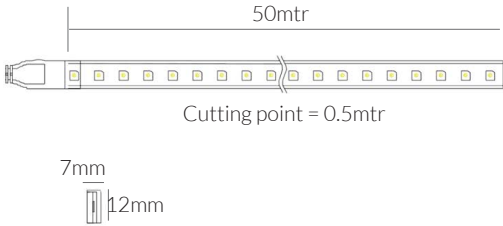

Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +40°C
Material: PVC Coating
Finish: White
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:

CCT: 2700K-6500K
Wattage: 19.2W
Control: TRIAC/1-10V/DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cielo	14741	10W/mtr	3000K	1100lm/M	-	120°	5mtr Roll	-
	15484	14.4W/mtr	3000K	1,008lm/M	40mA	120°	5mtr Roll	-
	14742	8W/mtr	3000K	880lm/M	-	120°	50mtr Roll	-

DC24V


IP66

CRI>80


PF>0.9

Class III

14741/15484

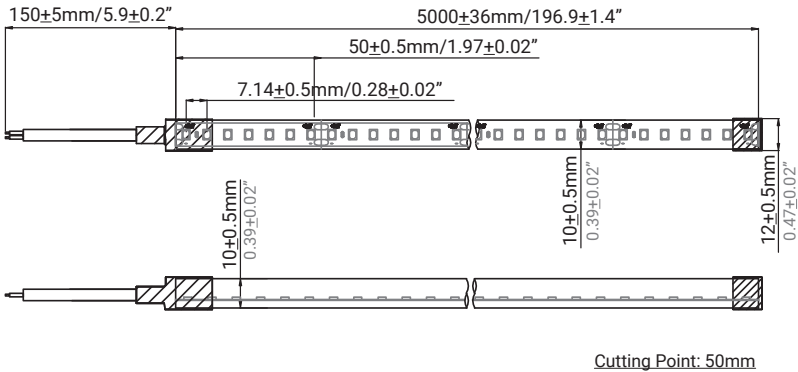

14742

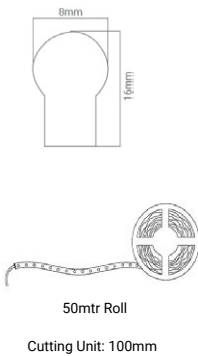

CIELO
DC24V

CABO

DC24V



SYV | Strip Lights

Product Specifications:

Lamp Type: 2835 LED
Operating Temp.: -20°C ~ +40°C
Material: Polished white PVC coating with copper wire double line
Finish: Clear
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:

CCT: 2700K-6000K, RGB
Control: TRIAC/1-10V/DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cabo	15230	4.5W/mtr	3000K	428lm/M	10mA	120°	5mtr Roll	-
	15231	4.5W/mtr	4000K	450m/M	10mA	120°	5mtr Roll	-

DC24V

IP
20

120°

CRI>80


PF>0.9

SDCM <3

Class III

UGR<19



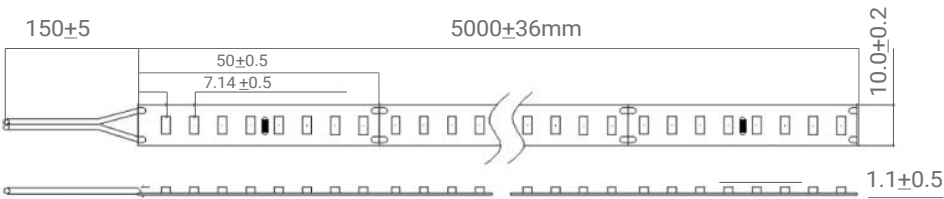

Product Specifications:

Lamp Type: Epistar LED
Operating Temp.: -20°C ~ +40°C
Material: 3M self-adhesive tape on the back
Finish: White
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:

Wattage: 5W / 10W / 15W
CCT: 2700K-6000K
Voltage: DC12V
Control: Switchable/TRIAC/1-10V/DALI/DMX

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cira Max	19454	9W/mtr	3000K	900lm/M	-	180°	5mtr Roll W: 10mm	-
	19455	9W/mtr	4000K	900lm/M	-	180°	5mtr Roll W: 10mm	-
	(IP67) 19788	9W/mtr	3000K	945lm/M	-	180°	5mtr Roll W: 10mm	-



DC24V

IP 20/67

CRI>90

PF>0.9

Class II

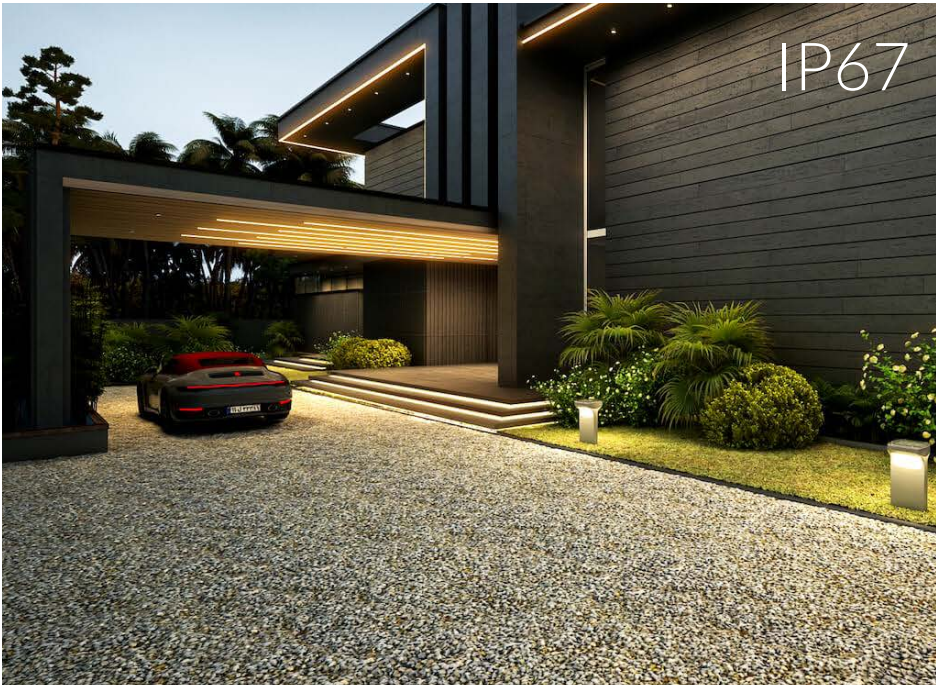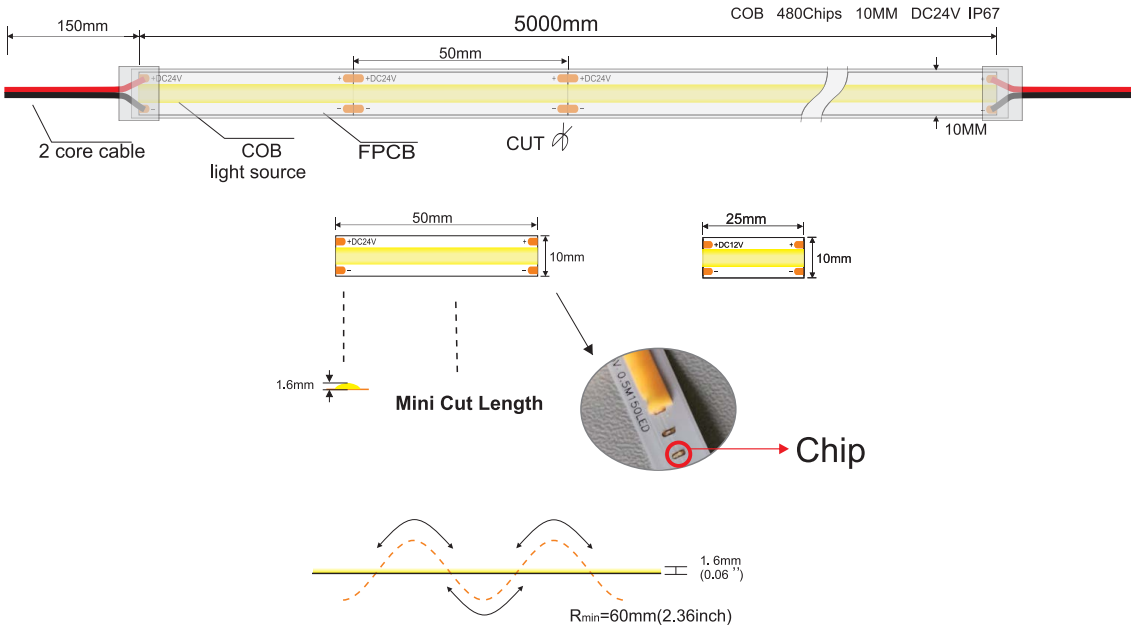

CIRA MAX



VETA

DC24V

SYV | Strip Lights

Product Specifications:


Lamp Type: 2835 LED
Operating Temp.: -20°C ~ +40°C
Material: 3M self-adhesive tape on the back
Finish: White
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:

Wattage:4W/8W/16W/19W
CCT: 2700K-6000K
Voltage: DC12V
Control: TRIAC/1-10V/DALI

				SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)	
Veta				15212	22W/mtr	3000K	3000lm/M	60mA	120°	5mtr Roll	-	
DC24V	IP 20		CRI>80	PF>0.9				 SDCM <3  Class III  UGR<19 				

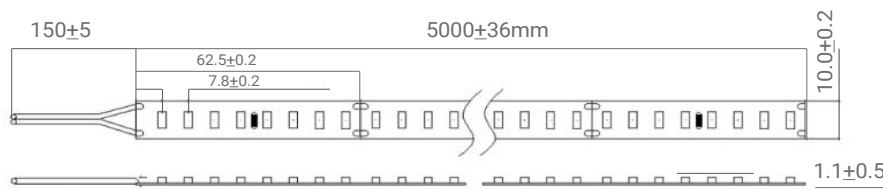



RAYAS

SYV | Strip Lights

Product Specifications:

Lamp Type: 2835 LED
Operating Temp.: -20°C ~ +50°C
Material: Tape + Silicon gel casing
Finish: White
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:

CCT: 2700K-6000K
Control: TRIAC/1-10V/DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Rayas	(DC12V) 14469	9W/mtr	3000K	765lm/M	-	120°	5mtr Roll W: 11.5mm	-
	(DC24V) 18478	9W/mtr	3000K	765m/M	-	120°	5mtr Roll W: 11.5mm	-

DC12V
DC24V

IP
67


120°

CRI>80

PF>0.9



 SDCM <3

 Class III

 UGR<19



9W/mtr

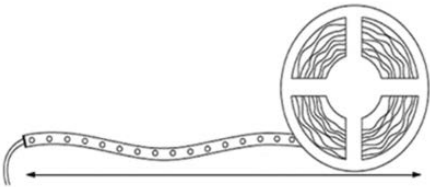

5mtr/Roll
Cutting point: 0.05mm




CAMPOS

FREE CUT

SYV | Strip Lights

Product Specifications:

Lamp Type: Lumileds
Operating Temp.: -25°C ~ +45°C
Material: 3M tape
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



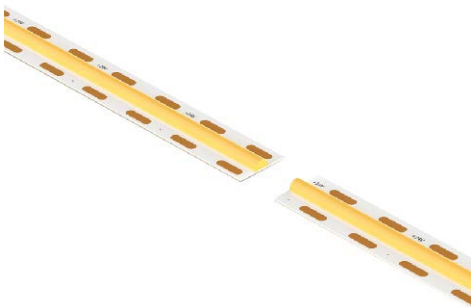


Product Options:

CCT: 2700K-6000K
Control: TRIAC/1-10V/DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Campos (FREE CUT)	19963	15W/mtr	4000K	1500lm	-	180°	15mtr Roll W: 10mm	-

DC24V IP 20 180° CRI>90 PF>0.9 SDCM <3 Class II CE

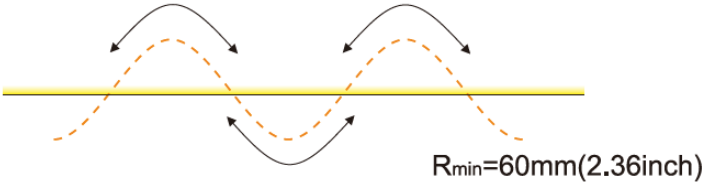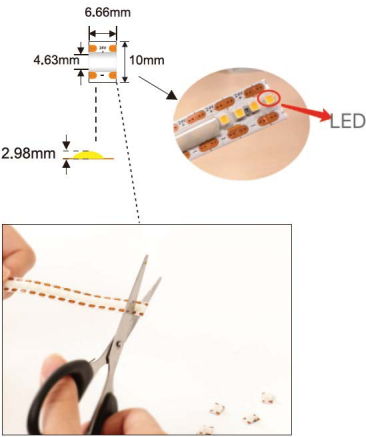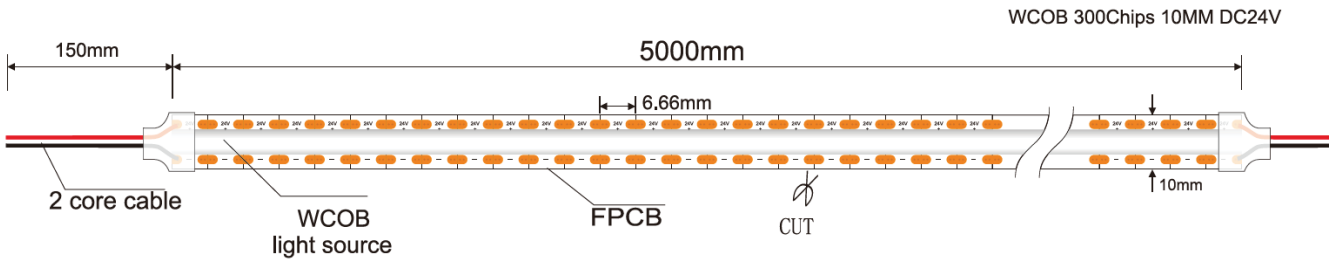

Product Specifications:

Lamp Type: Lumileds
Operating Temp.: -25°C ~ +50°C
Material: Silicone Body
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Neon Flex

Product Options:

WATTAGE: 5W/15W
CCT: 4000K, 6000K, RGBW
Control: TRIAC/1-10V/DALI


	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Oria (DC24V)	19967	9W/mtr	3000K	540lm/M	-	120°	18mtr Roll 16x15mm	-
	19966	9W/mtr	4000K	585lm/M	-	120°	18mtr Roll 16x15mm	-

DC24V

IP 67

CRI>90

PF>0.9

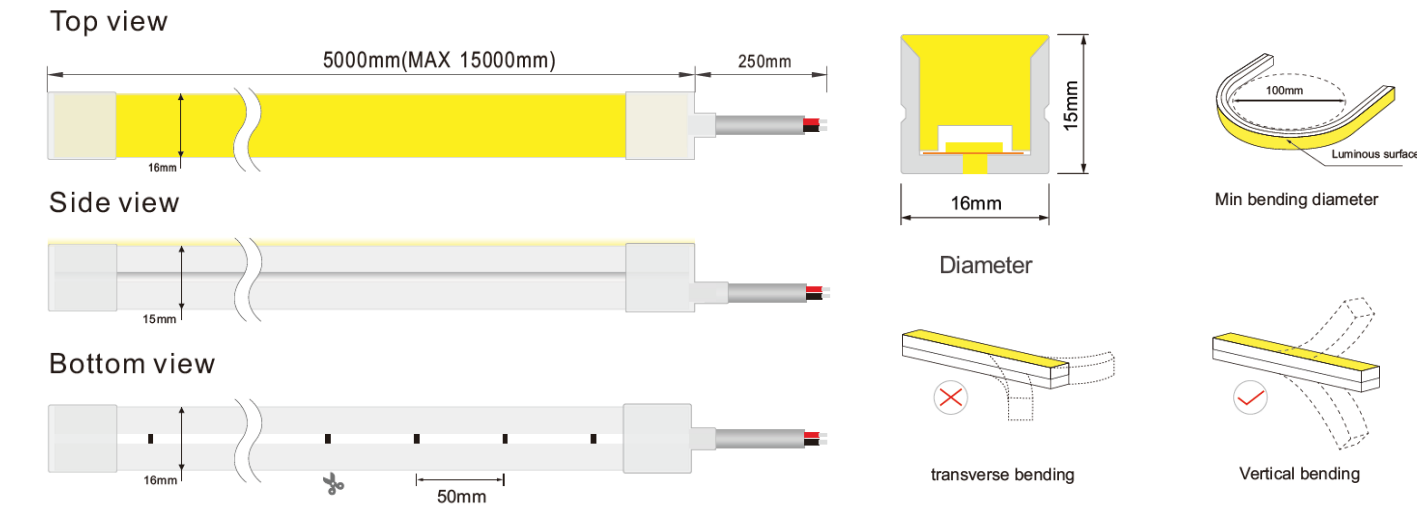

Product Specifications:

Lamp Type: 2835 LED
Operating Temp.: -20°C ~ +50°C
Material: Tape + Silicon gel casing
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Mini Wall Washer

Product Options:

CCT: 2700K-6000K
Control: TRIAC/1-10V/DALI


	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vicar (DC24V)	19973	16W/mtr	3000K	960lm/M	-	30°	5mtr Roll 16x16mm	-
	19974	16W/mtr	4000K	1040lm/M	-	30°	5mtr Roll 16x16mm	-

DC24V

IP 65

CRI>90

PF>0.9

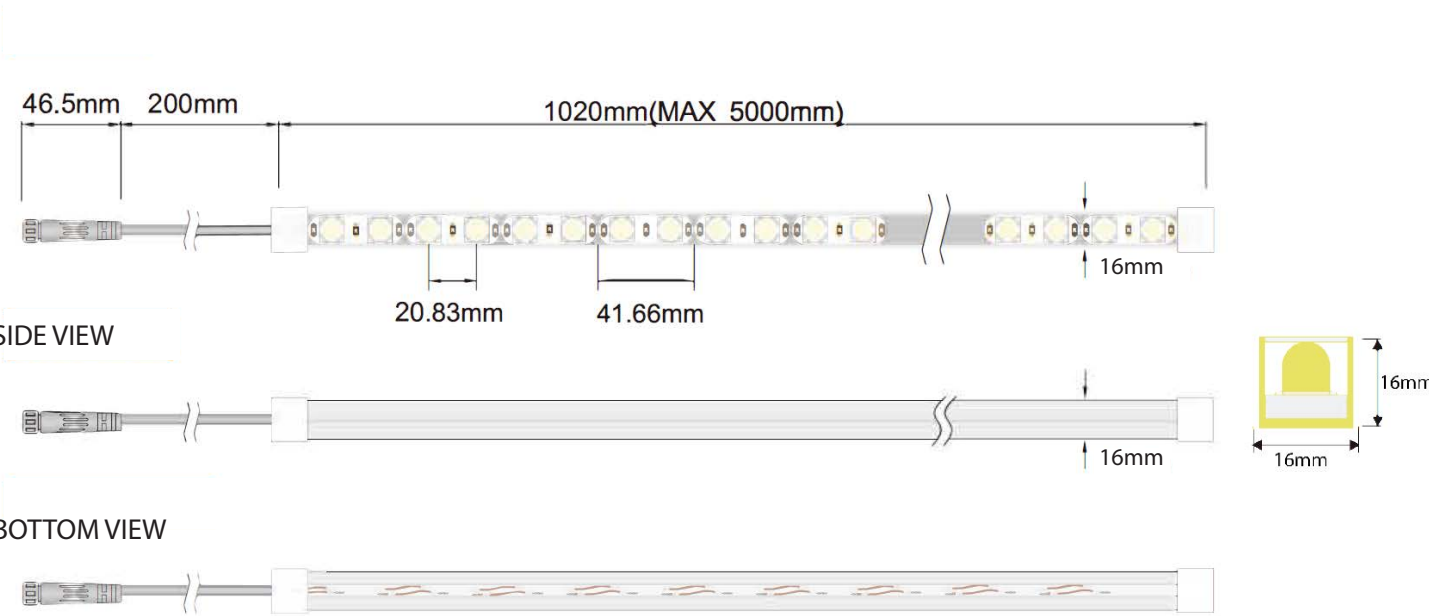

VICAR

MINI WALL WASHER STRIP LIGHT



Product Specifications:

Lamp Type: Lumileds
Operating Temp.: -25°C ~ +50°C
Material: Silicone Body
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Residential, Commercial, Hospitality etc.



Neon Flex

Product Options:

WATTAGE: 5W/15W
CCT: 4000K, 6000K, RGBW
Control: TRIAC/1-10V/DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Fresno (DC24V)	19970	16W/mtr	3000K	960lm/M	-	120°	12mtr Roll 50x25mm	-
	19971	16W/mtr	4000K	1040lm/M	-	120°	12mtr Roll 50x25mm	-

DC24V

IP
67

120°


CRI>90

PF>0.9

SDCM <3

Class II



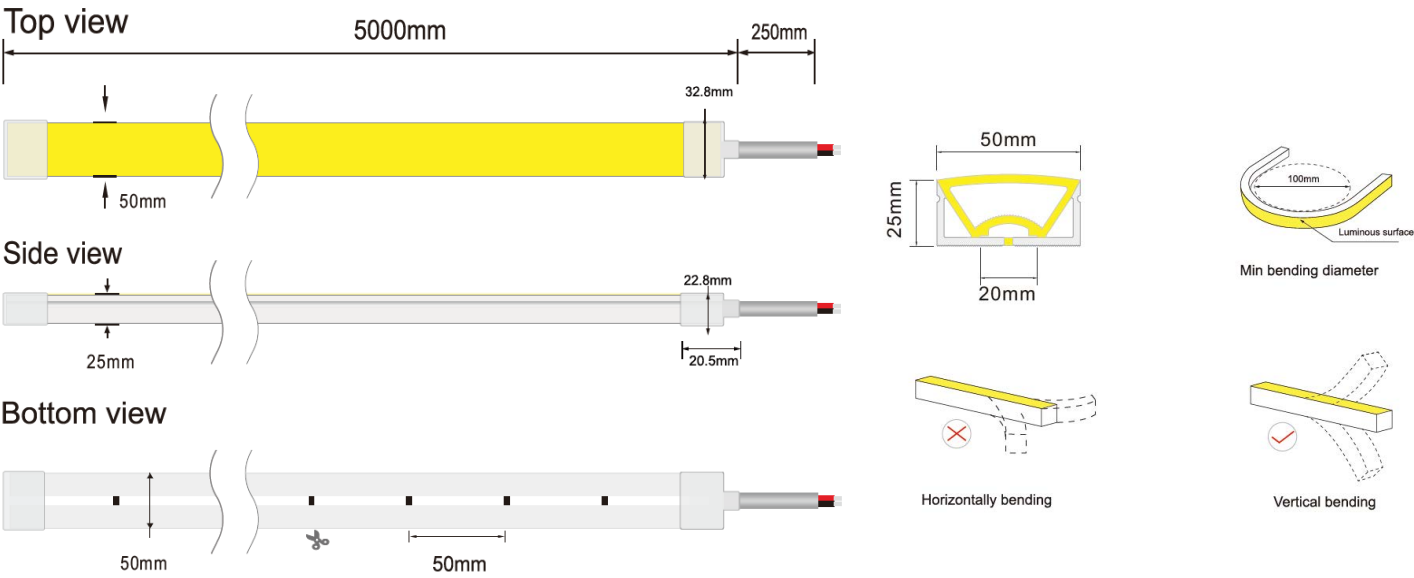

FRESNO
DC24V



Product Specifications:

Lamp Type: Epistar LED
Operating Temp.: -20°C ~ +50°C
Material: Silicone body
Finish: White
Lifespan: 30,000 Hours
Warranty: 3 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:

CCT: 2700K-6000K
Control: TRIAC/1-10V/DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Quero	20008	9W/mtr	3000K	900lm/M	-	120°	50mtr Roll 15x4.3mm	-

AC220-240V

IP 65

120°


CRI>80

PF>0.9

SDCM <3

Class II



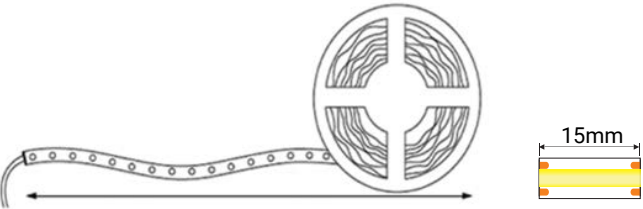

50M/Roll
Cutting Unit: 0.1M

Product Specifications:

Lamp Type: LED
Operating Temp.: -20°C ~ +40°C
Material: Tape on the back+ PU glue
Finish: White
Lifespan: 30,000 Hours
Warranty: 3 Years
Applications: Residential, Commercial, Hospitality etc.



Product Options:

CCT: 3000K-6500K
Control: Switchable, TRIAC, 1-10V, Dali, 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
RGB	12733	14.4W/mtr	RGB	400lm/M	-	120°	5mtr Roll	-

DC12V IP65





CRI>80

PF>0.9



14.4W/mtr



RGB
STRIP LIGHT

Product Specifications:

Lamp Type: LED
Operating Temp.: -20°C ~ +50°C
Material: Tape on the back+ PU glue
Finish: White
Lifespan: 20,000 Hours
Warranty: 2 Years
Applications: Residential, Commercial, Hospitality etc.




Product Options:

CCT: 2700K-6000K
Voltage: DC24V
Control: TRIAC/1-10V/DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cuerda	12731	14.4W/mtr	Blue	400lm/M	-	120°	5mtr Roll	-
	12730	14.4W/mtr	5500k	400lm/M	-	120°	5mtr Roll	-

DC12V IP65 CRI>90 PF>0.9

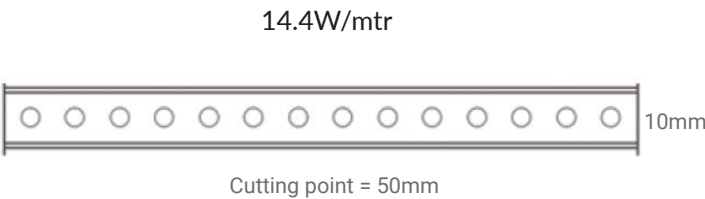

CUERDA
DC12V

Glossary

1-10 V: Analogue lighting management protocol that enables luminaire intensity to be varied by the use of a control device (potentiometer, presence sensor, management system, etc.).

Accent lighting: Localised lighting intended to highlight a particular subject (retail product or architectural feature, for example).

Asymmetric: Light distribution pattern in which the beam is directed to be more intense in a particular desired direction to illuminate a picture or wall.

Average illuminance: Average illuminance measured or calculated within a room at points on a standard grid.

Barn doors: Movable flaps mounted on the floodlight housing for the purpose of directing and concealing the light to suit the specific application.

Beam: All the light rays produced by a source in a given direction.

Binning: The technique used to classify LEDs on the basis of their luminous flux, colour temperature and voltage. All LEDs from the same colour “bin” deliver the same guaranteed quality of light.

Candela (cd): The SI unit of luminous intensity emitted by a point light source in a particular direction.

Candela per square metre (cd/m2): the derived SI unit of luminance.

Cap: The rear part of the lighting source which fits into the socket to provide both electrical connection and mechanical fixing. It is essential to have the right type of socket for the right type of cap.

Ceiling light: A luminaire surface mounted on a ceiling.

Clear: The name given to low translucency or transparent material.

Cold white: A white light tending towards blue, typically with a warm colour temperature of 5000 K or higher.

Colour Rendering Index (CRI): The ability of a light source to render the colours of objects accurately when compared with those produced using a reference source. It ranges from 0 to 100 (ideal white light).

Colour temperature: The apparent colour of light. Colour temperatures below 3500 K are referred to as “warm’ ; the yellow-orange shade deepens as the temperature decreases. Colour temperatures above 5000 K are referred to as “cold’ ; the blue shade deepens as the temperature rises.

Compact fluorescent lamp: The name commonly given to single-cap fluorescent lamps, as opposed to twin-cap fluorescent tubes.

Current: The - usually negative - flow of electrical charge passing through a surface within a unit of time. It is an SI base unit. It is measured in amperes.

DALI: Digital Adressing Lighting Interface. The protocol that enables a signal transmitted by a pair of cables known as a “bus” to control an installation of multiple luminaires. The DALI system makes it possible to address devices within a system individually and receive data for monitoring the correct operation

Diffuse: The property of a surface or material that allows incident light waves to be scattered in all directions. Similar to the effect created by an opalescent material.

Diffuser: A translucent or opalescent optical element with the ability to defuse incident light waves throughout the surrounding space.

Diffusion: In luminaires fitted with devices to conceal the light source from view (diffusion louvres), diffusion is defined as the maximum angle at which the lamp is not visible (relative to the horizontal).

Diffusion louvres: An optical system using steel or aluminium baffles to conceal the light source from view from a predetermined angle (see Diffusion).

Dimmable: A luminaire for which the user can adjust the luminous flux.

Directional: A light source whose beam is directed by a reflector.

Electronic ballast: A power supply using a semiconductor circuit to power fluorescent lamps for instantaneous illumination.

Electrical safety classification: Characterisation of the level of electrical protection provided by an electrical device in respect of human safety. There are three classes of electrical safety (see luminaire specifications).

EMC (Electro Magnetic Compatibility): The ability of a device or system to operate satisfactorily within its electro-magnetic environment without itself generating unwanted electromagnetic interference with the potential to affect or damage other equipment.

ENEC: The European mark for compliance of traditional and LED luminaires with European standards.

Energy efficiency classification (EEI : Energy Efficiency Index): Power consumption classification adopted by Lighting Europe for the ballasts used in fluorescent lamps and tubes, high-pressure sodium lamps and metal halide lamps.

Extensive: The property of a luminous flux to be broad, or the ability of an optical system to widen a luminous flux.

Filter: Optical component that selects all or part of the spectral wavelengths emitted by a light source.

Glossary

Fluorescent lamp: Low-pressure mercury discharge lamp in which the majority of the light is emitted by a layer of fluorescent material excited by the ultraviolet radiation of the discharge.

General lighting: Uniform room lighting that takes no account of specific needs.

Glare: Annoyance or discomfort caused by excessively high light levels or light level contrasts.

GR: See definition of RG.

Hasp: A mechanical device that makes it possible to assemble two parts of a component tool-free using a system of hooks and springs.

Heatsink: A device designed to dissipate the heat generated by a light source.

Hot cathode: The name given to an electronic ballast that preheats the electrodes of a lamp to increase its lifespan.

IK: Classification of mechanical protection that characterises the resistance of enclosures to mechanical impact damage (see luminaire specifications).

Illuminance: Luminous flux per unit area, measured in lux.

Incident lighting: Directional lighting using a very intense beam, particularly effective for lighting surfaces.

Intensive: The property of a luminous flux to be focused, or the ability of an optical system to focus a luminous flux.

IP (Ingress Protection): Classification of ingress protection against solid objects and liquids (see luminaire specifications)

Kelvin (K): The SI unit of thermodynamic temperature. In the context of lighting, it refers to the colour nuances of white light.

LED: Light Emitting Diode. An optoelectronic component with the ability to generate light. The light emitted is a monochromatic point source.

Lens: A transparent optical component shaped to direct light in a specific way : convergent or divergent.

Light level sensor: A sensor that measures the light level at a given point and, when connected to luminaires, adjusts their luminous flux to supplement the level of natural daylight.

Light Mixing Chamber: Structure surrounding the LED source and designed to improve its luminous efficiency, limit indirect luminous flux and eliminate faults caused by shaded areas and internal reflections within the

Lighting uniformity: The ratio between the lowest illuminated area and the average illuminated area within a given room or space. This ratio is important in determining the level of visual comfort.

Looping: A wiring technique that consists of creating a junction on a two-stage connector inside the luminaire to avoid the need for a junction box.

Lumen (lm): The SI derived unit of luminous flux, which provides a measure of the total quantity of visible light emitted by a light source or luminaire.

Luminance: Quantity defined as luminous flux divided by the apparent surface of the light source. This quantity is the only one perceptible by humans, and is used to measure glare. It is measured in candelas per m2 (cd/m²).

Luminosity: The subjective expression of a visual sensation describing whether a surface appears to emit more or less light.

Luminous efficiency: In the context of lighting, this term refers to the ratio between the luminous flux emitted and the power consumed. It is expressed in lumens per watt (lm/W).

Luminous flux: The quantity of light emitted by a source in one second in all directions. It is measured in lumens (lm).

Luminous intensity: The photometric quantity that expresses the luminous power of a light source. It is an SI base unit. It is used to define the luminosity of a point light source in a given direction. It is measured in candelas (cd).

Lux (lx): a measure of the illuminance of a uniformly lit surface receiving a luminous flux of one lumen per square metre. In practice, this value is used to characterise the quantity of light in a space or falling on a surface.

Lux meter: Device used to measure illuminance.

MacAdam ellipse: The elliptical area within the CIE 1931 chromaticity diagram in which the colour located at the centre of the ellipse cannot be distinguished from all other colours contained within the ellipse (visual colorimetric confusion zone). The size of the ellipse delimits the zone within which a colour may vary, either in its initial state or steady state : the smaller the size (MacAdam Ellipse 3, for example - see SDCM), the narrower the chromatic tolerance.

Metal halide lamp: A lamp in which the light is produced directly or indirectly by means of an electric discharge in a gas, metal vapour or combination of several gases or vapours.

Mirror finish: A surface with very significant optical reflection properties that create a “mirror” effect.

Glossary

Mood lighting: Low-intensity lighting that creates a soft or gentle mood in a room or building.

Movement sensor: A sensor that generates an electrical impulse when movement occurs within its detection zone.

Neutral white: A white light with a colour temperature of between 3500 and 5000K.

Optical yield: The percentage ratio between the luminous flux on leaving the device and the flux emitted by the light source.

Passage lighting: Lighting flanking a regularly-used pedestrian route to light transition areas between sections of a route.

Photobiological risk: The potential of light to harm the human eye (see luminaire specifications)

Photometrics: From the Greek “PHOTÒS” (light) and “METRIA” (measurement). The field of physics that measures quantities related to visible light.

Potentiometer: Variable resistance used in lighting to vary the voltage in order to control dimming in accordance with the 1-10 V principle.

Power supply: Device used to convert mains power to provide light sources with appropriate voltage and current. The term “ballast” is used for fluorescent lamps, and “driver” for LEDs.

Protocol: A standardised language that enables individual connected devices to communicate, e.g. via the Ethernet, IP, DALI or DMX protocols.

Push-button: Also referred to as “switch control”, this simple control system enables the dimming of lighting to be controlled from a single push-button switch. (See lighting management)

Reflection: A physical property describing what happens when incident waves interfere with the surface and return through their original medium.

Reflection coefficient: The property of a surface defined by the ratio of the amplitude of the reflected wave to the incident wave.

Reflector: An optical system that reflects light and is usually made from aluminium. There are many different types, including asymmetrical/symmetrical and intensive/extensive.

RG: The degree of glare produced by an outdoor lighting installation as experienced from a given observation point. Previously referred to as the GR (Glare Rating), it is defined by the IEC 112-1994 standard and can be calculated in precise circumstances, but unlike the concept of UGR used for indoor lighting, is impossible to calculate a standard value for a given luminaire without taking account of the complete installation.

Satin finish: This term describes a surface between mirror and matt finishes, i.e. a surface with both specular and diffuse reflection properties. It also refers to a homogeneous non-opaque material with a white (often milky) appearance.

SDCM (Standard Deviation Colour Matching): An indicator used to measure the size of MacAdam ellipses, and therefore the zone in which a colour may vary. The lower the figure (SDCM 3, for example), the narrower the chromatic tolerance. Values generally fall between 1and 8.

Signage lighting: Very low-power lighting which is not intended to illuminate, but rather to provide indications or backlight a translucent film.

Socket: Plastic, metal or ceramic component located at the extremity of the electrical circuit to house the lamp cap. It is essential to have the right type of socket for the right type of cap.

T5 tube: 16 mm diameter linear fluorescent lamp offered in a broad range of power ratings.

Terminal: A mechanical component installed on a fixed surface for the purpose of making electrical connections, typically for the connection of an electrical device to mains power (230 V/50 Hz).

Transmission coefficient: The property of a material defined by the amplitude of the transmitted wave divided by the amplitude of the incident wave.

Tray: Metal component used to hold all the internal components of a luminaire.

UGR (Unified Glare Rating): Based on calculation of the luminance values emitted by a lighting unit, this parameter expresses the direct glare generated by the unit itself within an indoor installation.

Visual field: Of the eye or eyes. The total area in which objects can be seen in the side (peripheral) vision as you focus your eyes on a central point. The visual field may be monocular or binocular.

Wall light: A luminaire installed on a vertical surface (e.g. wall). The wall light itself may be installed horizontally or vertically.

Warm white: A white light tending towards orangey yellow, typically with a warm colour temperature of 3500K or lower.

Zhaga: An international consortium of lighting companies, which prepares industry standard specifications to ensure the interchangeability of LEDs produced by different manufacturers.

Lighting designed to enhance the way
you live, work, dine, and unwind.

WWW.SYV-ES.COM

