

# Outdoor Collection

Outdoor lighting designed to enhance  
how you relax and entertain.


# design to match function

Our products are designed in line with our innovative technology. State of the art architecture requires luminaires that enhance the space from both a technical and design perspective.

Our products are manufactured in Hongkong and are checked repeatedly, from the receipt of raw materials through to the processing, assembly and prototype stages. Our goal is to supply you with the very best lighting equipment offering the latest in technological developments.

Our range of indoor luminaires embraces a wide spectrum of different lighting tools: spotlights and downlights, track and light structures, ceiling lights, recessed lights and linear lights. They all share a common guiding design principle of efficient visual comfort.

Our understanding of light extends across residential, offices, hospitality, education, retail and public spaces. We are a trusted supplier to our renowned customers like EMAAR, ETISALAT, ADIB, Sharjah Municipality and many more. We begin with planning aspect of a project to supply and installation. Our team works with many different stakeholders to exceed design and performance expectations. We work in collaboration with you to be a trusted lighting partner.

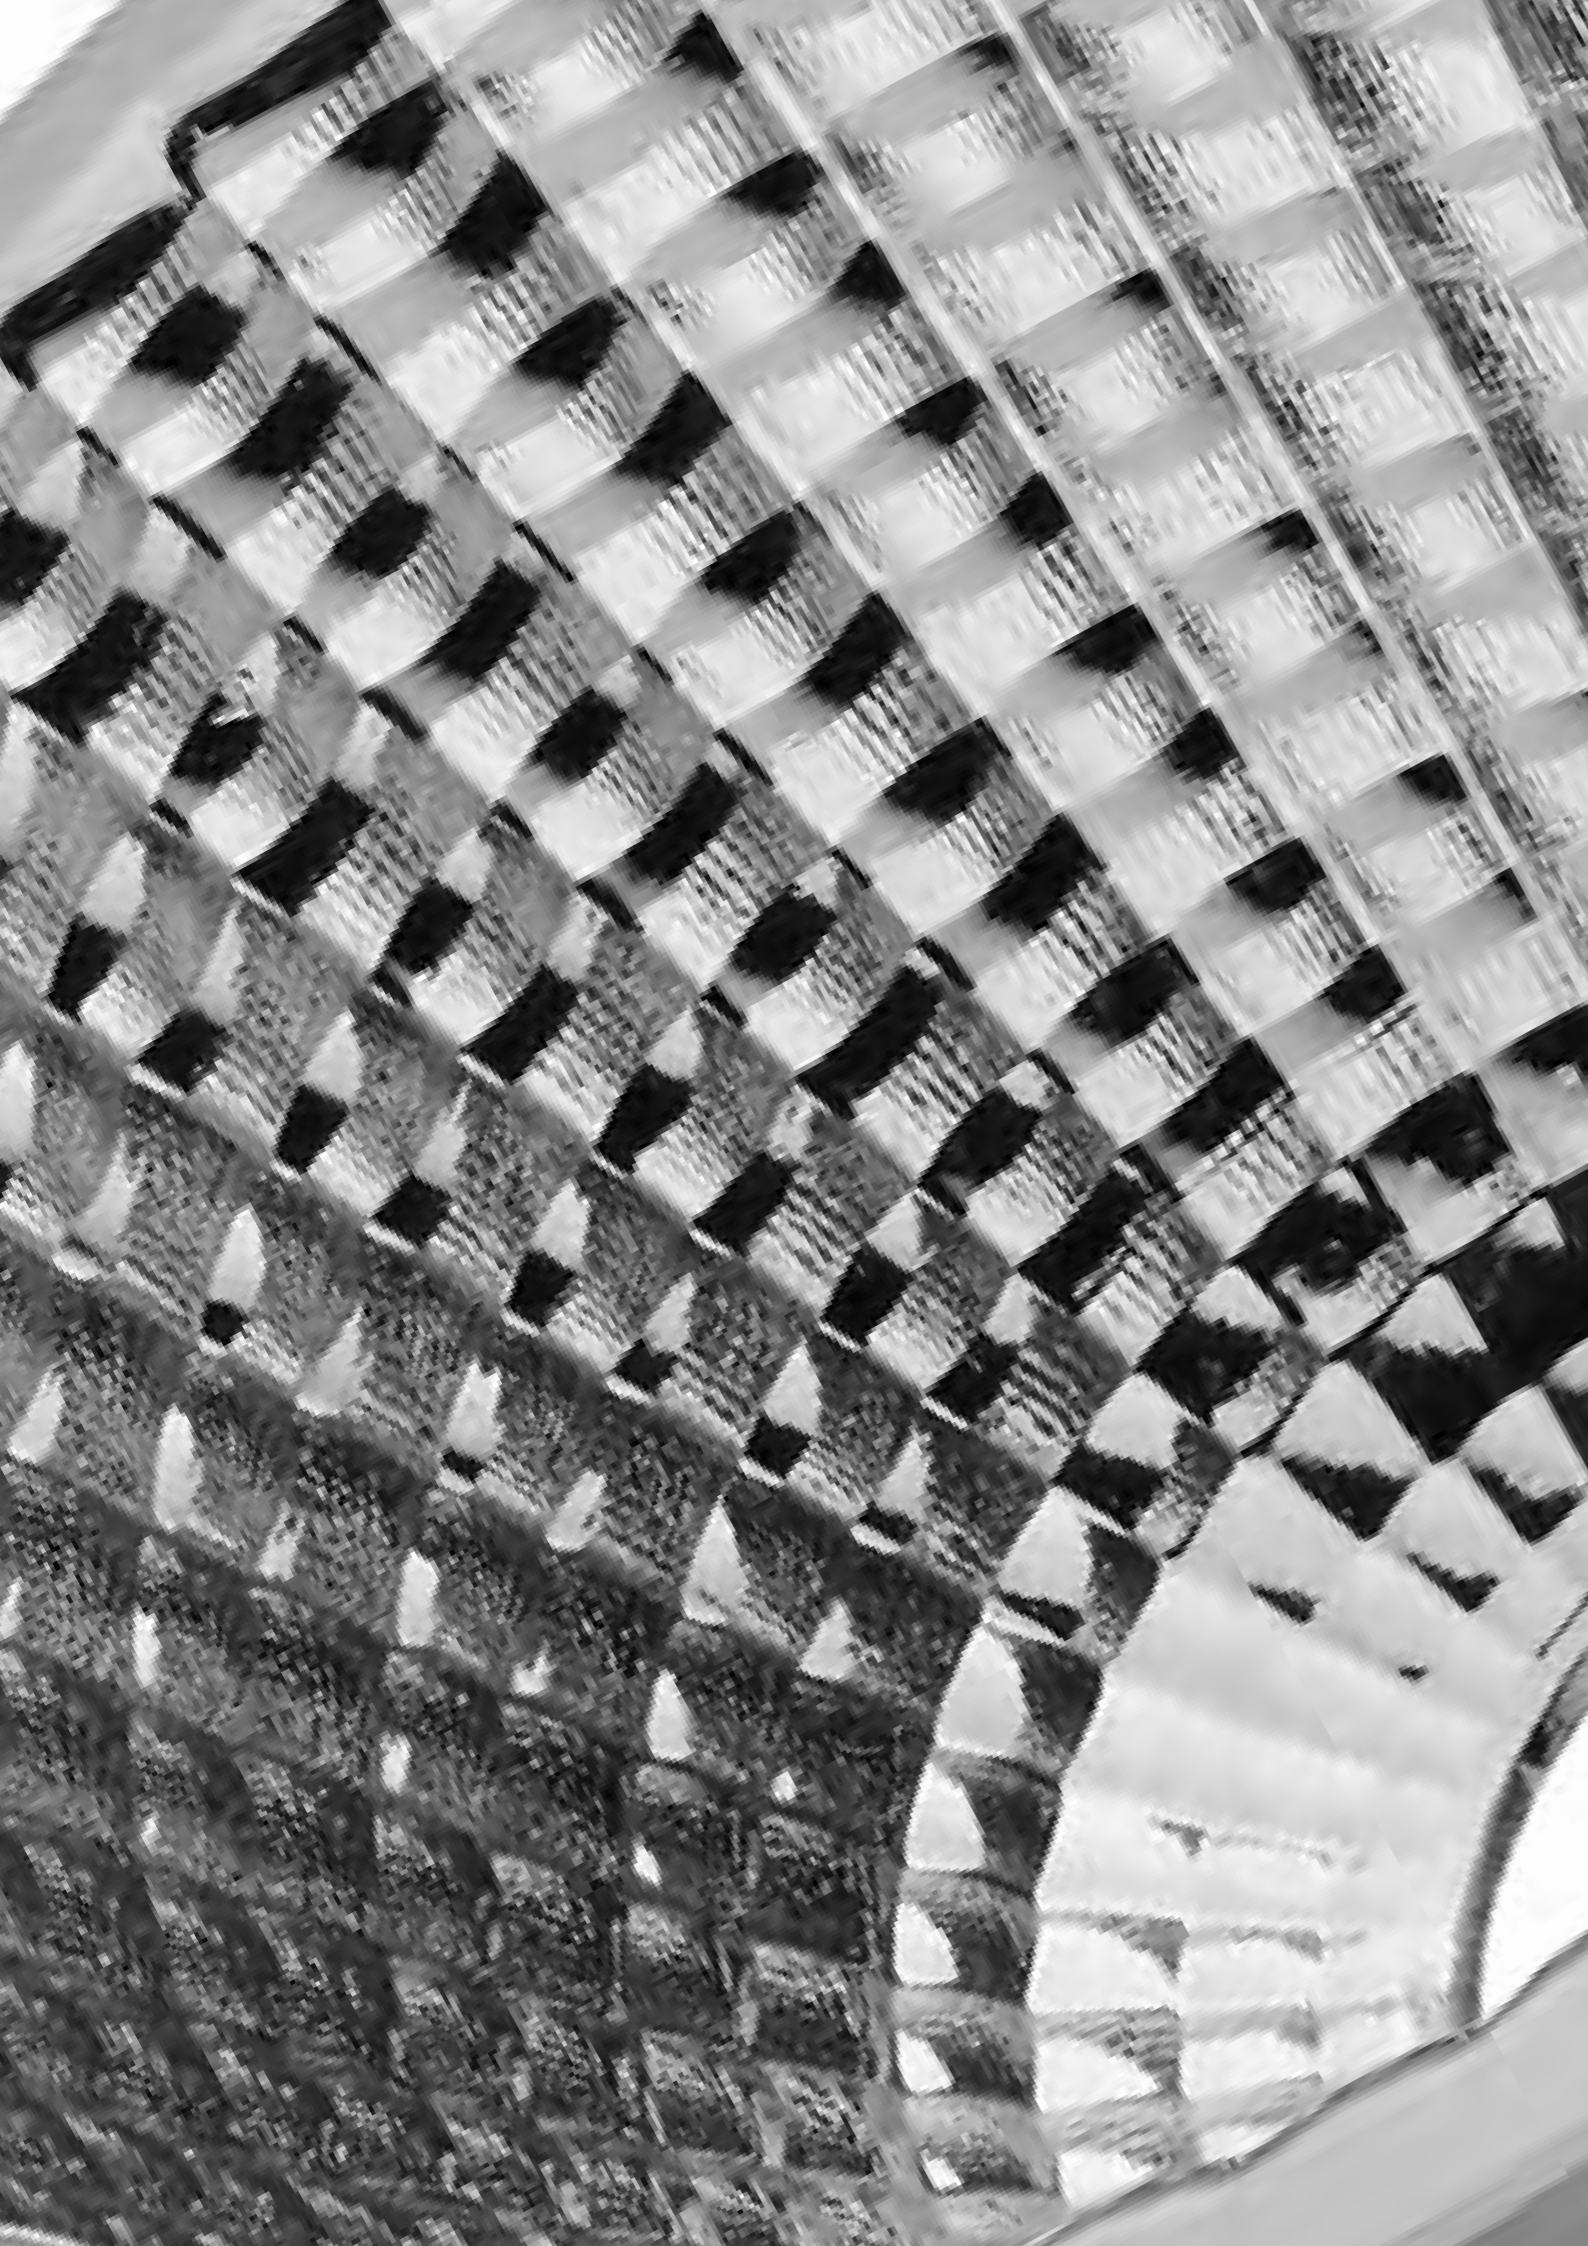

# design & development

Reliable engineering, material quality and technologically advanced optical solutions, together with constant research to devise refined, shapes and lines, are the assets that SYV draws upon to create and offer cuttingedge products combining technology and aesthetic appeal.

# lighting design

SYV offers to its customers a lighting design service through its skilled engineers and the lighting design software DIALUX and AGI32. By supplying CAD plans of the areas for which lighting design is requested, our department will be pleased to recommend the most suitable luminaires and installations. Upgrades of the photometric archives can be downloaded free of charge from our website or supplied upon request.

# Sustainable & Energy Efficient Lighting




## Save AED on your lighting

LED lighting can reduce your lighting energy output by up to 86%. Combined with the lights and professional installation, this equals substantial savings.



## It's a low-cost carbon cutting upgrade for your business

It is most effective and viable solution to reduce your carbon footprint in particular in existing buildings.



## Use LED lighting to cut your carbon footprint & reduce your light costs

Use LED lighting to cut your carbon footprint.



## Save time & money replacing blown globes

LED lights can last up to 10 Years so your business don't have to waste your time & effort replacing blown halogen globes.

## Specifications

### Ingress Protection (IP)

The IP rating refers to the degree of protection provided by electrical equipment enclosures against the ingress of solid objects and liquids in accordance with EN 60529.

IP X Y

X	Protection against the ingress of solid objects	X	Protection against the ingress of liquids
0	No protection	0	No protection
1	≥ 50 mm diameter	1	Vertically falling drops of water
2	≥ 12.5 mm diameter	2	Direct sprays of water up to 15° from vertical
3	≥ 2.5 mm diameter	3	Direct sprays of water up to 60° from vertical (rain)
4	≥ 1.0 mm diameter	4	Water splashed from all directions
5	Protected against dust (no harmful deposit)	5	Low-pressure water jets from all directions
6	Totally protected against dust	6	High-pressure water jets or heavy seas
		7	Temporary immersion
		8	Prolonged immersion at a depth specified by the manufacturer
		9K	High-pressure steam/water jet cleaning

SYV luminaires are rated :

- IP65 for floodlights
- IP66, 68 and 69K for tubular luminaire

The following tests have been conducted under laboratory conditions in accordance with ISO 20653. Materials and design choices are optimised to maintain this level of ingress protection throughout the life of the luminaire.

The following tests have been conducted under laboratory conditions in accordance with ISO 20653. Materials and design choices are optimised to maintain this level of ingress protection throughout the life of the luminaire.

Rating	Test Procedure
IP65	Spraying the enclosure from all practicable directions with a stream of water from a standard-compliant test nozzle <ul style="list-style-type: none"> <li>• Test duration : 3 minutes</li> <li>• Flow rate : 12.5 l/min</li> <li>• Distance between the nozzle and enclosure surface : 2.5 m - 3 m</li> <li>• Pressure : 30 kPa</li> </ul>
IP66	Spraying the enclosure from all practicable directions with a stream of water from a standard-compliant test nozzle <ul style="list-style-type: none"> <li>• Test duration : 3 minutes</li> <li>• Flow rate : 100 l/min</li> <li>• Distance between the nozzle and enclosure surface : 2.5 m - 3 m</li> </ul>
IP68	Immersion of the luminaire in cold water <ul style="list-style-type: none"> <li>• Immersion of the luminaire at a depth of 4 m (0.4 Bar)</li> <li>• The luminaire is switched on for 1 hour before commencement of the test</li> <li>• The luminaire is switched off during the test</li> <li>• Immersion duration : 1 hour</li> </ul>
IP69K	Spraying the enclosure with a high-pressure jet of hot water to reproduce food industry cleaning conditions. <ul style="list-style-type: none"> <li>• Test duration : 2,5 minutes</li> <li>• Flow rate : 15 l/min</li> <li>• Distance between the nozzle and enclosure surface : 100 and 150 mm</li> <li>• Pressure : 10000 kPa</li> <li>• Water temperature : 80 °C</li> </ul>

### Impact resistance (IK)

Luminaires from the SYV indoor lighting range are rated IK07 (floodlights) and IK10 (all other products). The following tests have been conducted under laboratory conditions in accordance with EN 62 262. Materials and design choices are optimised to maintain this level of impact resistance throughout the life of the luminaire.




The ingress protection levels of our luminaires remain intact following mechanical impact, as long as this remains below the impact energy guaranteed by the IK rating.

XX	Protection against the ingress of solid objects
00	No protection
01	Impacts of 0.14 joules impact energy (the energy of a 14 g weight falling 1 m) ≥ 12.5 mm diameter
02	Impacts of 0.2 joules impact energy (the energy of a 20 g weight falling 1 m)
03	Impacts of 0.35 joules impact energy (the energy of a 35 g weight falling 1 m)
04	Impacts of 0.5 joules impact energy (the energy of a 50 g weight falling 1 m)
05	Impacts of 0.7 joules impact energy (the energy of a 70 g weight falling 1 m)
06	Impacts of 1 joules impact energy (the energy of a 100 g weight falling 1 m)
07	Impacts of 2 joules impact energy (the energy of a 200 g weight falling 1 m)
08	Impacts of 5 joules impact energy (the energy of a 500 g weight falling 1 m)
09	Impacts of 10 joules impact energy (the energy of a 1 kg weight falling 1 m)
10	Impacts of 20 joules impact energy (the energy of a 2 kg weight falling 1 m)

### Electrical safety classification

The electrical safety classification defines a level of electrical protection for the user as the basis for measuring the potential risk of a person coming into contact with mains voltage (230 V AC) or any other voltage hazardous to humans (above 50 V in dry surroundings).

SYV luminaires comply with electrical safety classes I, II and III in accordance with EN 60598-1.

Class	Protection	Symbol
Class I	Equipment that is electrically insulated and provided with a connection to earth to protect exposed metal parts that could become live accidentally	
Class II	Equipment that has double or reinforced insulation of its active components (functional and physical insulation) with no earthing of metal parts	
Class III	Operation at very low voltage (< 50 V)	

### Fire resistance

The glow wire test is governed by the IEC 60695-2-10 standard, and is applied to determine whether the luminaire installed in a building could potentially burn and, more importantly, could contribute to the spread of fire. The diffusers fitted to luminaires from the Sammode indoor range pass the glow wire test at a temperature of 650 °C. The borosilicate protective glass and metal luminaire components are deemed non-flammable.

The test consists of applying a wire heated to a fixed temperature (650 °C, 850 °C, 960 °C, etc.) for a fixed period (5 or 30 seconds, for example) and examining the behaviour of the luminaire housing, especially if it catches fire.

Inground lights



Astría | 018



Tira | 019



Tumo | 021



Hana | 022



Mio | 024



Gil | 025



Cada | 027



Granco | 028



Trado | 031



Quara | 033

Wall lights



Eakarea | 037



Unter | 037



Ganz | 038



Halber | 038




Elvio | 040



Alfio | 041



Aloria | 044



Pamplona | 045



Coruna | 046



Alwar | 048



Arlet | 049



Enire | 052



Zimal | 052



Luz | 053



Ojo | 055



Reja | 057

Wall lights



Verja | 059



Jarra | 060



Canyon | 061



Matia | 061



Warfel | 063



Lavare | 066



Luna | 067



Mirar | 068



Techar | 069



Vara | 070



Tello | 072



Johan | 072



Riva | 074




Dobulet | 075

Step lights



Grado | 080



Dentro X | 081



Vito | 084



Ruto | 085



Velor | 086



Elvas | 089




Kiko | 090



Bermeo | 093



Glor | 095



Cario | 097



Jerez | 098



Vera | 100

Step lights



Adra | 101



Elda | 103



Vic | 104



Coria | 107

Bollard lights



Ario | 146



Anxo | 147



Ocata | 150



Jacin | 151

Ceiling lights



Teja | 111



Agua | 113



Domo | 114



Ace | 117



Kugel | 118



Cofa | 119



Arnel | 121



Quadret | 123



Faro | 126



Almora | 128



Pezzo | 153



Petto | 154



Melzo | 157



Canyon | 159



Felix | 159



Gordo | 161



Felipe | 162



Invitar | 164



Noray | 165



Jarra | 167



Poste | 169



Torcha | 170



Warfel | 172

Compound lights



Vida | 132



Felix | 133



Canyon | 134



Warfel | 136



Jarra | 138



Pezzo | 139



Petto | 140

Spike lights



Teo | 175



Elmo | 178



Kevin | 179



Speren | 181



Eolo | 181



Corzo | 183



Garzon | 184



Stano | 186

Spike lights /  
Tree-ring  
lights



Clavo | 190



Árboles | 195



Kevin | 196

Underwater  
lights



Modo | 199



Ello | 202



Ela | 203



Zona | 207



Miizar | 208



Franco | 209



Maximo | 210

Wallwasher  
lights



Luvio | 213



Verso | 216



Selina | 217



Minas | 219



Agora | 220



Elisa | 223



Juno | 226



Gina | 227

Flood lights



Ewo | 232



Lunio | 235



Cedro | 236



Pandora | 241

Flood lights



Spartan | 242



Nexo | 244



Enyo | 246



Piatto | 247

Area Post-  
Top lights



Invitar | 252



Mecho | 253



Alan | 255



Britto | 256



Lucio | 257

Street lights



Liceo | 261



Jabo | 265




# Safety and Testing Measures

A well-developed inspection process is implemented for both raw materials and finished lights. This involves not just the use of advanced testing instruments but also adherence to established protocols and the expertise of technicians with years of experience in this field.



Utilizing state-of-the-art CNC and die casting processing machines and technologies, we create lighting fixtures with exquisite craftsmanship, offering flexibility in customized services.

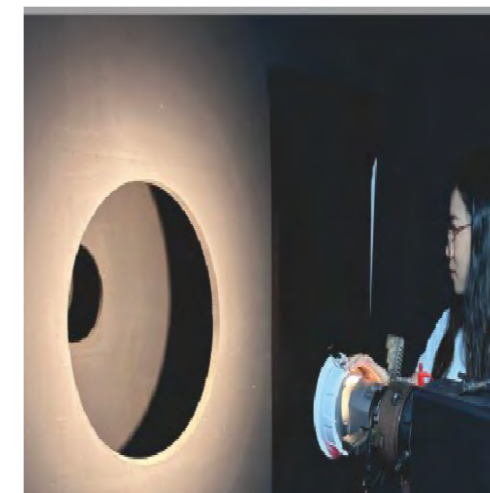


We possess patents and proprietary tooling modules for all our manufactured products, guaranteeing sustained and stable long-term after-sales service for our customers.



Within the company's testing and inspection apparatus, we have systems for testing photometric, colorimetric, and electrical parameters. Additionally, we conduct waterproof tests such as IPX5, IPX6, IPX7, and IPXB. Other equipment includes a goniophotometer, a constant temperature or humidity incubator, a corrosion testing machine, a cryogenic storage



A comprehensive system for ensuring product quality, coupled with the capability for autonomous research and development of new lights.

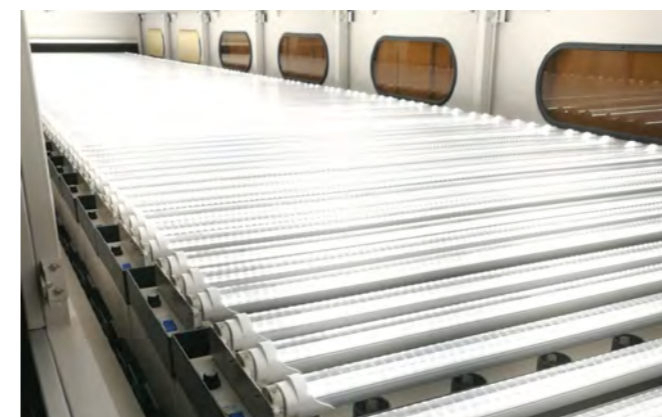



**IN-GROUND**



# ASTRIA

SYV | Outdoor Inground

## Product Specifications:

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Stainless Steel #316  
 Finish: Satin 316 Stainless Steel  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Driveways, Walkways, Pathways

Load Capacity: 300~500 Kilos  
 Voltage: 18V DC with 2M of power cable



## Product Options:


Wattage: 1W  
 CCT: 3000K - 6000K  
 Beam Angle: 15° / 25° / 60°  
 Finish: Matt Black  
 Control: DALI / DMX / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Astria	17476	7W	3000K	750lm	350mA	38°	Ø79x75	Ø65
	18102	3W	3000K	270lm	700mA	15°	Ø52x48	Ø40

DC 18V IP 67  CRI>80


   

### 7W

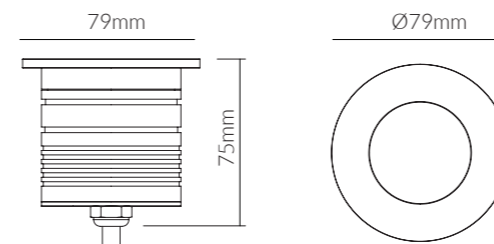

Cutout: Ø65mm

### 3W

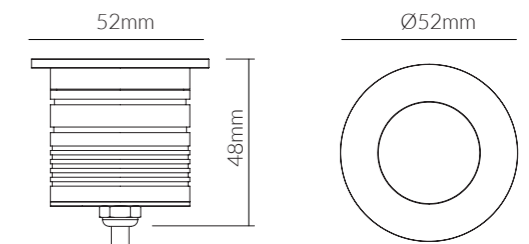

Cutout: Ø40mm

**Product Specifications:**

Lamp Type: CREE LED  
 Driver: Meanwell Driver  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminum  
 Diffuser: Clear Glass  
 Finish: Chrome  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



**Product Options:**

Wattage: 3W  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Tira R</b>	12929	1W	3000K	90lm	350mA	24°	Ø40x95	Ø32
	16370	1W	4000K	95lm	350mA	24°	Ø40x95	Ø32
	16371	1W	6000K	100lm	350mA	24°	Ø40x95	Ø32
<b>Tira S</b>	12930	1W	3000K	90lm	350mA	24°	Ø40x95	Ø32
	16372	1W	4000K	95lm	350mA	24°	Ø40x95	Ø32
	16373	1W	6000K	100lm	350mA	24°	Ø40x95	Ø32

AC220-240V IP65 CRI>80

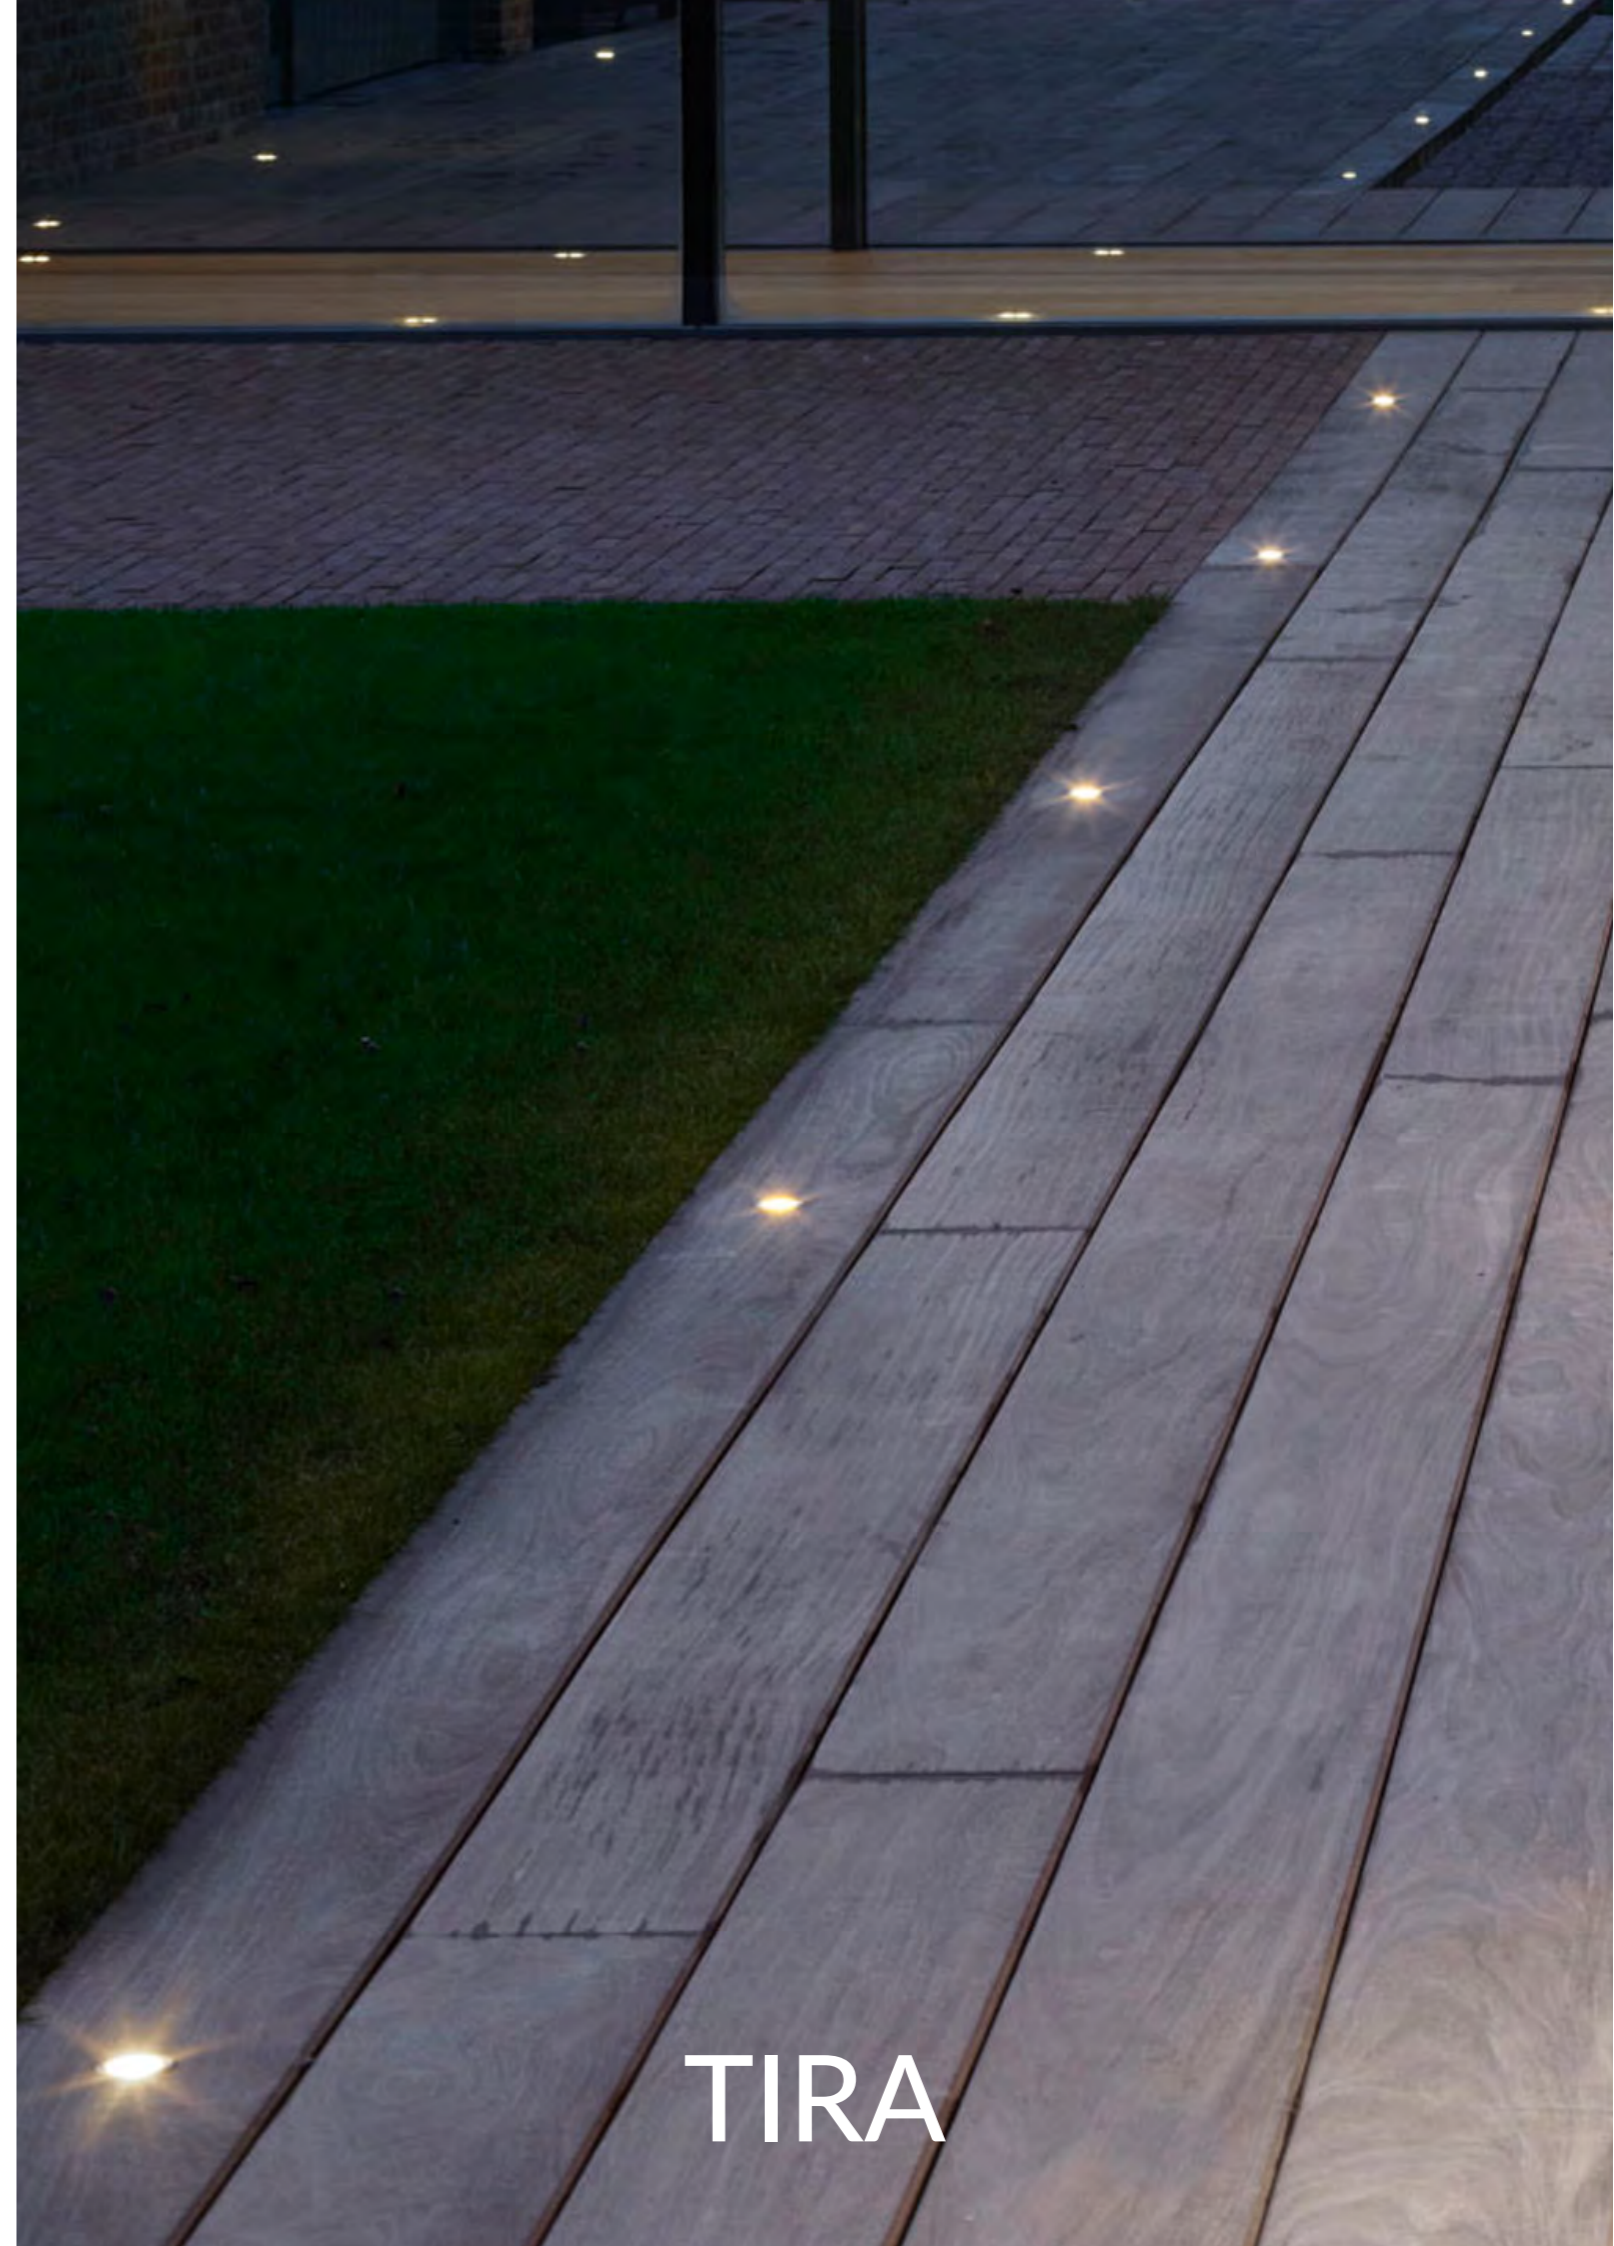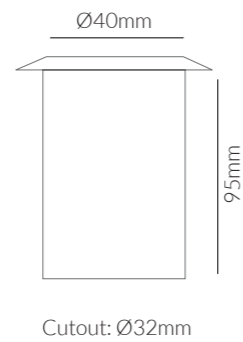

**TIRA**

**Product Specifications:**

Lamp Type: GU10  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium body+ Stainless steel cover  
 Finish: Chrome  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality

Load Capacity: 500 Kilos



Tumo R




Tumo S

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Tumo R</b>	12923	-	-	-	-	-	Ø105x120	Ø32
<b>Tumo S</b>	12924	-	-	-	-	-	Ø105x120	Ø32

IP 65

SDCM <3 Class I IK06 CE

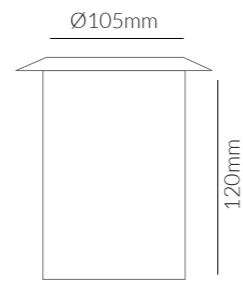

Cutout: Ø-

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminum+stainless steel #316  
 Finish: Chrome  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Driveways, Walkways, Pathways

Output Voltage: 2-4V

**Product Options:**


Wattage: 3W / 7W  
 CCT: 3000K - 6000K, RGB  
 Beam Angle: 10° / 38°  
 Control: Switchable / DALI / 1-10V / Triac  
 Accessories: Honeycomb louver/Half shading



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Hana</b>	19092	2W	3000K	200lm	60mA	25°	Ø38x85	Ø36

AC220-240V IP 67 CRI>80

SDCM <3 Class I IK06 CE

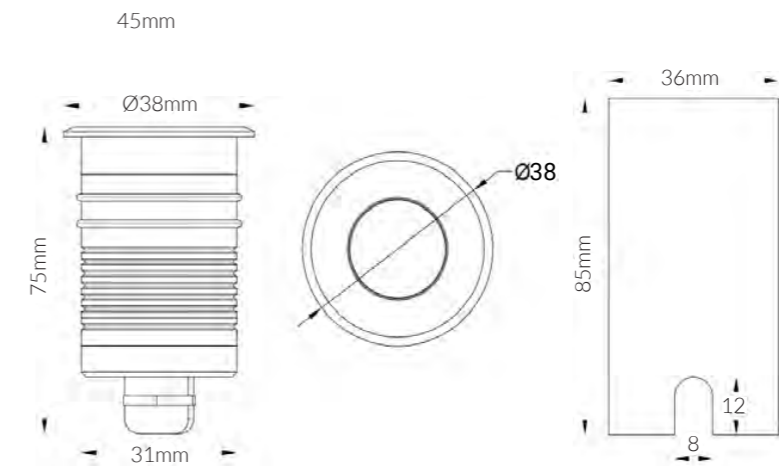



**MIO**  
DC24V

SYV | Outdoor Inground

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: SS316 front cover  
 Finish: Matt Silver Anodized  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Driveways, Walkways, Pathways



2 - way Light


**Product Options:**

Wattage: 3W / 5W  
 CCT: 3000K - 6000K  
 Finish: Matt Black  
 Control: Switchable / DALI / 1-10V / Triac

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Mio	18508	1W	3000K	90lm	350mA	Asymmetric	Ø64x102	Ø51

DC 24V IP 67  CRI>80

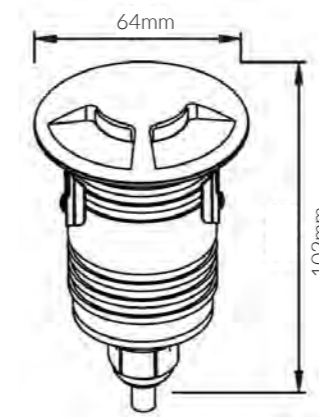


Cutout: Ø51mm

**Product Specifications:**


Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminum body  
 Diffuser: Tempered Glass  
 Finish: Silver  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Walkways, Pathways, etc

**Product Options:**

Wattage: 3W, 4W, 5W, 8W, 10W  
 CCT: 3000LK - 6000K, RGB  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI



1-Way



2-Way





4-Way

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Gil</b>	(1 way) 19564	1W	3000K	80lm	250mA	60°	Ø48x59	Ø31
	(1 way) 19159	10W	3000K	800lm	700mA	60°	Ø100x100	Ø86
	(2 way) 19160	10W	3000K	800lm	700mA	60°	Ø100x100	Ø86
	(4 way) 19161	10W	3000K	800lm	700mA	60°	Ø100x100	Ø86

AC220-240V IP 67  CRI>90

 SDCM <3  Class I  IK10  CE

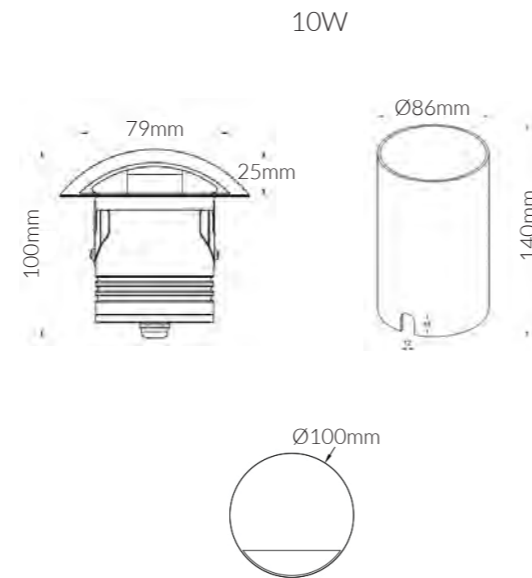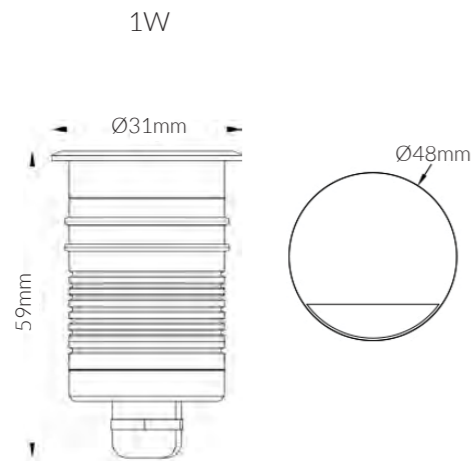

**GIL**  
 1 way / 2 way / 4 way

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminium+Stainless Steel #316  
 Light Window: Step tempered clear glass.T=8mm  
 Gasket: : Molding shaped seal  
 Finish: Stainless steel 316L#  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



Load Capacity: 1720 Kilos


**Product Options:**

Wattage: 3W / 7W / 18W  
 Beam Angle: 15° / 30° / 50°  
 Control: Switchable / TRIAC / 1-10V / DALI / PWM  
 Accessory: Mounting Sleeve, Honeycomb Louver

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cada	15406	9x1.2W	3000K	972lm	64mA	20°	Ø210x179	Ø102
	15919	9x1.2W	4000K	1,026lm	64mA	20°	Ø210x179	Ø102
	15920	9x1.2W	6000K	1,080lm	64mA	20°	Ø210x179	Ø102

AC220-240V IP 67  CRI>80

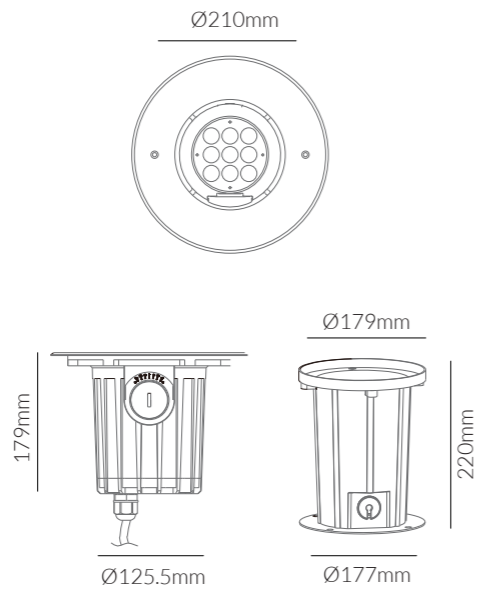

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminium+Stainless Steel #316  
 Light Window: Step tempered clear glass.T=8mm  
 Gasket: : Molding shaped seal  
 Finish: Stainless steel 316L#  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



Load Capacity: 2129 Kilos


**Product Options:**

Wattage: 4W / 6W / 20W  
 Beam Angle: 10° / 15° / 20°  
 Control: Switchable / TRIAC / 1-10V / DALI / PWM  
 Accessory: Mounting Sleeve, Honeycomb Louver

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Granco	15120	25W	3000K	2,250lm	133mA	30°	Ø250x190	Ø153
	15849	25W	4000K	2,375lm	133mA	30°	Ø250x190	Ø153
	15850	25W	6000K	2,500lm	133mA	30°	Ø250x190	Ø153

AC220-240V IP 67  CRI>80



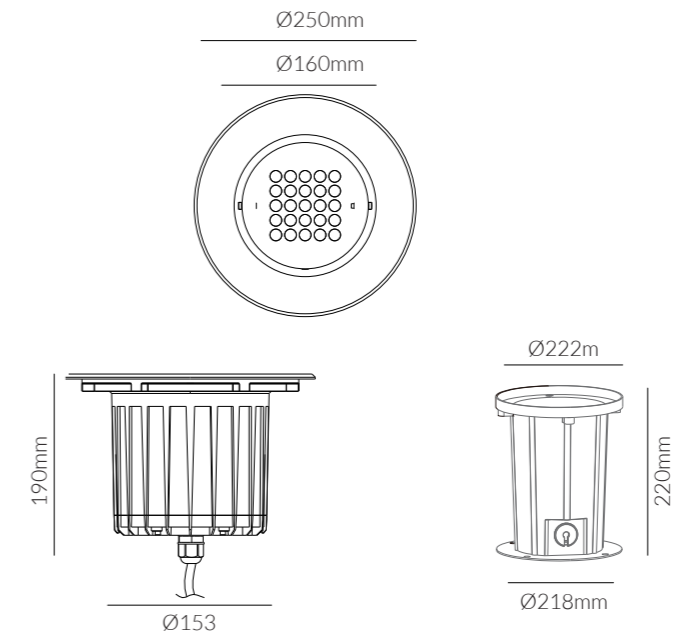



**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminium+Stainless Steel #316  
 Light Window: Step tempered clear glass.T=8mm  
 Finish: Stainless steel 316L#  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality

Load Capacity: 2578 Kilos

**Product Options:**

Wattage: 6x3W  
 Beam Angle: 9° / 15° / 30° / 45° / 60°  
 Control: Switchable / TRIAC / 1-10V / DALI / PWM  
 Accessory: Mounting Sleeve, Honeycomb Louver




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Trado	15118	3x2W	3000K	540lm	30mA	20°	Ø116x102	Ø70
	15873	3x2W	4000K	570lm	30mA	20°	Ø116x102	Ø70
	15874	3x2W	6000K	600lm	30mA	20°	Ø116x102	Ø70
	15119	6x2W	3000K	1,080lm	56mA	45°	Ø173x86	Ø118.5
	15875	6x2W	4000K	1,140lm	56mA	45°	Ø173x86	Ø118.5
	15876	6x2W	6000K	1,200lm	56mA	45°	Ø173x86	Ø118.5

AC220-240V IP65 CRI>80



**TRADO**

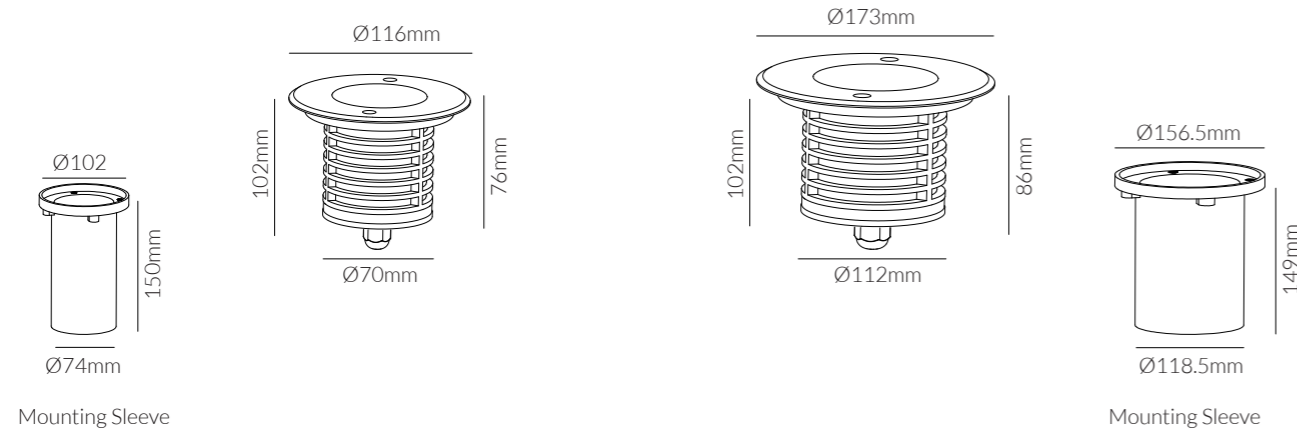

**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +55°C  
 Material: Aluminum+PMMA  
 Finish: Silver  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Walkways, Pathways, etc



Load Capacity: 3000kgs

**Product Options:**

CCT: 2700K-6000K, RGB  
 Accessories: Stainless Steel Cap, Connector  
 Control: Triac/Dali/1-10V/PWM/DMX512

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Quara	20844	14.4W/Mtr	3000K	1,152lm	-	120°	L:1000 x W:30.5 x H:54.8mm	-

DC 24V
IP 68
 120°
CRI>80
 SDCM <3
 Class I
 IK10
 CE

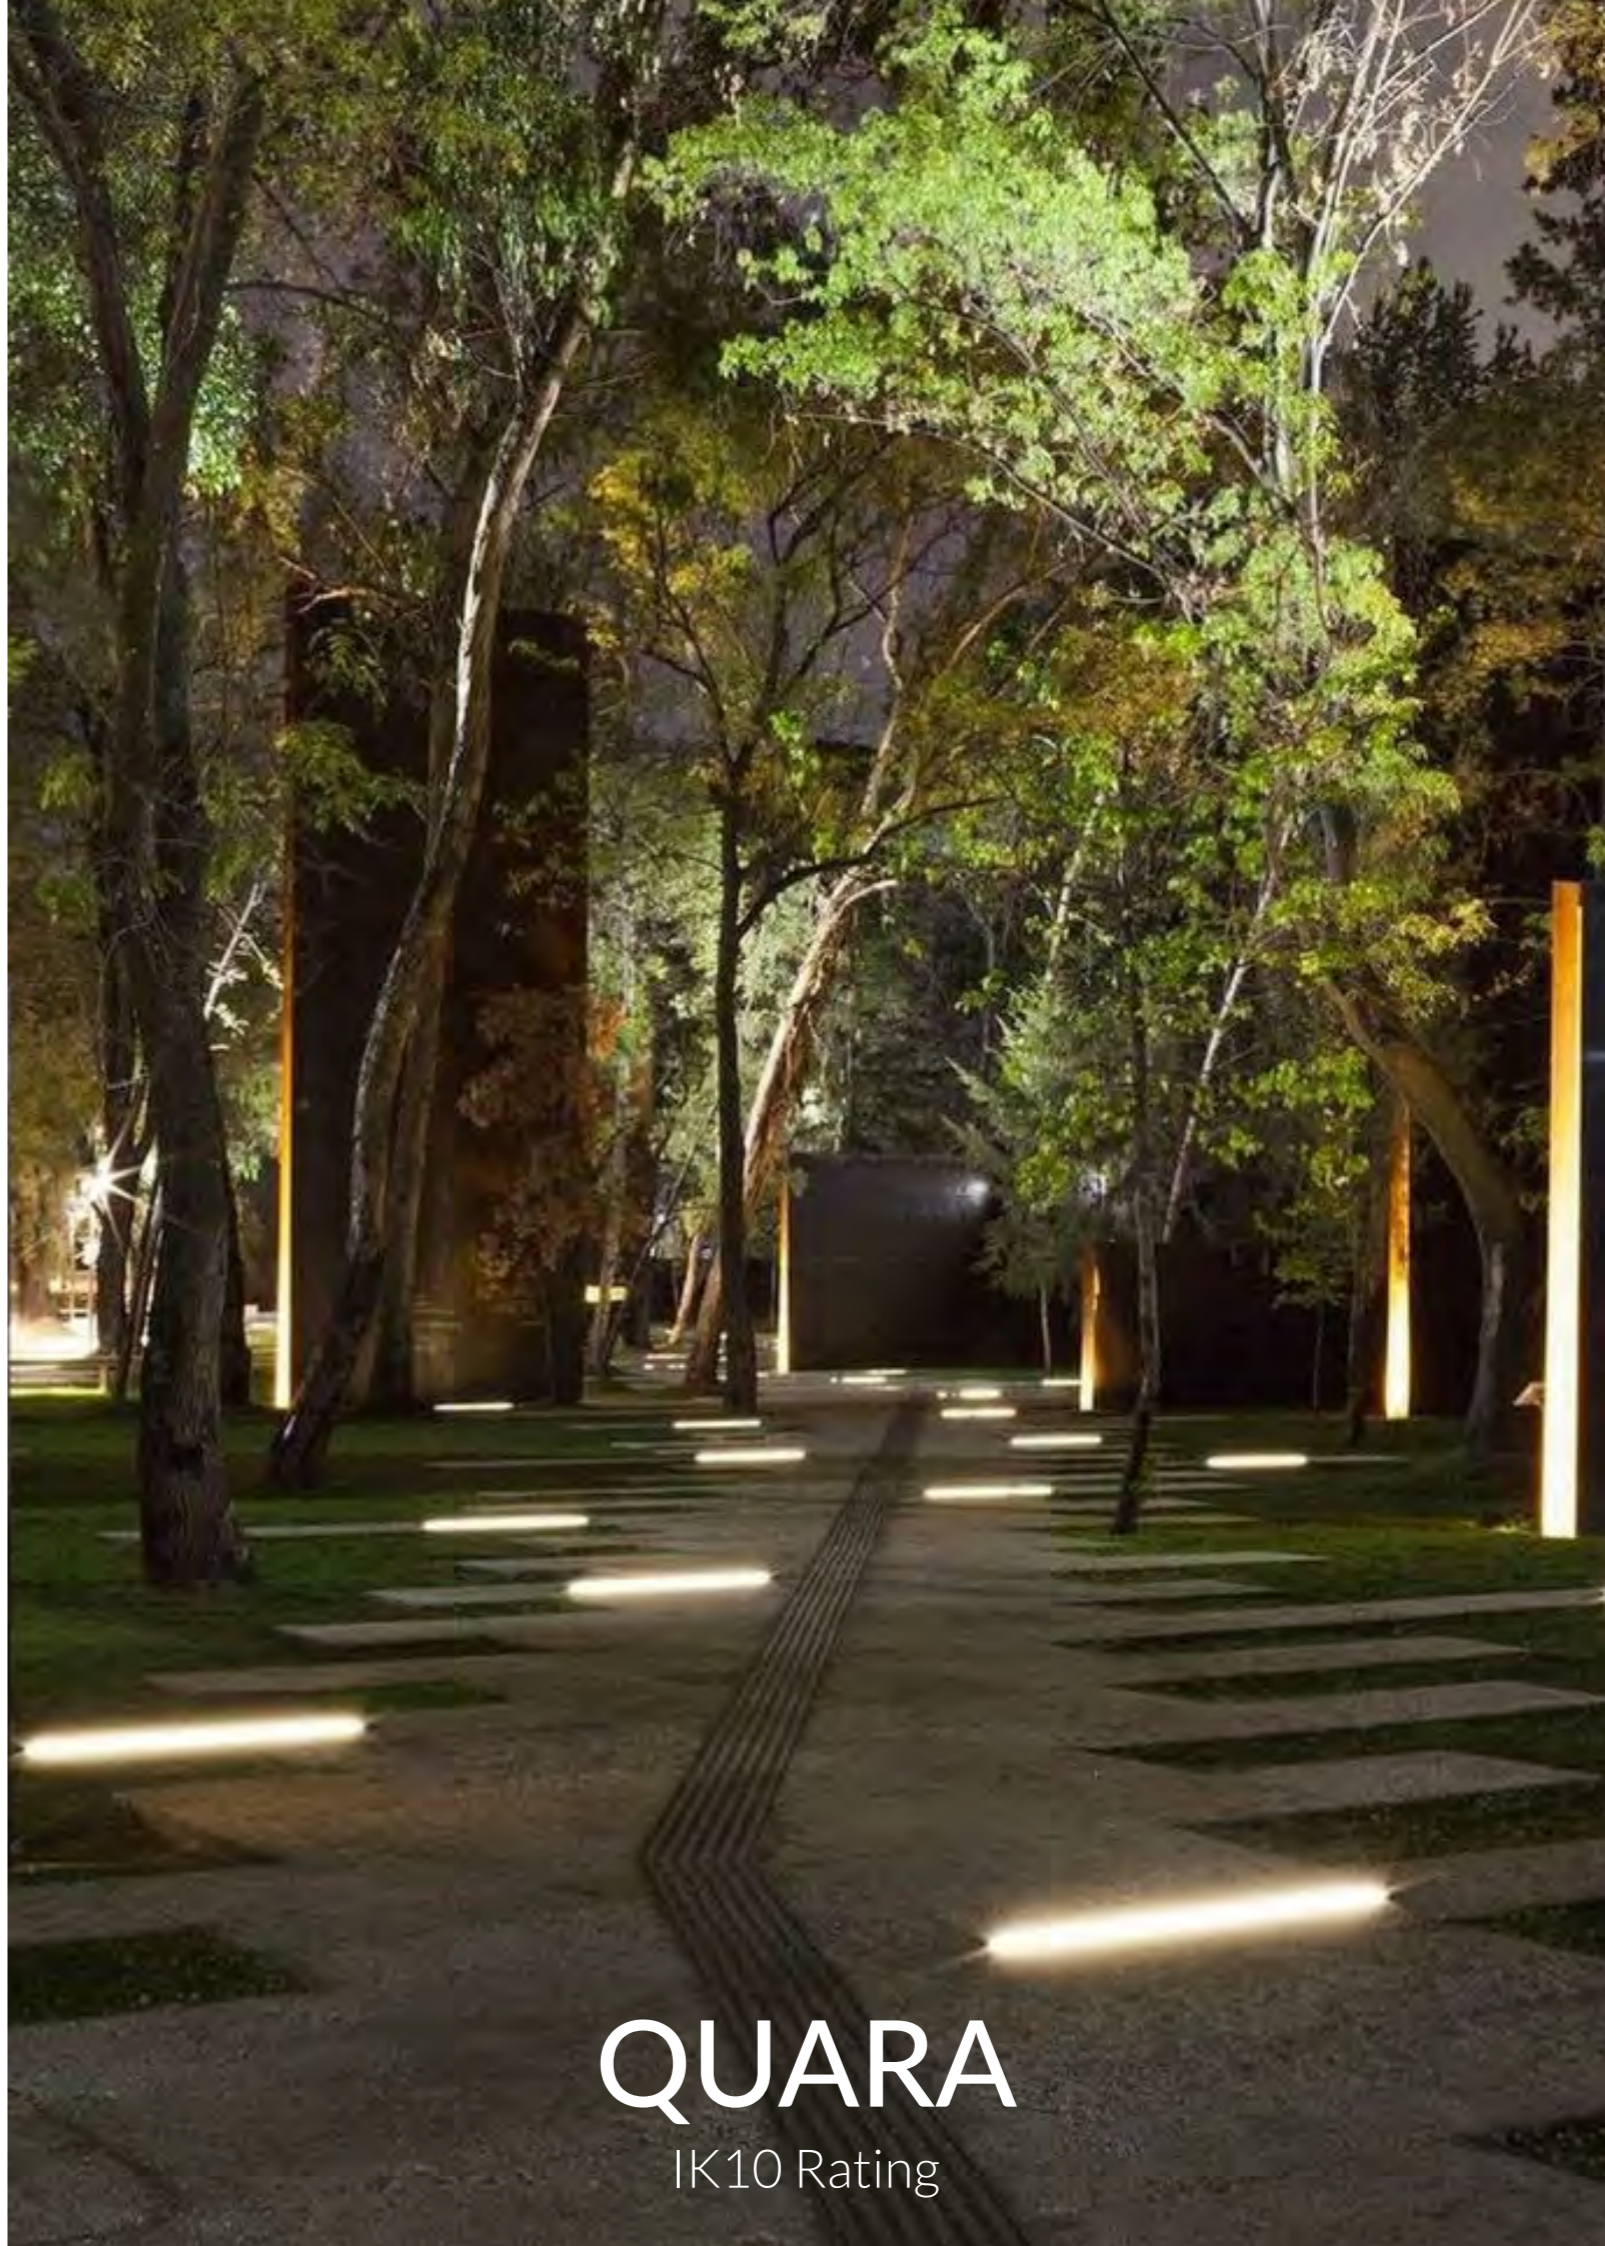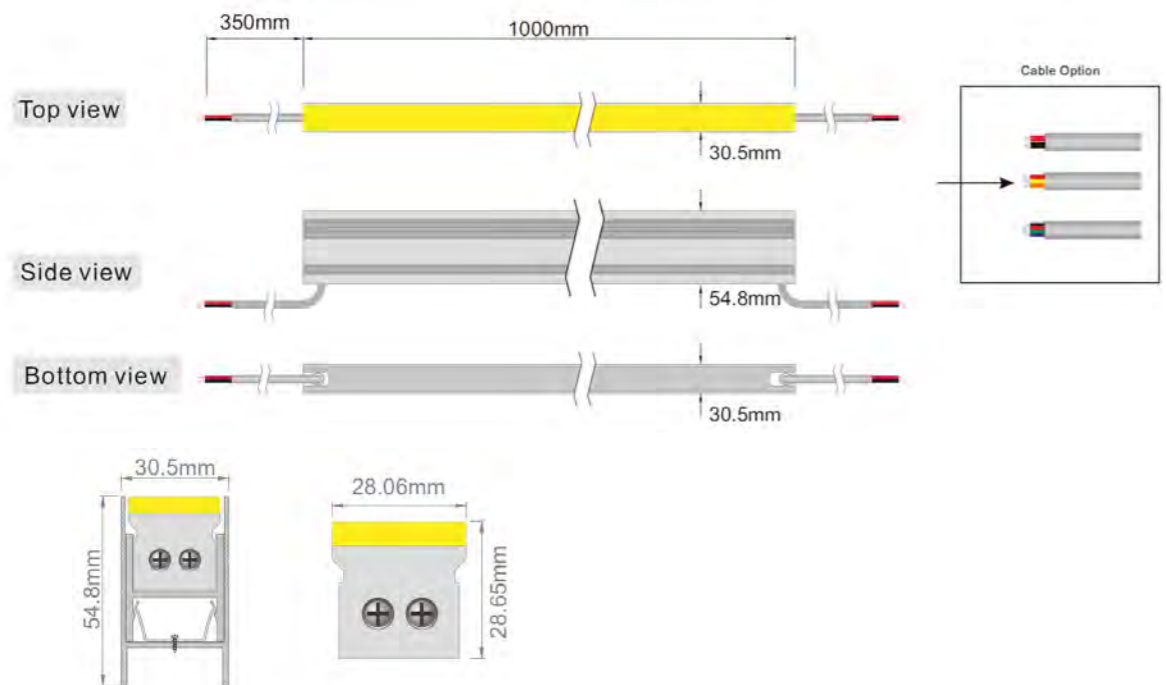

**QUARA**  
 IK10 Rating




**WALL**

**Product Specifications:**

Lamp Type: 2 x GU10  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum body+Tempered Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Eakare</b>	13582	-	-	-	-	-	155x93x63	-

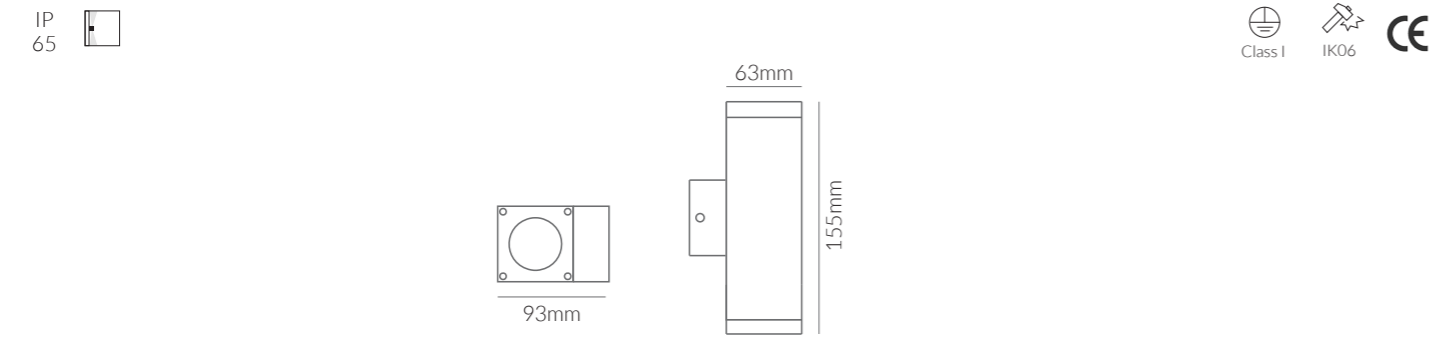


**Product Specifications:**

Lamp Type: 2 x E27 PAR30  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum body+Tempered Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Unter</b>	14344	-	-	-	-	-	300x175x108	-

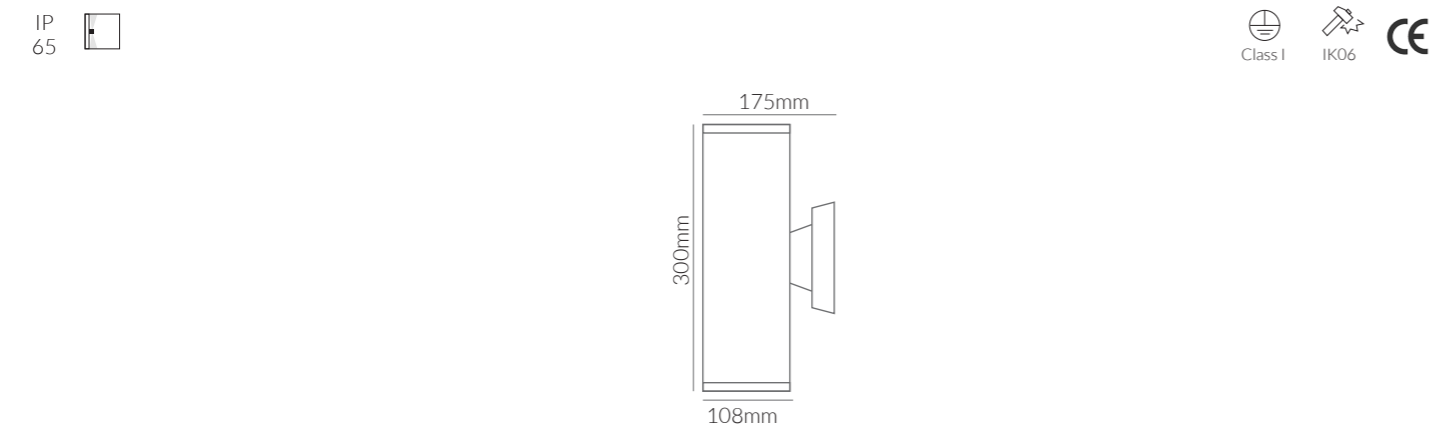


**Product Specifications:**

Lamp Type: E27 PAR30  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum body+Tempered Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Ganz</b>	13578	-	-	-	-	-	180x175x108	-

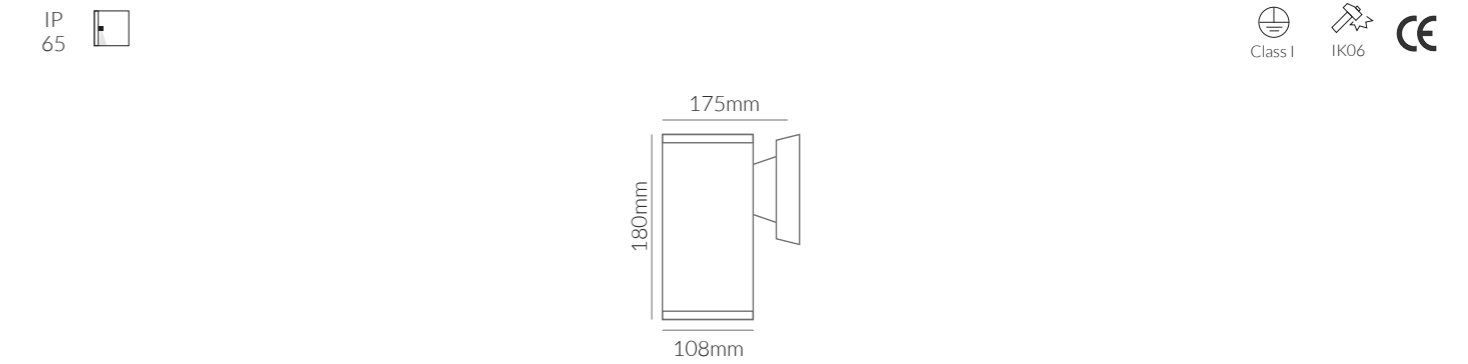


**Product Specifications:**

Lamp Type: 2 x E27 PAR30  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum body+Tempered Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Halber</b>	13579	-	-	-	-	-	300x175x108	-

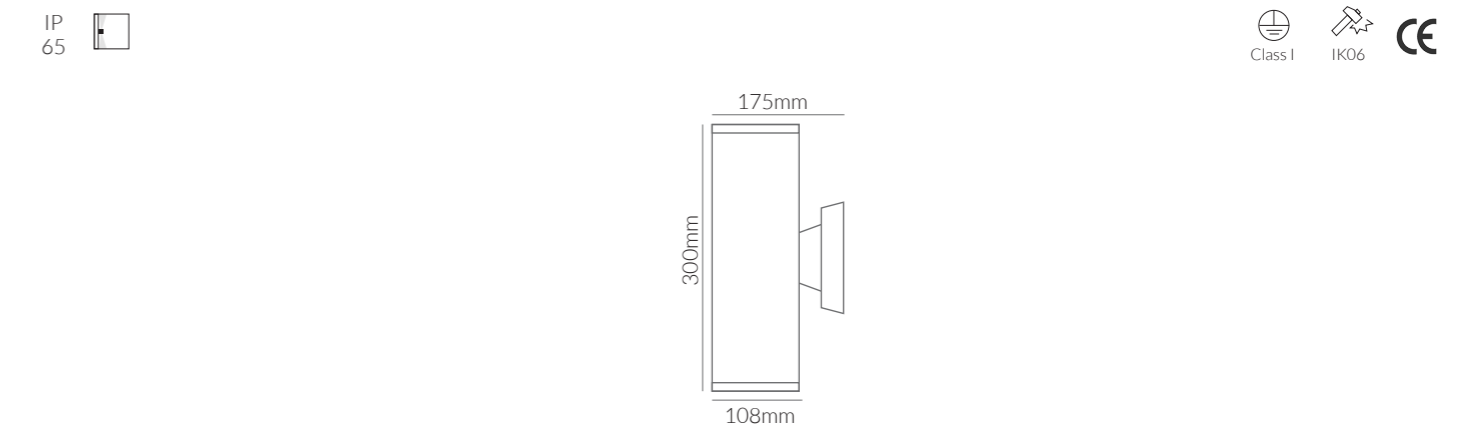

# ELVIO

## IN CONCRETE BODY



SYV | Outdoor Wall Lights

### Product Specifications:

Lamp Type: LUMENS LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Concrete Body  
 Finish: Beige Satin Cement  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality




### Product Options:

CCT: 3000K - 6000K  
 Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Elvio</b>	15721	8W	3000K	720lm	10mA	-	Ø114x232	-

AC220-240V IP65  35° CRI>80 PF>0.9

 SDCM <4  Class II  IK05  CE

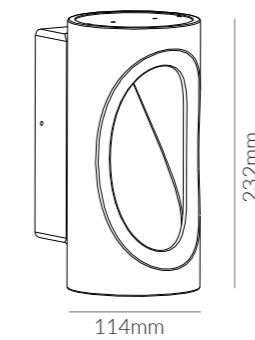

 Lifetime Warranty on Body

**Product Specifications:**

Lamp Type: LUMILED's  
 Operating Temp.: -20°C ~ +50°C  
 Material: Concrete Body  
 Finish: White sandstone  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

CCT: 3000K - 6000K  
 Finish: White  
 Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Alfio</b>	18875	12W	3000K	1,260lm	350mA	152°	L:130 x W:150 x H:165mm	-

AC220-240V IP65  152° CRI>80 PF>0.9

 SDCM <3  Class I  IK06  Flicker Free  CE

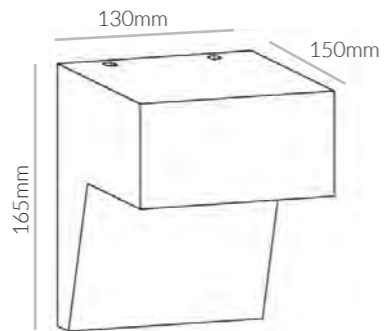

# ALORIA

SYV | Outdoor Wall Lights

## Product Specifications:

Lamp Type: PHILIPS LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Concrete Body  
 Finish: White sandstone & Yellow Granite  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality



SKU 18874



SKU 19724


## Product Options:


CCT: 3000K - 6000K  
 Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Aloria	18874	13W	3000K	720lm	300mA	72°	Ø160 x 142mm	White sandstone
	19724	13W	3000K	720lm	300mA	72°	Ø160 x 142mm	Yellow Granite

AC220-240V IP65  CRI>80 PF>0.9

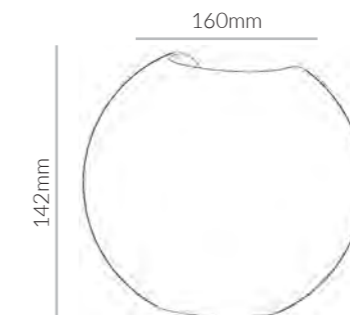


 Lifetime Warranty on Body



**Product Specifications:**

Lamp Type: PHILIPS LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Concrete body  
 Finish: Grey 18  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



 Lifetime Warranty on Body



**Product Options:**

CCT: 3000K - 6000K  
 Finish: Stone Pattern effect, White Sandstone, Black Sandstone, Natural Grey  
 Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Pamplona</b>	19904	10W	3000K	900lm	300mA	82.7°	L:135 x W:110 x H:200mm	-

AC220-240V IP65  CRI>80 PF>0.9

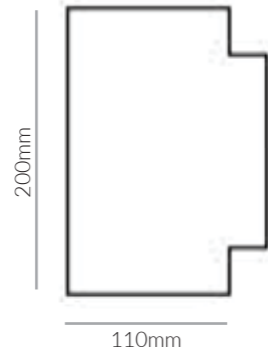

**Product Specifications:**

Lamp Type: PHILIPS LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Concrete Body  
 Finish: Grey 18  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality



 Lifetime Warranty on Body



**Product Options:**

CCT: 3000K - 6000K  
 Finish: Stone Pattern effect, White Sandstone, Black Sandstone, Natural Grey  
 Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cutout
<b>Coruna</b>	19903	6W	3000K	540lm	150mA	82.7°	L:135 x W:110 x H:170mm	-

AC220-240V IP65  CRI>80 PF>0.9

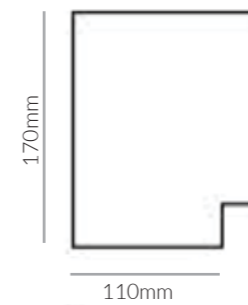

# ALWAR

Adjustable Beam Optics

SYV | Outdoor Wall Lights

### Product Specifications:


Lamp Type: PHILIPS LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Concrete Body  
 Finish: White sandstone & Yellow Granite  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality



### Product Options:

CCT: 3000K - 6000K  
 Finish: Stone Pattern effect, White Sandstone, Black Sandstone, Natural Grey  
 Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish		
<b>Alwar</b>	19143	12W	3000K	1,080lm	300mA	2° - 80° (Adjustable)	L: 95 x W: 120 x H: 190mm	Dark Grey Granite		
AC220- 240V	IP 65		CRI>80	PF>0.9			SDCM <3	Class II	IK05	CE

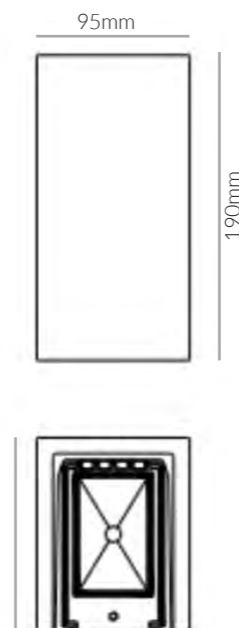

Lifetime Warranty on Body

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Concrete Body  
 Finish: Dark Grey Granite  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 10W  
 CCT: 3000K - 6000K  
 Finish: White  
 Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Arlet</b>	19144	5W	3000K	450lm	350mA	360°	D: 200 x H: 70mm	-

AC220-240V IP65  CRI>80 PF>0.9



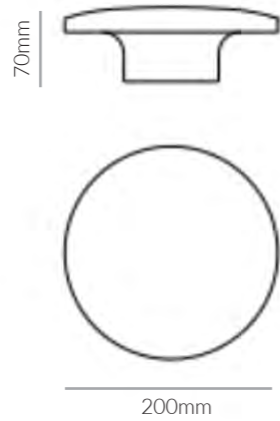

ZIMAL

SYV | Outdoor Wall Lights

Product Specifications:


Lamp Type: GU10  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum body+Tempered Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Enire	13576	-	-	-	-	-	80x68xØ93	-

IP 65 

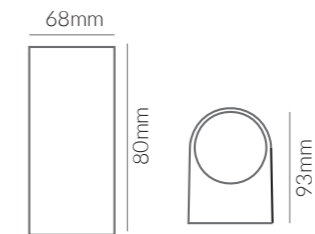

Product Specifications:


Lamp Type: 2 x GU10  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum body+Tempered Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Zimal	13577	-	-	-	-	-	150x68xØ93	-

IP 65 

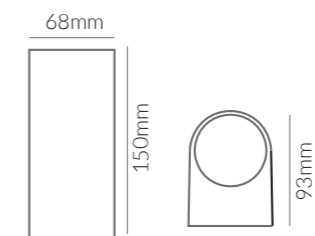

**Product Specifications:**


Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium / Glass  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality





**Product Options:**

CCT: 3000K - 6000K  
 Finish: Black / Silver / White / Rust  
 Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Luz	14696	2x6W	3000K	1,080lm	300mA	73°	240x94x106	-
	15658	2x6W	5000K	1,176lm	300mA	73°	240x94x106	-

AC220-240V IP65  CRI>80 PF>0.9

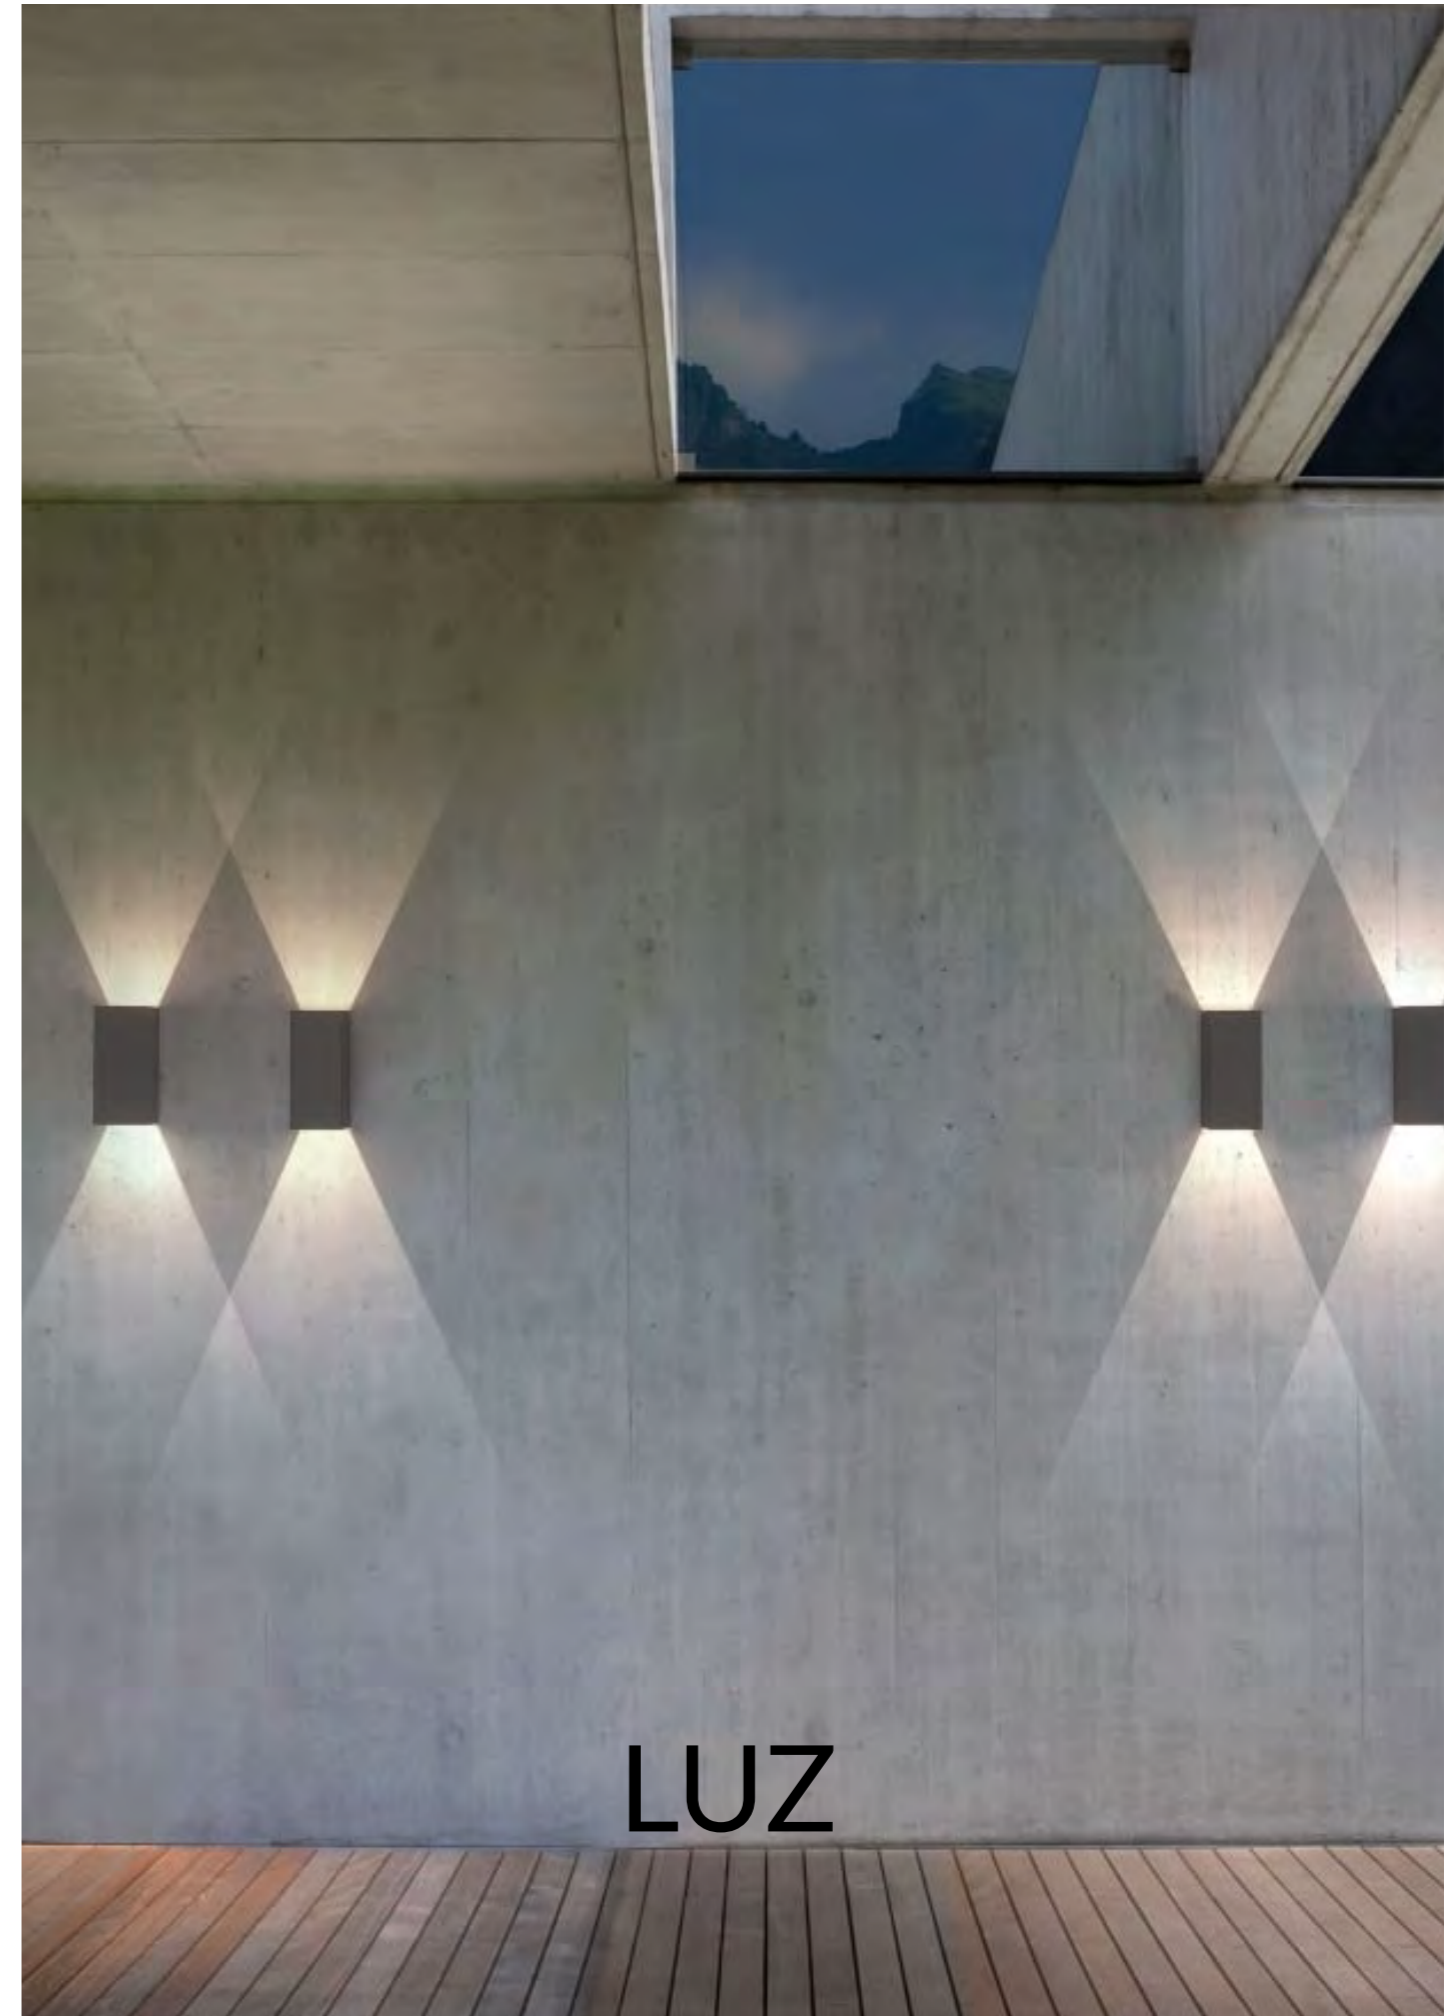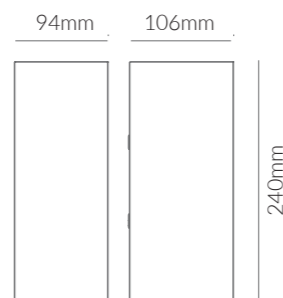

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminium + PC  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

CCT: 3000K - 6000K  
 Finish: White  
 Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ojo	15400	10W	3000K	900lm	300mA	360°	Ø240x48	-

AC220-240V IP65 360° CRI>80 PF>0.9

SDCM <5 Class I IK06 CE

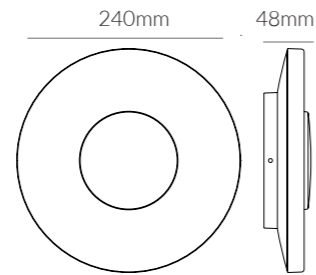

OJO

**Product Specifications:**

Lamp Type: SAMSUNG LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-casting aluminum + Frost PC  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality





**Product Options:**

CCT: 3000K - 6000K  
 Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Reja	15249	9W	3000K	900lm	350mA	142°	Ø188x98	-

AC220-240V IP65  142° CRI>80 PF>0.9

 SDCM <5  Class I  IK06  CE

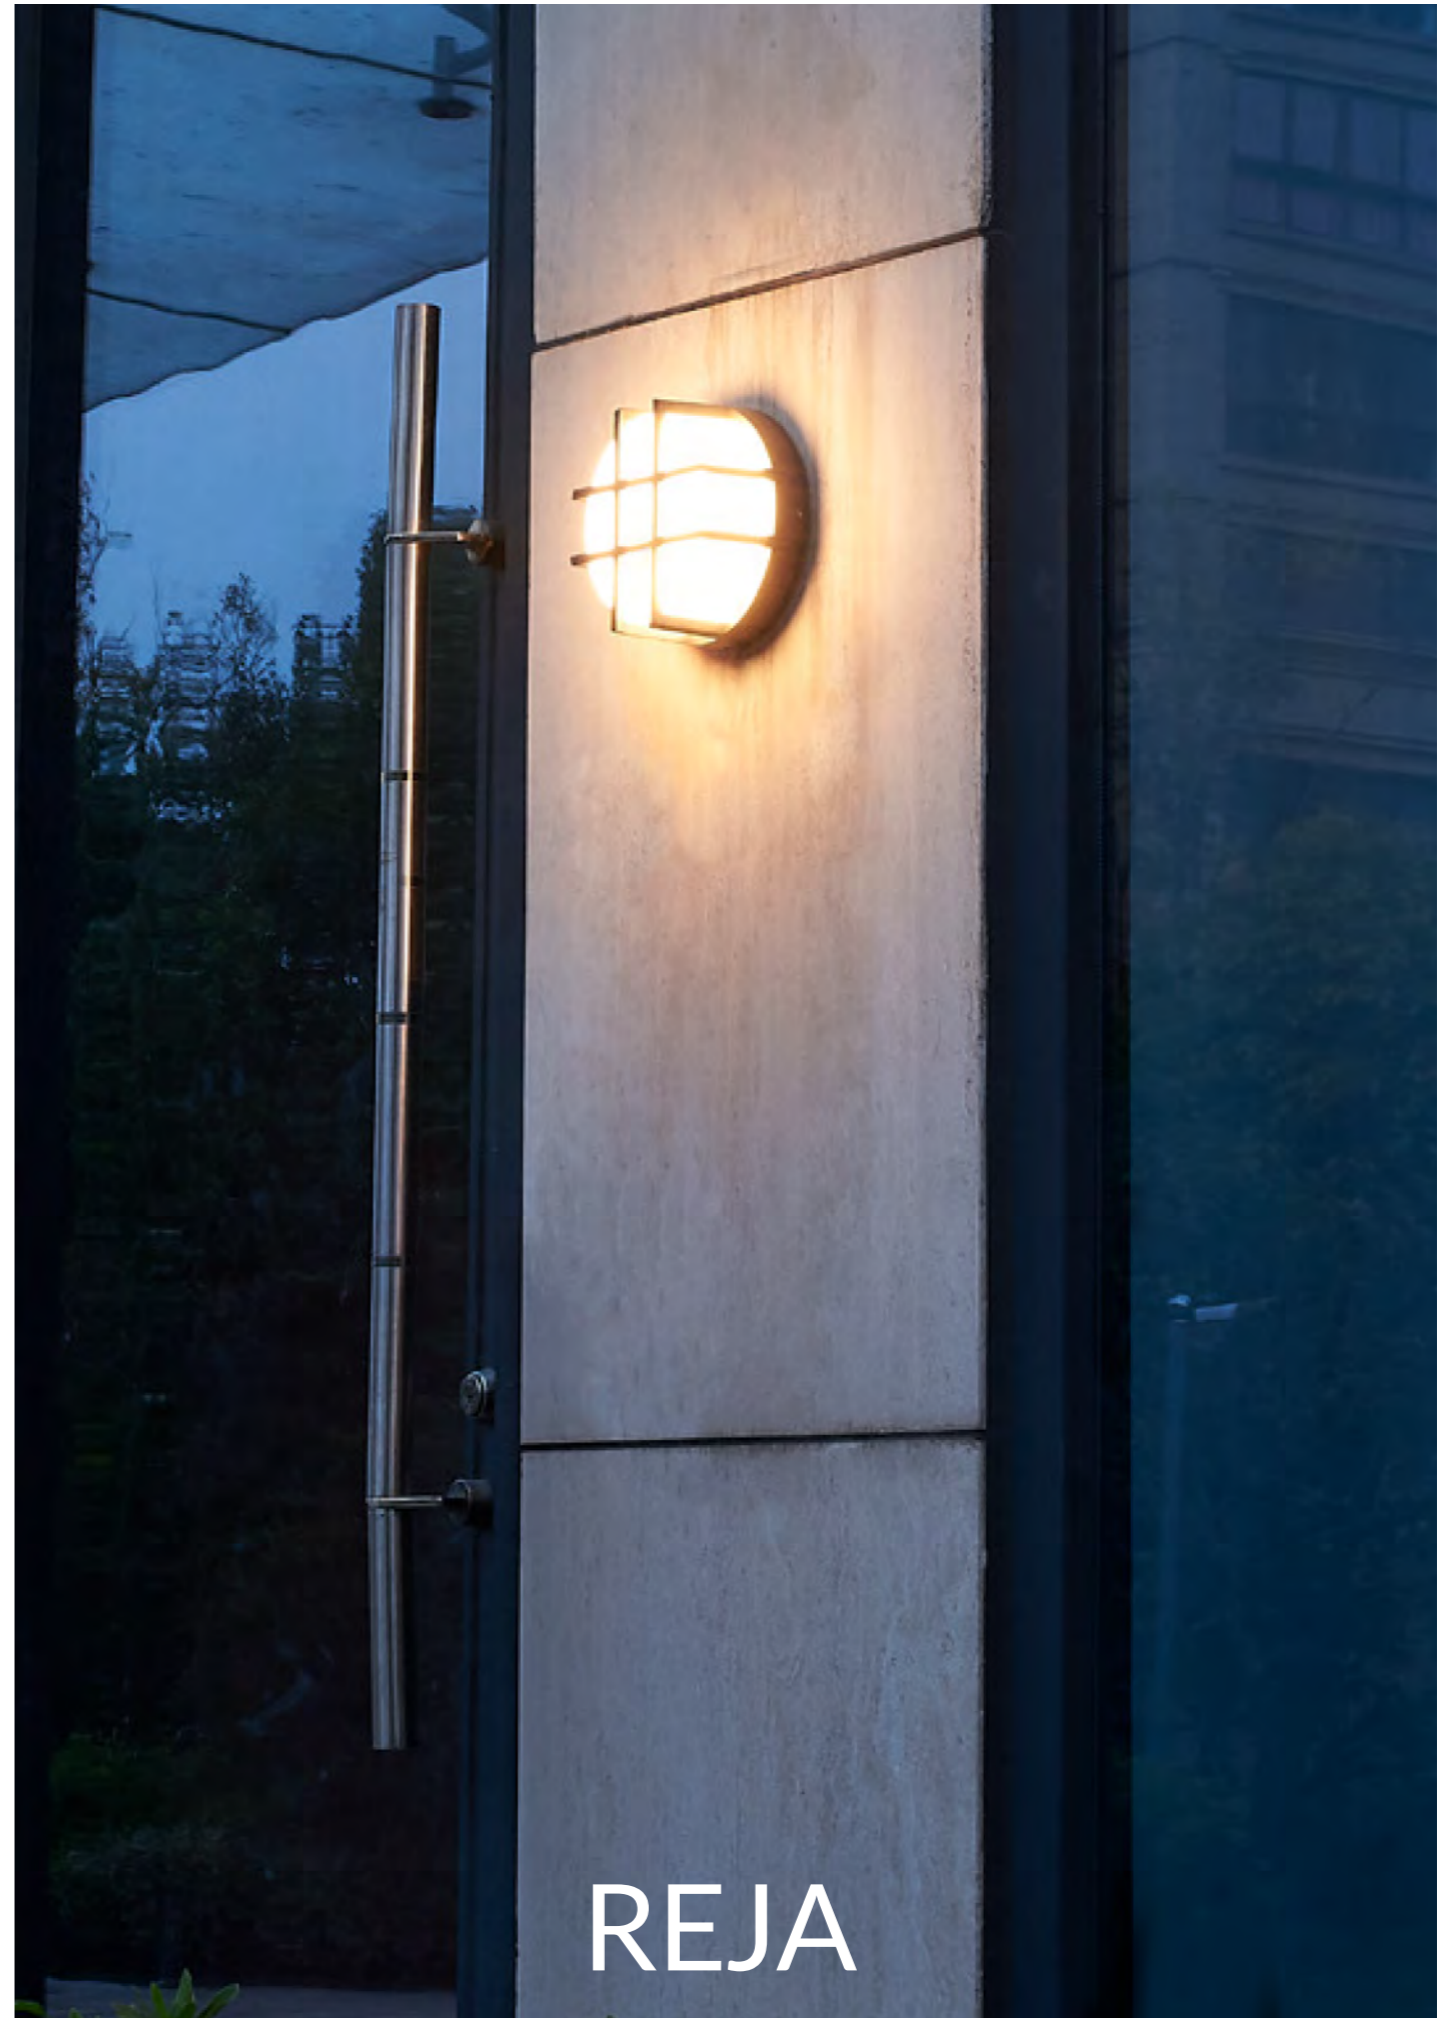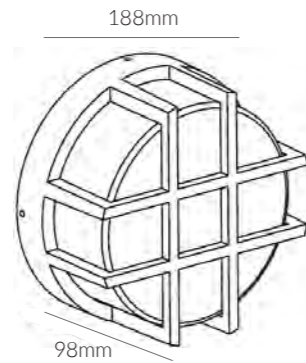

**Product Specifications:**

Lamp Type: SAMSUNG LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-casting aluminum + Frost PC + Clear PC  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

CCT: 3000K - 6000K  
 Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Verja</b>	15250	9W	3000K	900lm	350mA	138°	138x238	-

AC220-240V IP65 CRI>80 PF>0.9

SDCM <5 Class I IK06 CE

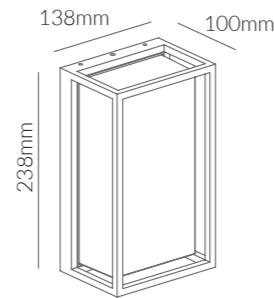

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium + PC  
 Finish: Black  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 3000K - 6000K  
 Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Jarra</b>	15398	9W	3000k	810lm	350mA	185°	110x176x239.5	-

AC220-240V IP65 CRI>80 PF>0.9

SDCM <4 Class II IK08 CE

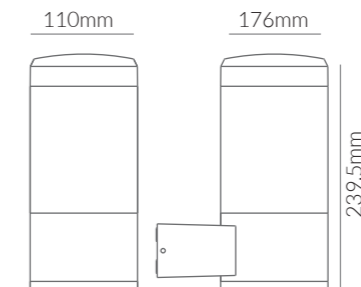




**Product Specifications:**

Lamp Type: E27  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum body  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Canyon</b>	18094	-	-	-	-	-	90x101	-

IP 65

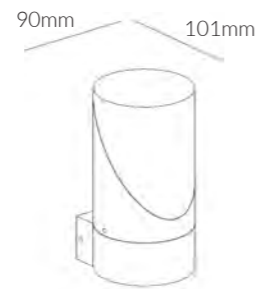



**Product Specifications:**

Lamp Type: E27  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum body  
 Finish: Black  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Matia</b>	18089	-	-	-	-	-	145x205x430	-

IP 65

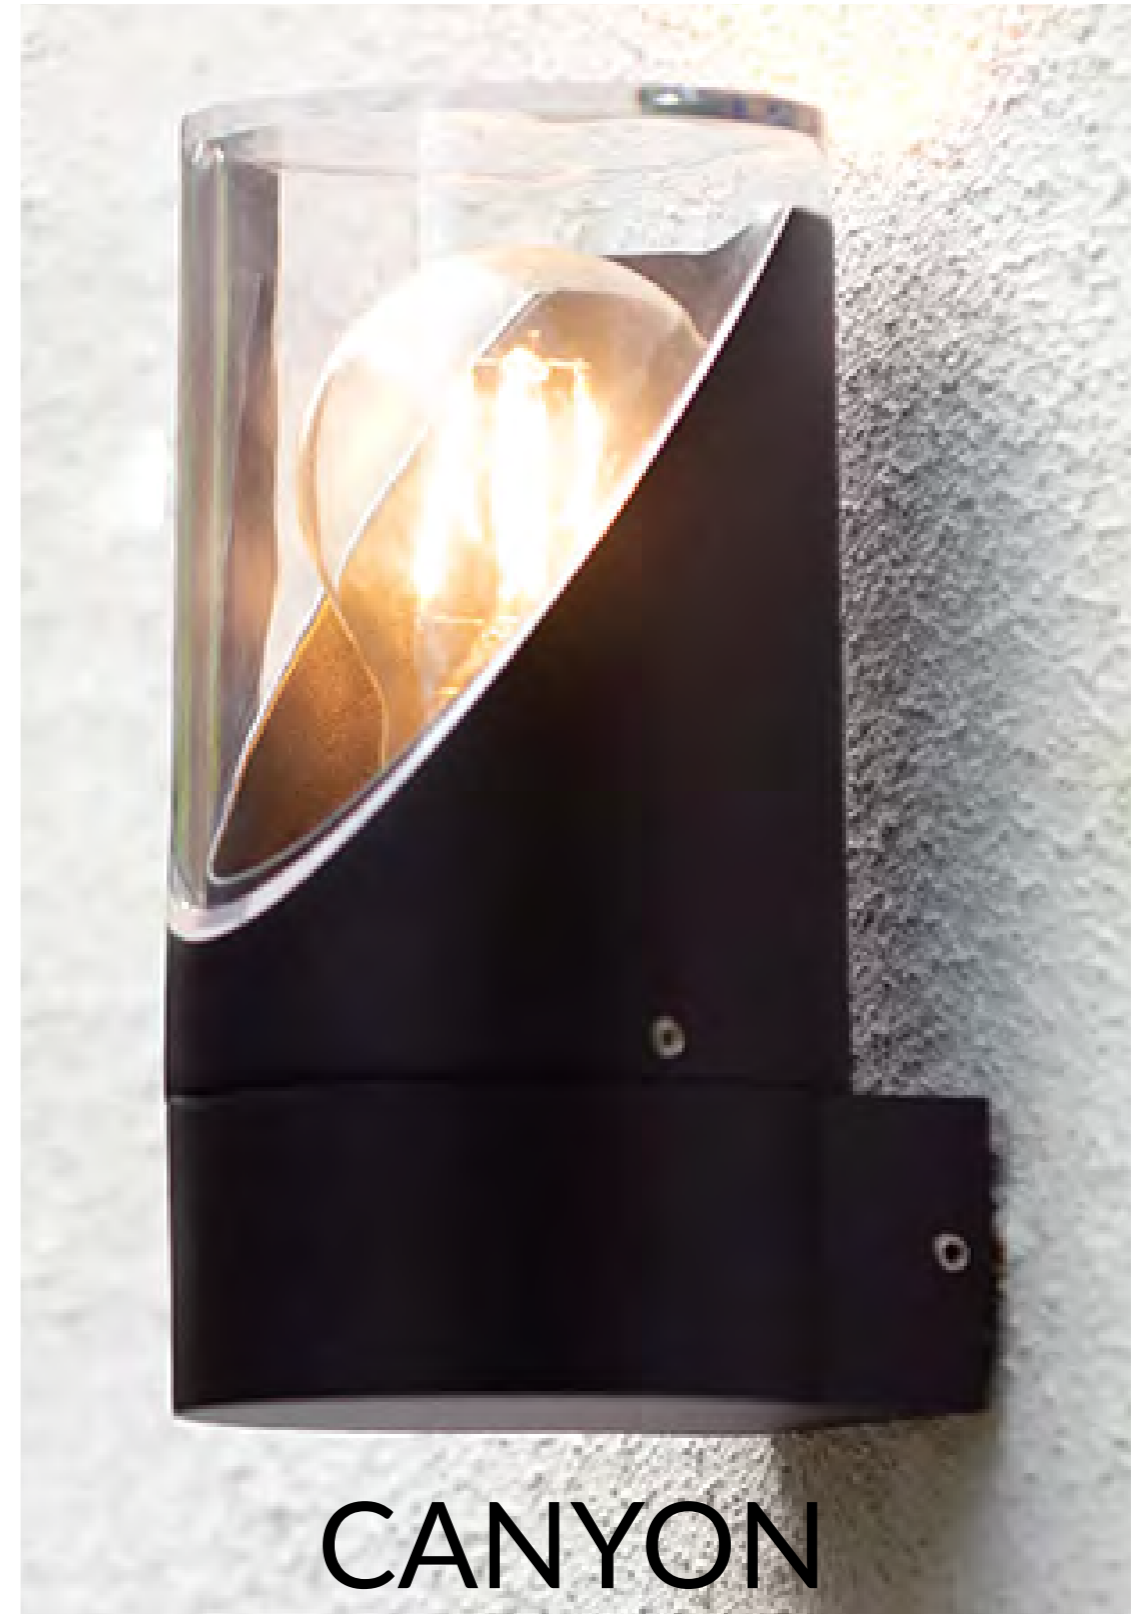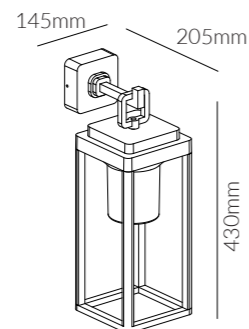

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminum body+ Opal PC Diffuser  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality





**Product Options:**

CCT: 3000K - 6000K  
 Finish: White  
 Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Warfel</b>	14472	12W	3000K	1,100lm	300mA	360°	200x180	-

AC220-240V IP65  CRI>80 PF>0.9



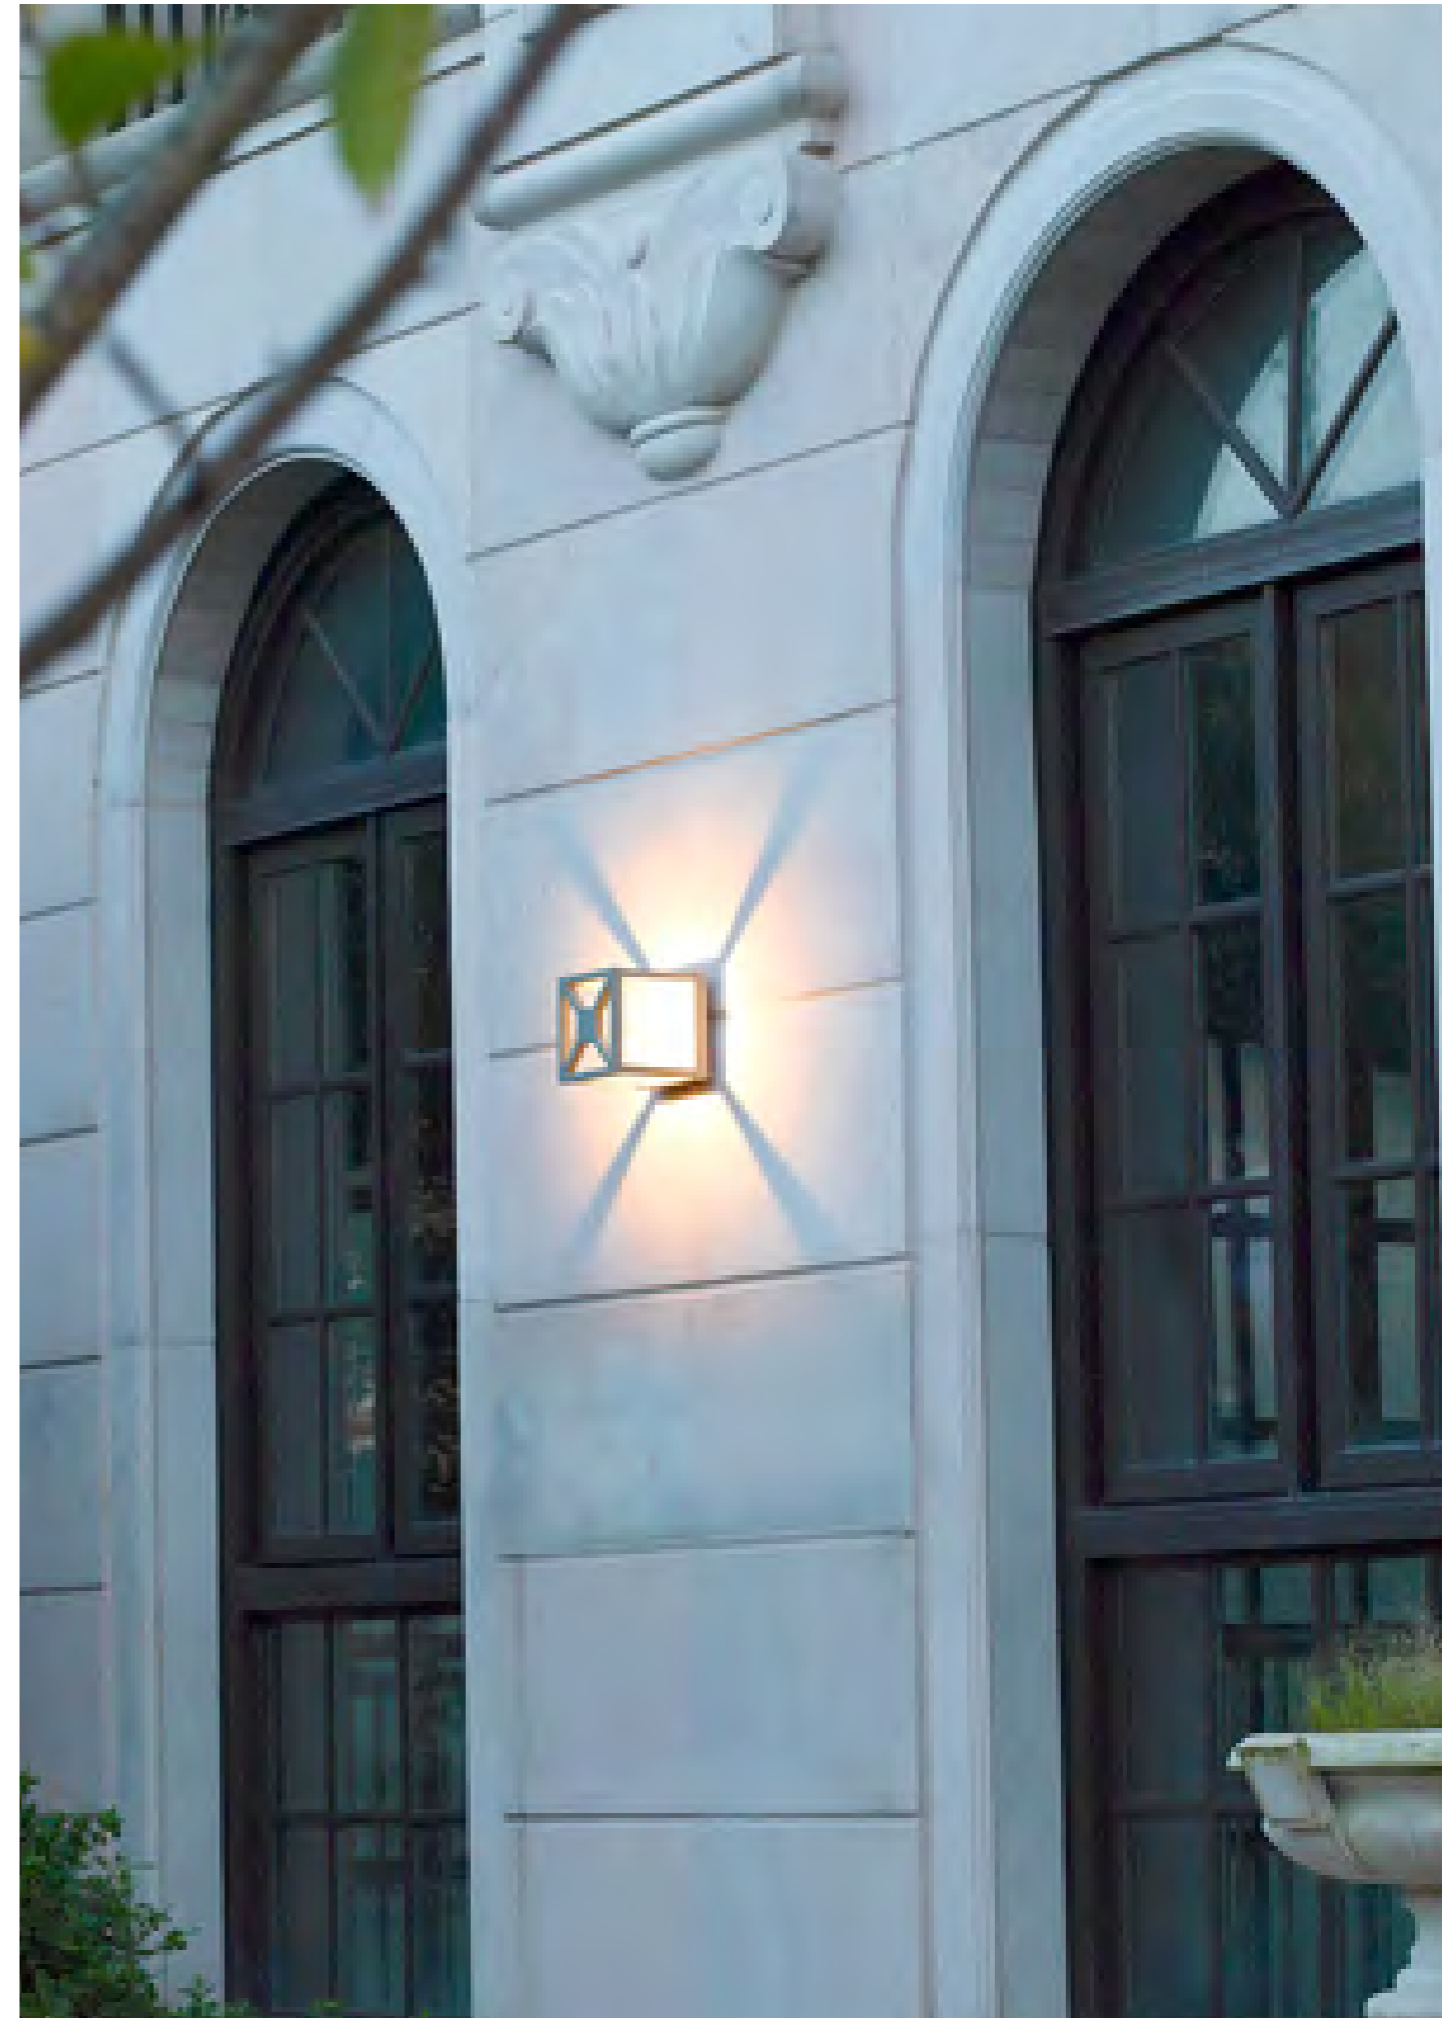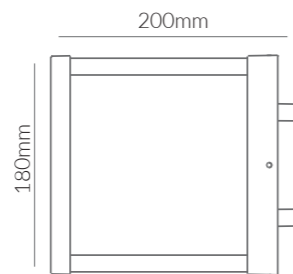

LAVARE

SYV | Outdoor Wall Lights

Product Specifications:

Lamp Type: CREE LED  
Operating Temp.: -20°C ~ +50°C  
Material: Aluminum body+ Opal PC Diffuser  
Finish: Dark Grey  
Lifespan: 50,000 Hrs  
Warranty: 5 Years  
Applications: Commercial, Retail, Residential, Hospitality




Product Options:

CCT: 3000K - 6000K  
Finish: White  
Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Lavare	12098	4x2W	3000K	720lm	300mA	83°	110x50	-

AC220-240V IP65  CRI>80 PF>0.9

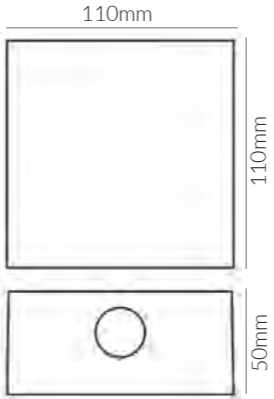

**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium + PC  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 3W  
 CCT: 3000K - 6000K  
 Finish: White  
 Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Luna</b>	15397	10W	3000K	1,156lm	350mA	113°	260x100	-

AC220-240V IP65 CRI>80 PF>0.9

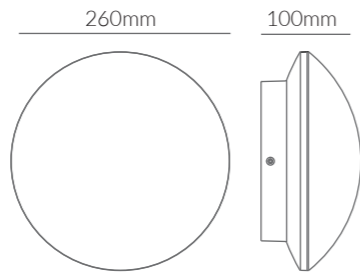

**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium + PC  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 3000K - 6000K  
 Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Mirar</b>	15399	11W	3000k	990lm	36mA	114°	200x55	-

(White) 17995 11W 3000k 990lm 36mA 114° 200x55 -

AC220-240V IP65 CRI>80 PF>0.9

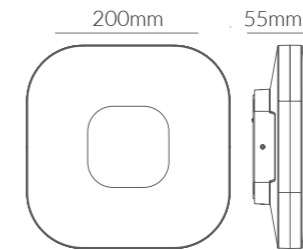

**Product Specifications:**


Lamp Type: NICHIA LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium Alloy #6063  
 Reflector: Optical reflector. efficiency≥85%  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 4.5W  
 CCT: 3000K - 6000K  
 Beam Angle: 10° / 38°  
 Finish: Black / Grey / White  
 Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Techar</b>	15408	25W	3000K	2,412lm	350mA	22°	260x100	-

AC220-240V IP65  CRI>80 PF>0.9

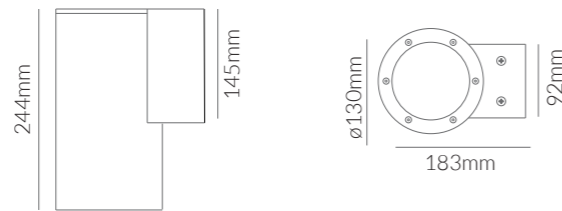

**Product Specifications:**

Lamp Type: NICHIA LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium Alloy #6063  
 Reflector: Optical reflector. efficiency≥85%  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 2x8W / 2x12W / 2x18W  
 CCT: 3000K - 6000K  
 Beam Angle: 12° / 38°  
 Finish: Black / Grey / White  
 Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Vara</b>	15409	2x30W	3000K	6,000lm	292mA	25°	160x400	-

AC220-240V IP65  CRI>80 PF>0.9



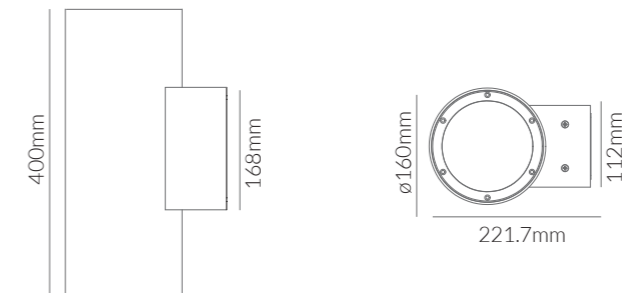

**Product Specifications:**


Lamp Type: E27  
 Operating Temp.: -20°C ~ +50°C  
 Material: Powder coated aluminium and Glass  
 Finish: Silver  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Tello</b>	16795	-	-	-	-	-	209x94x106	-

IP 65 

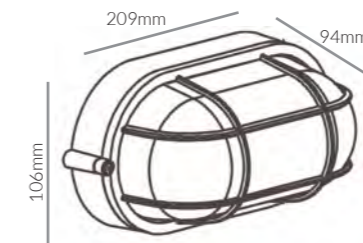

**Product Specifications:**


Lamp Type: SAMSUNG LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: ABS Body  
 Finish: Black  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Johan</b>	18495	15W	3000K	1200lm	-	-	L: 250 x W: 120 x H: 73mm	-

IP 65 



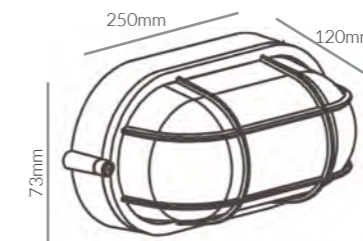

RIVA

SOLANA | Outdoor Wall Lights

Product Specifications:

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminum+PMMA  
 Finish: Black  
 Lifespan: 30,000 Hrs  
 Warranty: 3 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality


Product Options:

CCT: 3000K - 6000K  
 Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Riva	18133	24W	3000K	2,160lm	-	36°	800x90	-

AC220-240V IP65  CRI>80 PF>0.5

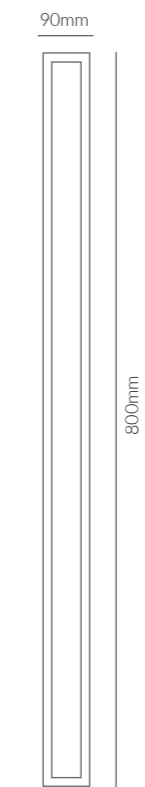


Product Specifications:

Lamp Type: GU10  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum body+Tempered Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Dobulet	13581	-	-	-	-	-	200x180	-

IP 65

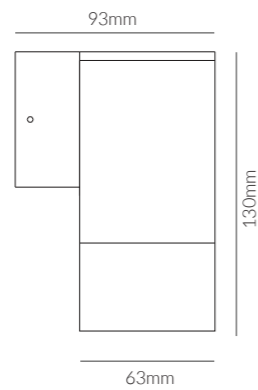






# STEP LIGHTS

### Asymmetrical Optics

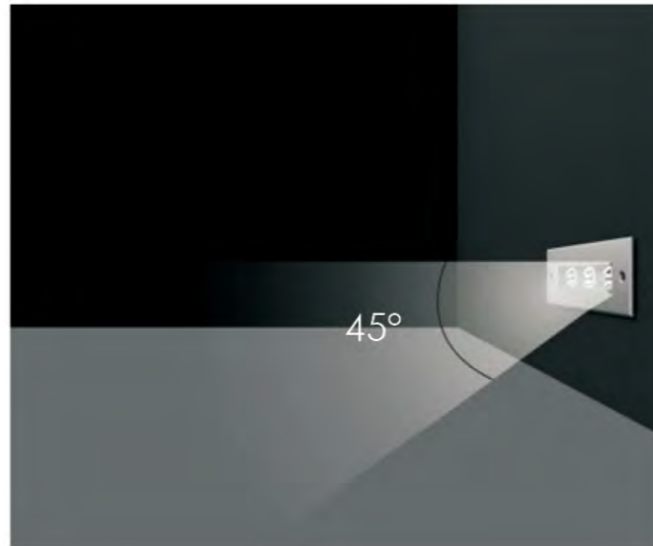

#### Product Specifications:

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: 12# Die-casting grey powder coated aluminum  
 T=60-80um Adhesion of ISO class 1/ASTM class 4B  
 Finish: Chrome  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk





#### Product Options:

CCT: 3000K - 6000K  
 Voltage: DC24V  
 Accessory: Mounting Sleeve  
 Control: DALI / 1-10V / Triac / PWM



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Grado</b>	15191	3x2W	3000K	540lm	25mA	45° 35°	195x63	180

AC220-240V IP 65  45°|35° CRI>80 PF>0.9

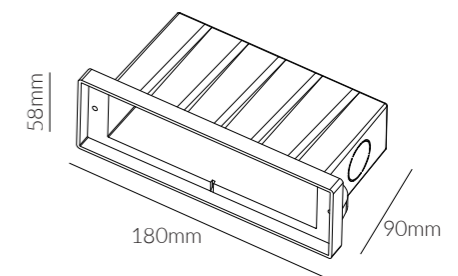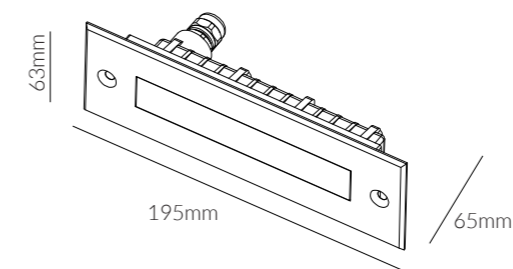

Mounting Sleeve 076#

# GRADO

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminum / glass  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality

**Product Options:**


Wattage: 5W / 7W  
 CCT: 3000K - 6000K  
 Finish: Black / Silver / White / Rust  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Dentro X</b>	17083	6W	3000K	606lm	350mA	80°	193.5x238.5	-
	17084	3W	3000K	285lm	350mA	79°	105x238	-

AC220-240V IP 65  CRI>80 PF>0.9

 SDCM <3  Class I  IK06 

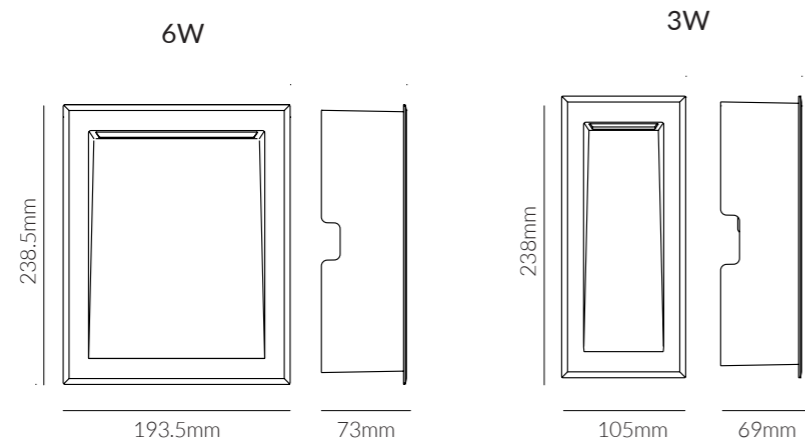

**DENTRO X**



VITO

SYV | Outdoor Step

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium body+Glass  
 Finish: Silver  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk




**Product Options:**

CCT: 3000K - 6000K  
 Finish: Black / Dark Grey / White / Rust  
 Accessory: Mounting Sleeve  
 Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Vito</b>	16767	3W	3000K	99lm	25mA	41°	195x52x58	-

AC220-240V IP 65  CRI>80 PF>0.9

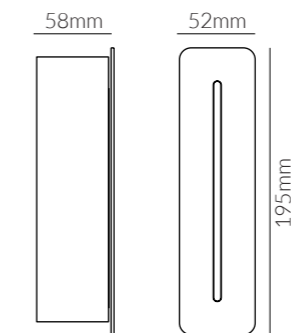

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: 12# Die-casting grey powder coated aluminum T=60-80um  
 Front Cover: 12# Die-casting aluminum  
 Glass: Tempered glass T=2mm  
 Gasket: Molding shaped silicone seal  
 Finish: Sanded Dark Grey  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk


**Product Options:**

CCT: 3000K - 6000K  
 Beam Angle: 40°  
 Finish: Silver Grey / Sanded Black  
 Accessory: Mounting Sleeve  
 Control: DALI / 1-10V / Triac / PWM



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Ruto</b>	15405	2W	3000K	180lm	25mA	30°	195x68x63	-

AC220-240V IP65 CRI>80 PF>0.9

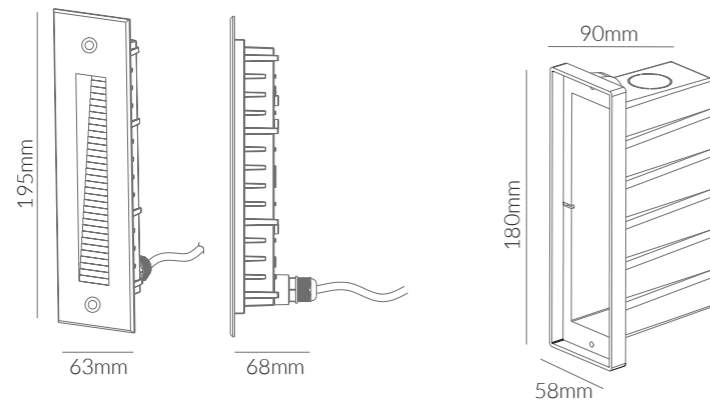

Mounting Sleeve

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium Body  
 Finish: Nickel Satin  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor

**Product Options:**

CCT: 3000K - 6000K  
 Finish: Black / Dark Grey / White / Rust  
 Control: DALI / 1-10V / Triac



12932



12931

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Velor</b>	12931	3W	3000K	270lm	700mA	50°	80x60	-
	12932	3W	3000K	270lm	700mA	50°	80x60	-


AC220-240V IP65 CRI>80 PF>0.9





**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-cast aluminum  
 Finish: Grey  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor

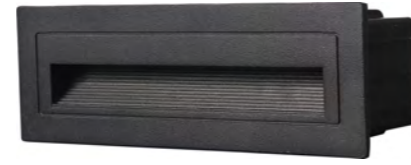






**Product Options:**

CCT: 3000K - 6000K  
 Finish: White, Black  
 Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Elvas</b>	20243	6W	3000K	480lm	260mA	90°	L:210xW:65x H:60mm	303x58

AC220-240V IP65  CRI>90 PF>0.5

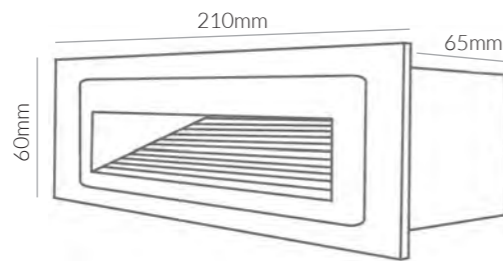

Cutout: 200x55mm

**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Polished stainless steel  
 Finish: Grey  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor




**Product Options:**

CCT: 3000K - 6000K  
 Finish: White, Black  
 Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Kiko</b>	20247	3W	3000K	240lm	260mA	20°	L:115xW:50x H:85mm	105x75mm

AC220-240V IP65  CRI>90 PF>0.5

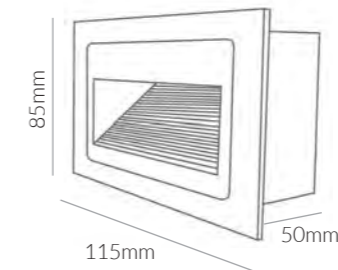


Cutout: 105x75mm





**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +55°C  
 Material: Concrete Body  
 Finish: Grey 18  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor








**Product Options:**

CCT: 3000K - 6000K  
 Finish: Stone Pattern effect, White Sandstone, Black Sandstone, Natural Grey  
 Control: Switchable, TRIAC, PWM, 1-10V, DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Bermeo</b>	19902	2W	3000K	180lm	700mA	62.3°	L:100xW:60x H:100mm	-

AC220-240V IP65  62.3° CRI>80 PF>0.5

 SDCM <3  Class II  IK04  CE

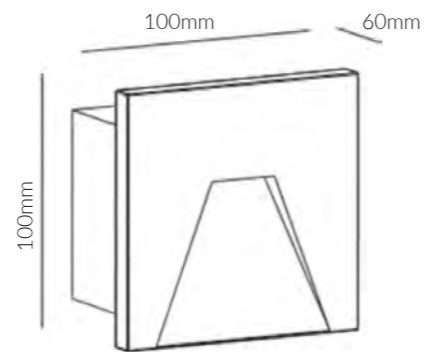

# Bermeo

in Concrete Body



 Lifetime Warranty on Body

**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-cast aluminum  
 Finish: Grey  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor






**Product Options:**

CCT: 3000K - 6000K  
 Finish: White, Black  
 Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Glor</b>	20245	3W	3000K	240lm	260mA	90°	L:117xW:33x H:117mm	-

AC220-240V IP65  CRI>90 PF>0.5

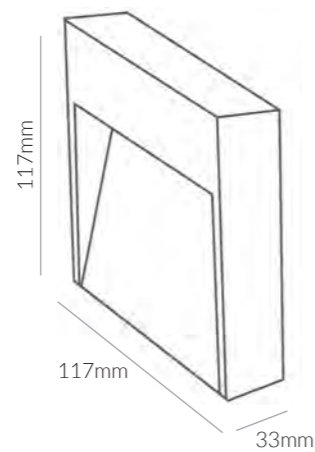

**Glor**  
 Surface Mounted

**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-cast aluminum  
 Finish: Grey  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor








**Product Options:**

CCT: 3000K - 6000K  
 Finish: White, Black  
 Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Cario</b>	20246	6W	3000K	480lm	260mA	20°	L:160xW:63x H:160mm	150x60mm

AC220-240V IP65  CRI>90 PF>0.5

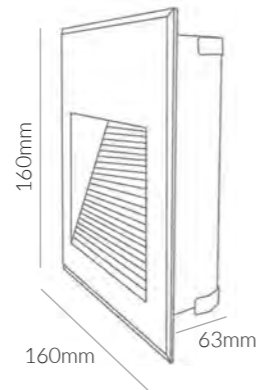

Cutout: 150x60mm

**Product Specifications:**


Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-cast aluminum  
 Finish: Grey  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor




**Product Options:**

CCT: 3000K - 6000K  
 Finish: White, Black  
 Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Jerez</b>	20244	3W	3000K	240lm	260mA	90°	L:100xW:60x H:162mm	155x95mm

AC220-240V IP65  CRI>90 PF>0.5

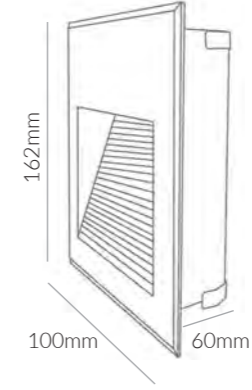

Cutout: 155x95mm



VERA

SYV | Outdoor Step

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminum Alloy  
 Finish: Matt White & Grey  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor

**Product Options:**


CCT: 3000K - 6000K  
 Finish: Black  
 Control: DALI / 1-10V / Triac / PWM



SKU 20238



SKU 20240



SKU 20239




SKU 20241


	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vera	20238	1W	3000K	80lm	290mA	60°	Ø:45 x H:60mm	Ø40
	20239	1W	3000K	80lm	290mA	60°	Ø:45 x H:60mm	Ø40
	20240	1W	3000K	80lm	290mA	60°	L:45xW:60x H:45mm	40x60mm
	20241	1W	3000K	80lm	290mA	60°	L:45xW:60x H:45mm	40x60mm

AC220-240V IP 65  CRI>90 PF>0.5

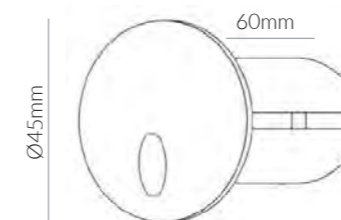

Cutout: Ø40mm

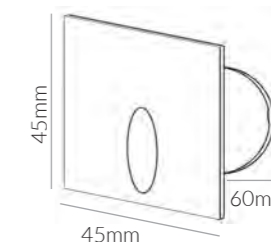

Cutout: 40x60mm

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +55°C  
 Material: Die-cast aluminum  
 Finish: Grey  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor







**Product Options:**


CCT: 3000K - 6000K  
 Finish: Black  
 Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Adra</b>	20242	3W	3000K	240lm	442mA	20°	L:185xW:40x H:44mm	L:170xW:33x H:41mm


AC220-240V IP65  CRI>90 PF>0.5

 SDCM <3  Class II  Ik10  CE

100mm

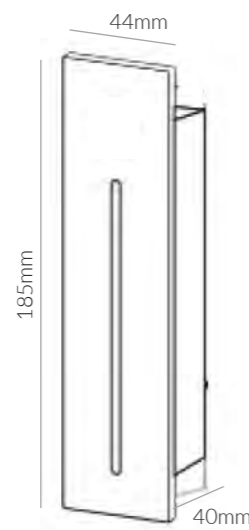


Cutout: L:170xW:33xH:41mm

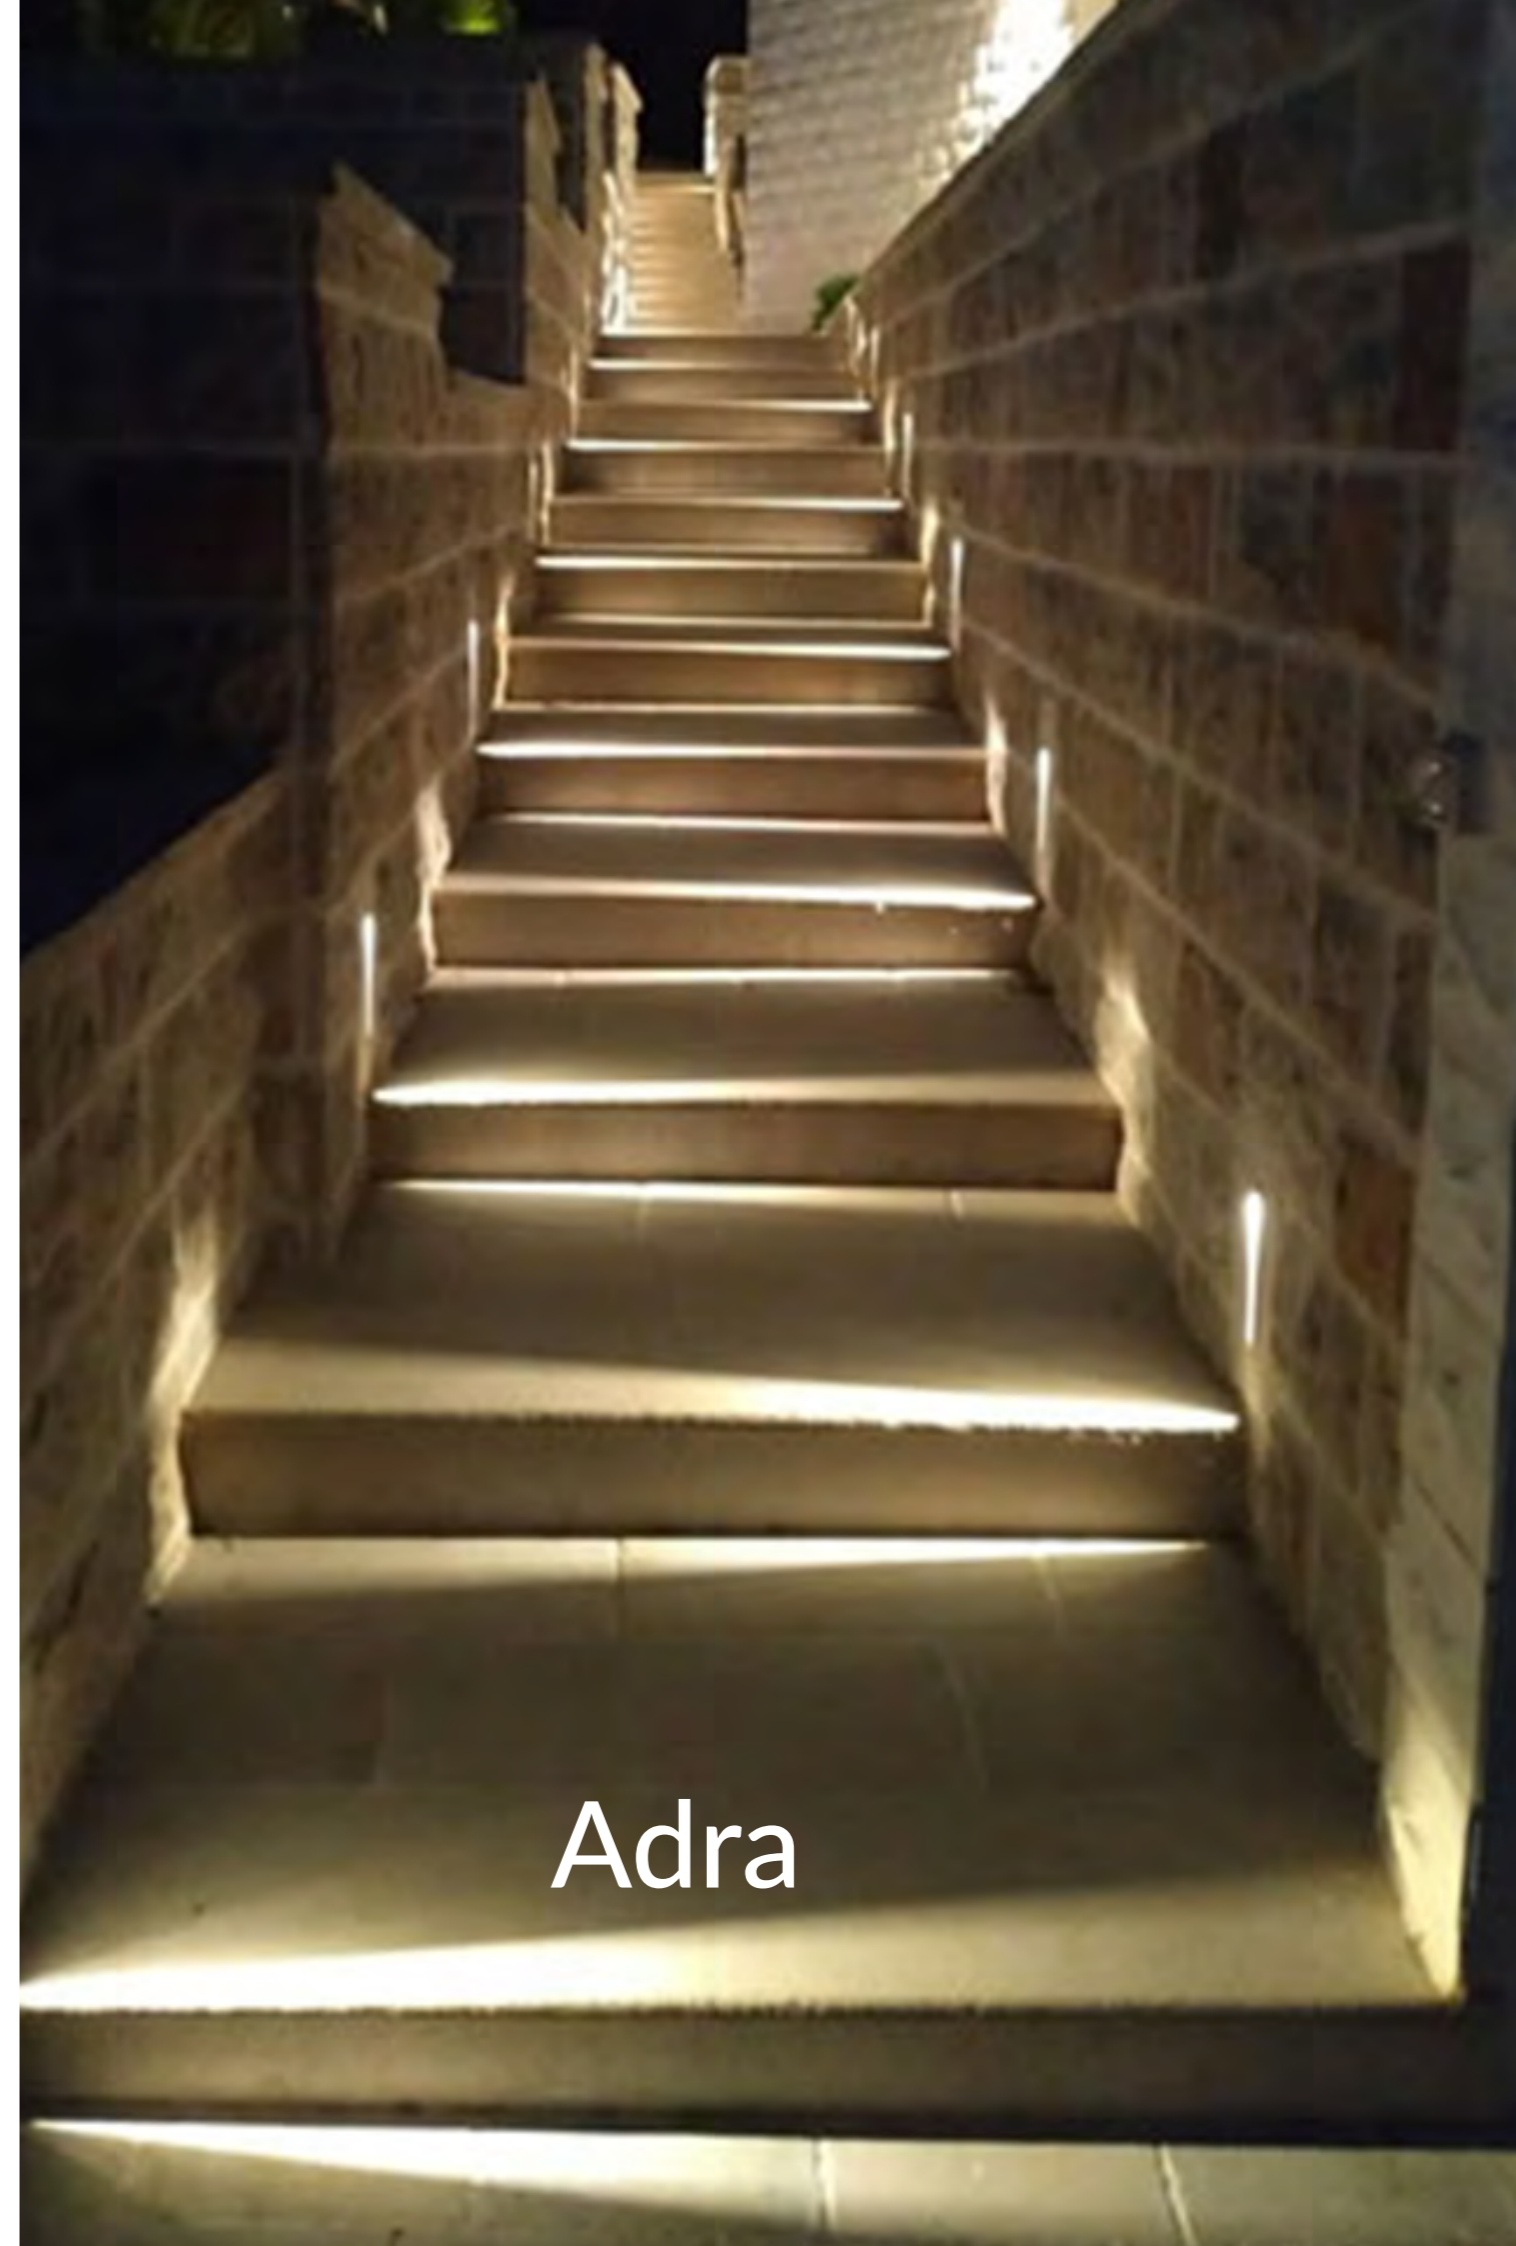

**Product Specifications:**

Lamp Type: EDISON LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-cast aluminum  
 Finish: Dark Grey  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor





**Product Options:**

CCT: 3000K - 6000K  
 Finish: White, Black  
 Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Elda</b>	18560	5W	3000K	80lm	60mA	120°	L: 100 x W: 85.5 x H: 100mm	88x88

AC220-240V IP65 90° CRI>80 PF>0.5

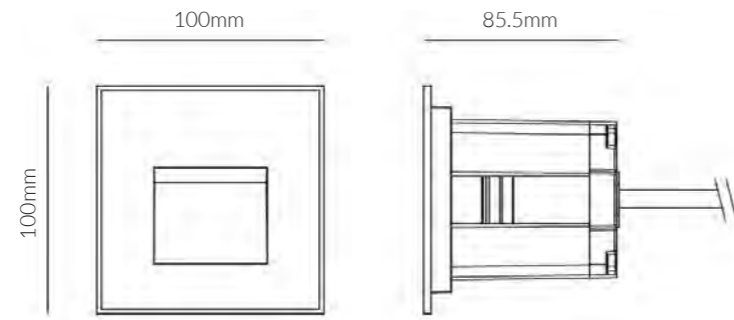

Cutout: 88x88mm

**Product Specifications:**

Lamp Type: EDISON LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-cast aluminum  
 Finish: Dark Grey  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor




**Product Options:**


CCT: 3000K - 6000K  
 Finish: Silver Grey, Black  
 Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Vic</b>	18559	3W	3000K	630lm	51mA	120°	L: 311 x W: 52 x H: 66mm	303x58

AC220-240V IP65 20° CRI>90 PF>0.5

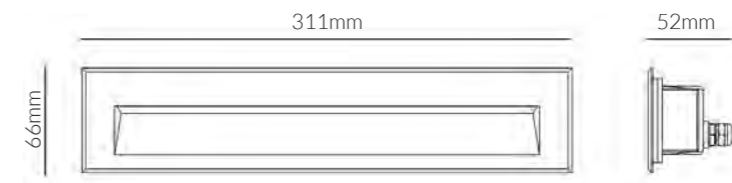

Cutout: 303x58mm

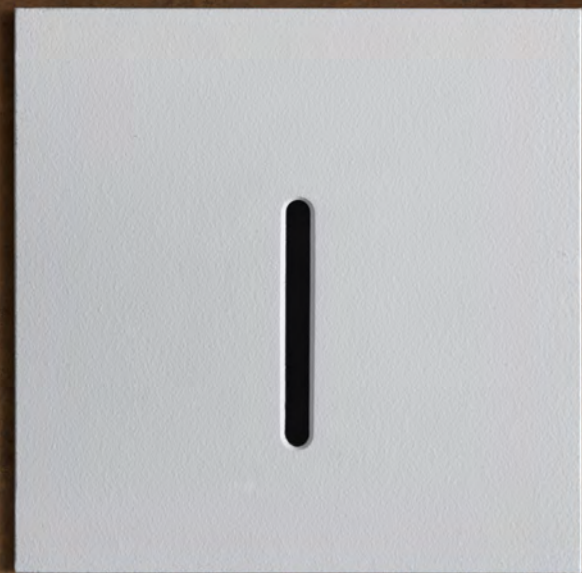

Coria

# MAGNETIC STEP LIGHT

**Product Specifications:**


Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-cast aluminum  
 Finish: White & Black  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Staircase, Sidewalk, Corridor

**Product Options:**

CCT: 3000K - 6000K  
 Control: DALI / 1-10V / Triac / PWM



**FACEPLATE OPTIONS**



SKU 20230  
 Beam 48.9°  
 Dimension 90x90x50mm  
 Material Die Cast Aluminium  
 Finish Sand White  
 IP Rating 65  
 Warranty 5 Years



SKU 20231  
 Beam 48.9°  
 Dimension 90x90x50mm  
 Material Die Cast Aluminium  
 Finish Grey  
 IP Rating 65  
 Warranty 5 Years






SKU 20232  
 Beam 34.6°  
 Dimension 90x90x50mm  
 Material Die Cast Aluminium  
 Finish Sand White  
 IP Rating 65  
 Warranty 5 Years




SKU 20233  
 Beam 34.6°  
 Dimension 90x90x50mm  
 Material Die Cast Aluminium  
 Finish Grey  
 IP Rating 65  
 Warranty 5 Years

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Coria	20228	3W	3000K	240lm	-	120°	Ø86x50mm	Ø68mm
	20228	3W	3000K	240lm	-	120°	Ø86x50mm	Ø68mm


AC220-240V IP65 CRI>80 PF>0.5

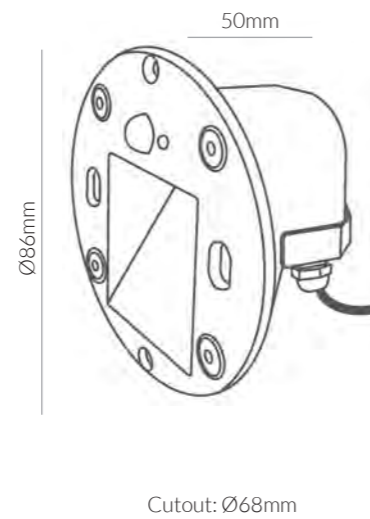

SKU 20234  
 Beam 34.6°  
 Dimension Ø90x50mm  
 Material Die Cast Aluminium  
 Finish Sand White  
 IP Rating 65  
 Warranty 5 Years



SKU 20235  
 Beam 34.6°  
 Dimension Ø90x50mm  
 Material Die Cast Aluminium  
 Finish Grey  
 IP Rating 65  
 Warranty 5 Years



SKU 20236  
 Beam 35.3°  
 Dimension Ø90x50mm  
 Material Die Cast Aluminium  
 Finish Sand White  
 IP Rating 65  
 Warranty 5 Years



SKU 20237  
 Beam 35.3°  
 Dimension Ø90x50mm  
 Material Die Cast Aluminium  
 Finish Grey  
 IP Rating 65  
 Warranty 5 Years





**CEILING**

**Product Specifications:**

Lamp Type: SAMSUNG LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminum  
 Diffuser: Tempered Glass  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality


**Product Options:**

Wattage: 9W  
 Finish: Silver / White / Rust  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Teja	15560	15W	3000K	1,275lm	350mA	110°	235x235x42	-
	15382	15W	4000K	1,350lm	350mA	110°	235x235x42	-
	15383	15W	6000K	1,425lm	350mA	110°	235x235x42	-

AC220-240V IP 65 CRI>80 PF>0.9

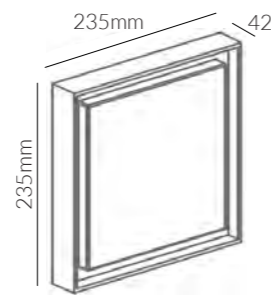

TEJA

**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium Body + PC  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 16W  
 Finish: Silver / White / Rust  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Agua</b>	14747	10W	3000K	900lm	45mA	107°	220x200x65	-
	15851	10W	4000K	950lm	45mA	107°	220x200x65	-
	15852	10W	6000K	1,000lm	45mA	107°	220x200x65	-

AC220-240V IP 65  CRI>80 PF>0.9

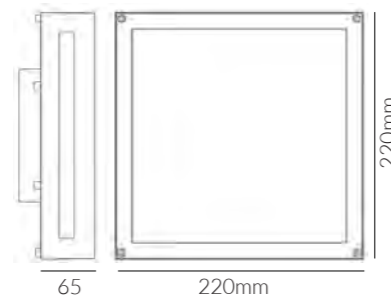

**Product Specifications:**

Lamp Type: EDISON LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminium Alloy  
 Diffuser: Opal PC  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

Finish: White  
 Control: Switchable / TRIAC / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Domo</b>	15540	25W	3000K	2,250lm	107mA	105°	Ø270x35	-
	15825	25W	4000K	2,375lm	107mA	105°	Ø270x35	-
	15826	25W	6000K	2,500lm	107mA	105°	Ø270x35	-

AC220-240V IP 65  CRI>80 PF>0.9



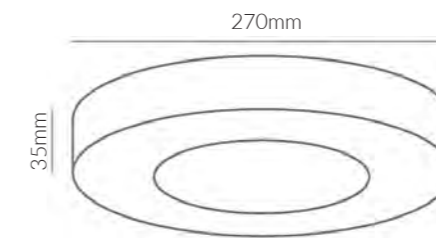

**Product Specifications:**

Lamp Type: E27 Par30  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminum  
 Diffuser: Tempered Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality

**Product Options:**

Finish: Black / Silver / White / Rust



13744





11193

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Ace</b>	13744	-	-	-	-	-	Ø108x140	-
	11193	-	-	-	-	-	Ø108x140	-

IP 65 Class I

IK08 CE

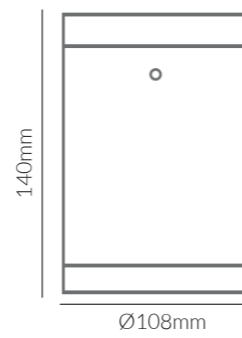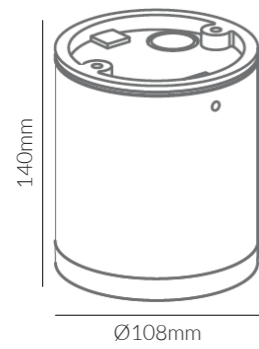

**Product Specifications:**

Lamp Type: GU10  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminum  
 Diffuser: Tempered Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality

**Product Options:**


Finish: Black / Silver / White / Rust



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Kugel</b>	13742	-	-	-	-	-	Ø90x130	-

IP 65 Class I

IK08 CE

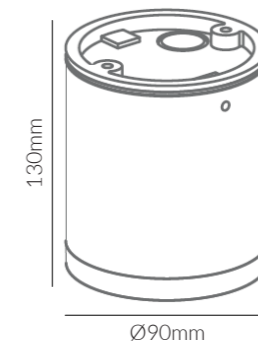

**Product Specifications:**


Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Extruded Aluminum Alloy #6063  
 Reflector: : Optical reflector. efficiency≥85%  
 Painting: Powder coating ,T= 60-80 um  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 30W  
 Beam Angle: 9° / 15° / 20° / 45° / 60°  
 Finish: Sanded Black / Sanded White  
 Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Cofa</b>	15410	6x5W	3000K	3,000lm	146mA	30°	Ø160x200	-
	15837	6x5W	4000K	3,150lm	146mA	30°	Ø160x200	-
	15838	6x5W	6000K	3,300lm	146mA	30°	Ø160x200	-

AC220-240V IP 65  CRI>80 PF>0.9

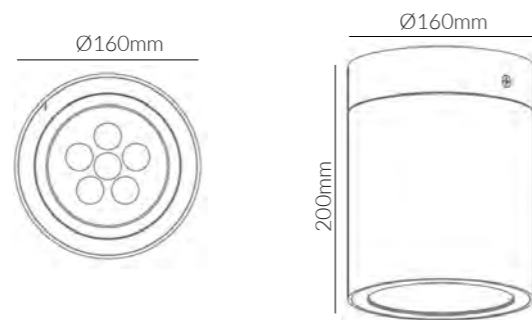

**Product Specifications:**

Lamp Type: PHILIPS LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Concrete body  
 Finish: Dark Grey Granite  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

CCT: 3000K-6000K  
 Beam: 15° / 24° / 36°  
 Finish: White Sandstone, Black Sandstone, Natural Grey, Travertine effects  
 Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Arnel</b>	19145	9W	3000K	1080lm	250mA	55°	Ø102x120	-

AC220-240V IP65 CRI>80 PF>0.9

SDCM <5 Class I IK05 CE

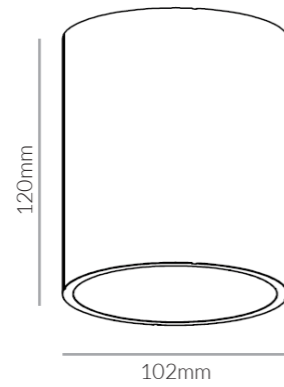

**ARNEL**  
 Lifetime Warranty on Body

**Product Specifications:**

Lamp Type: GU10  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminum  
 Diffuser: Tempered Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

Finish: Black / Silver / White / Rust

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Quadret	13743	-	-	-	-	-	Ø65x90	-


IP 65     

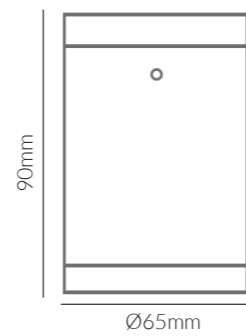





# FARO WITH SENSOR

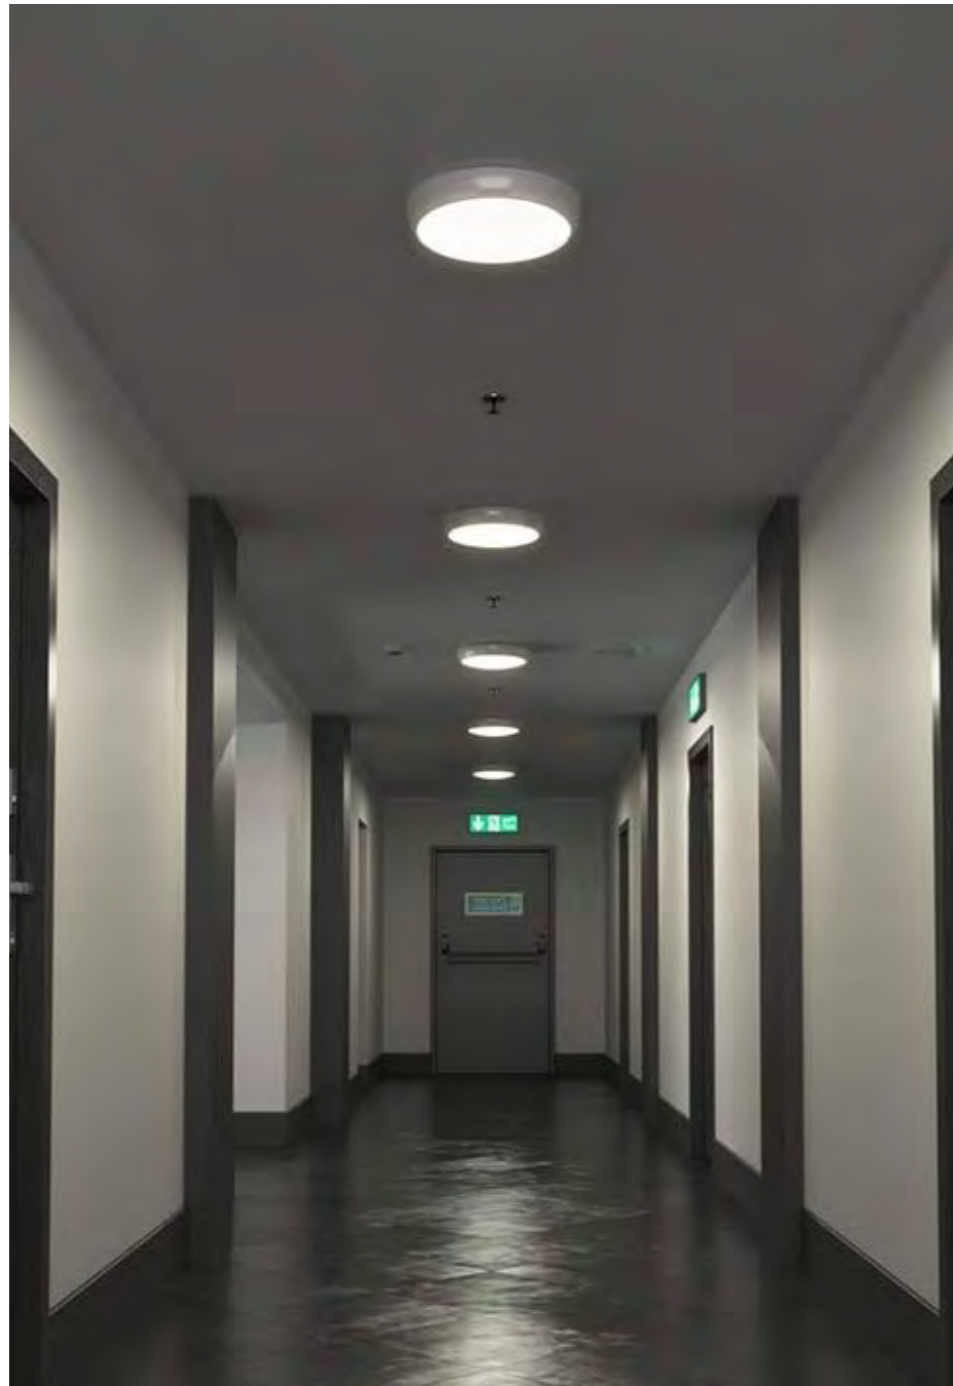

**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Polycarbonate Body  
 Finish: White  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



**Product Options:**

Wattage: 14W / 30W  
 CCT: 3000K - 6000K  
 Finish: Black  
 Control: Switchable / TRIAC / 1-10V / DALI  
 Optional: 3 Hours Emergency Back-up Kit / Microwave Sensor


		SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Faro	(Dimming Sensor)	16751	20W	4000K	1,800lm	300mA	120°	Ø300x93.5	-
	(On/Off)	15188	20W	6500K	2,000lm	300mA	120°	Ø300x93.5	-
	(Dimming Sensor)	16752	20W	6500K	2,000lm	300mA	120°	Ø300x93.5	-

AC220-240V IP66  CRI>80 PF>0.9

**Sensor Details:**

Hold Time : 5s/1min/2min/3min  
 Sensing Range: 50% / 100%  
 Daylight Sensor: 25 lux/disbale  
 Mounting Height: Ceiling Mount: 2.5 - 6m  
 Detection Area: 4-10m (Mounting Height - 3m)



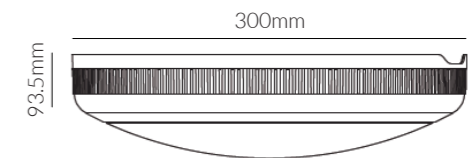

ALMORA

SYV | Outdoor Ceiling

**Product Specifications:**

Lamp Type: EPISTAR LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: ABS Body  
 Finish: Black & White  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



SKU 18888



SKU 18887


**Product Options:**

Wattage: 40W / 50W  
 Control: Switchable / TRIAC / 1-10V / DALI  
 Optional: 3 Hours Emergency Back-up Kit / Microwave Sensor

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Almora	18888	30W	3000K/4000K/ 6000K	100-110lm/W	256mA	120°	Ø280x50	-
	18887	30W	3000K/4000K/ 6000K	100-110lm/W	256mA	120°	Ø280x50	-

AC220-240V IP 65  CRI>80 PF>0.9



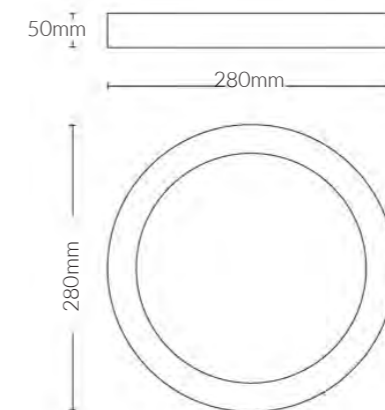

**COMPOUND**



VIDA

SYV | Outdoor Compound Lights

Product Specifications:


Lamp Type: E27  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium+Frost PC  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Compound top, Boundary, Pillar, Fence



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vida	17574	-	-	-	-	-	227x225	-

IP 65 

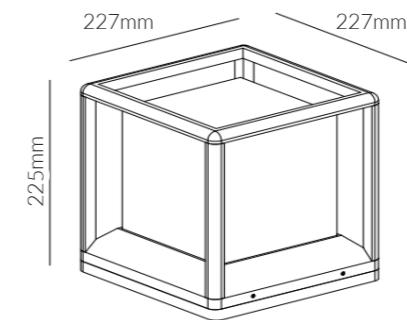


**Product Specifications:**

Lamp Type: E27  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium+Frost PC  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Compound top, Boundary, Pillar, Fence



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Felix</b>	18092	-	-	-	-	-	Ø90x350	-

IP 65

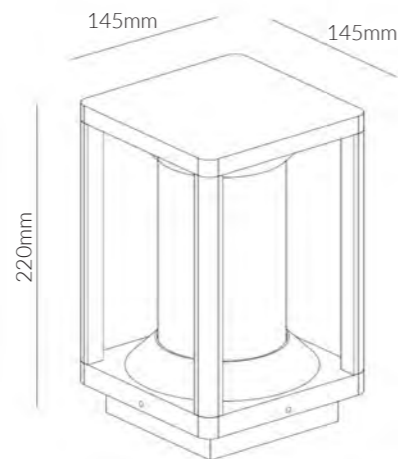


**Product Specifications:**

Lamp Type: E27  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium+Frost PC  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Compound top, Boundary, Pillar, Fence



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Canyon</b>	18092	-	-	-	-	-	Ø90x350	-

IP 65

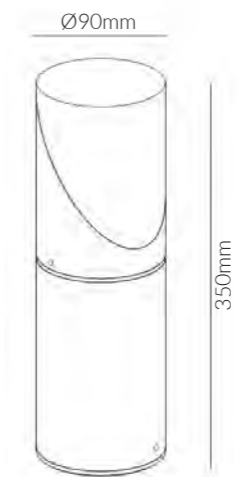



**WARFEL**

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminum body+ Opal PC Diffuser  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

CCT: 3000K - 6000K  
 Finish: White  
 Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Warfel</b>	14473	12W	3000K	1,100lm	300mA	-	180x230	-

AC220 240V IP 65  CRI>80 PF>0.9



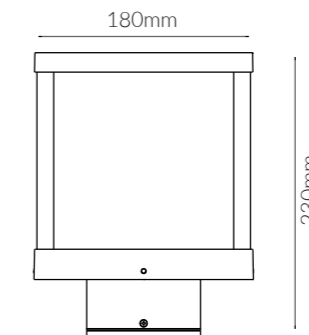

JARRA

SYV | Outdoor Tree Ring Light

Product Specifications:

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium + PC  
 Finish: Black  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoors, Commercial, Retail, Residential, Hospitality




Product Options:

Wattage: 3000K - 6000K  
 Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Jarra	15469	9W	3000K	810lm	350mA	185°	Ø95x124	-

AC220 240V IP 65  CRI>80 PF>0.9

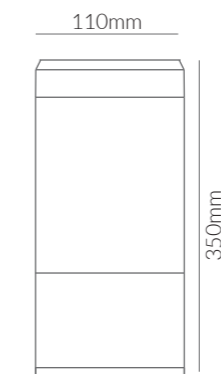

**Product Specifications:**

Lamp Type: Lumileds  
 Driver: Philips  
 Operating Temp.: -20°C ~ +50°C  
 Material: Concrete Body  
 Finish: Dark Grey Granite  
 Warranty: 5 Years on LED  
 Lifetime Warranty on the Body  
 Applications: Compound top, Boundary, Pillar, Fence




**Lifetime Warranty on Body**

**Product Options:**

Wattage: 3000K - 6000K  
 Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Pezzo</b>	19329	20W	3000K	1,340lm	500mA	270°	Ø192x540	-

AC220 240V IP 65 CRI>80 PF>0.9

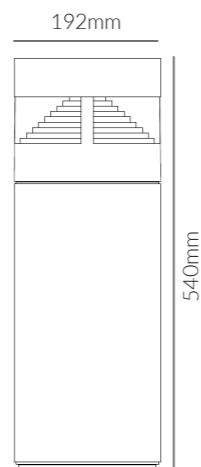

**Product Specifications:**

Lamp Type: Lumileds  
 Driver: Philips  
 Operating Temp.: -20°C ~ +50°C  
 Material: Concrete Body  
 Finish: Dark Grey Granite  
 Warranty: 5 Years on LED  
 Lifetime Warranty on the Body  
 Applications: Compound top, Boundary, Pillar, Fence




**Lifetime Warranty on Body**

**Product Options:**

Wattage: 3000K - 6000K  
 Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Petto</b>	19331	20W	3000K	1,340lm	500mA	250°	Ø192x590	-

AC220 240V IP 65 CRI>80 PF>0.9

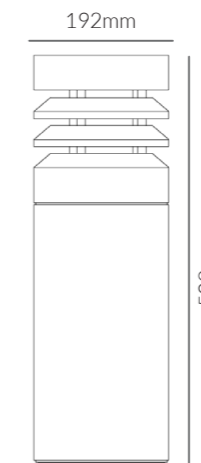



# LIFETIME WARRANTY ON BODY





**SPIKE**

**Product Specifications:**


Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: 6063 Aluminium Body  
 Finish: Matt Black  
 Lifespan: 50,000 Hours  
 Warranty: 10 Years  
 Applications: Outdoor, Gardens, Pathways, etc.

**Product Options:**

Wattage: 4W - 15W  
 CCT: 3000K - 6000K  
 Control: Switchable / DALI / 1-10V / TRIAC





	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Teo	19162	3W	3000K	240lm	-	10°- 45°	Ø42 x L:82 x H:89mm	-
	19521	10W	3000K	800lm	-	10°- 45°	Ø69 x H:99mm	-

AC220 240V IP 66  10-45° CRI>80 PF>0.9




3W

10W

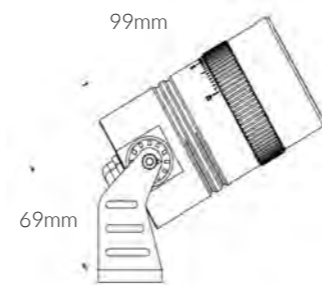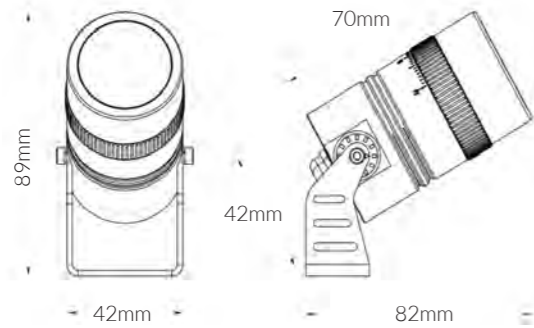

# TEO

Zoomable Flood & Spike Light

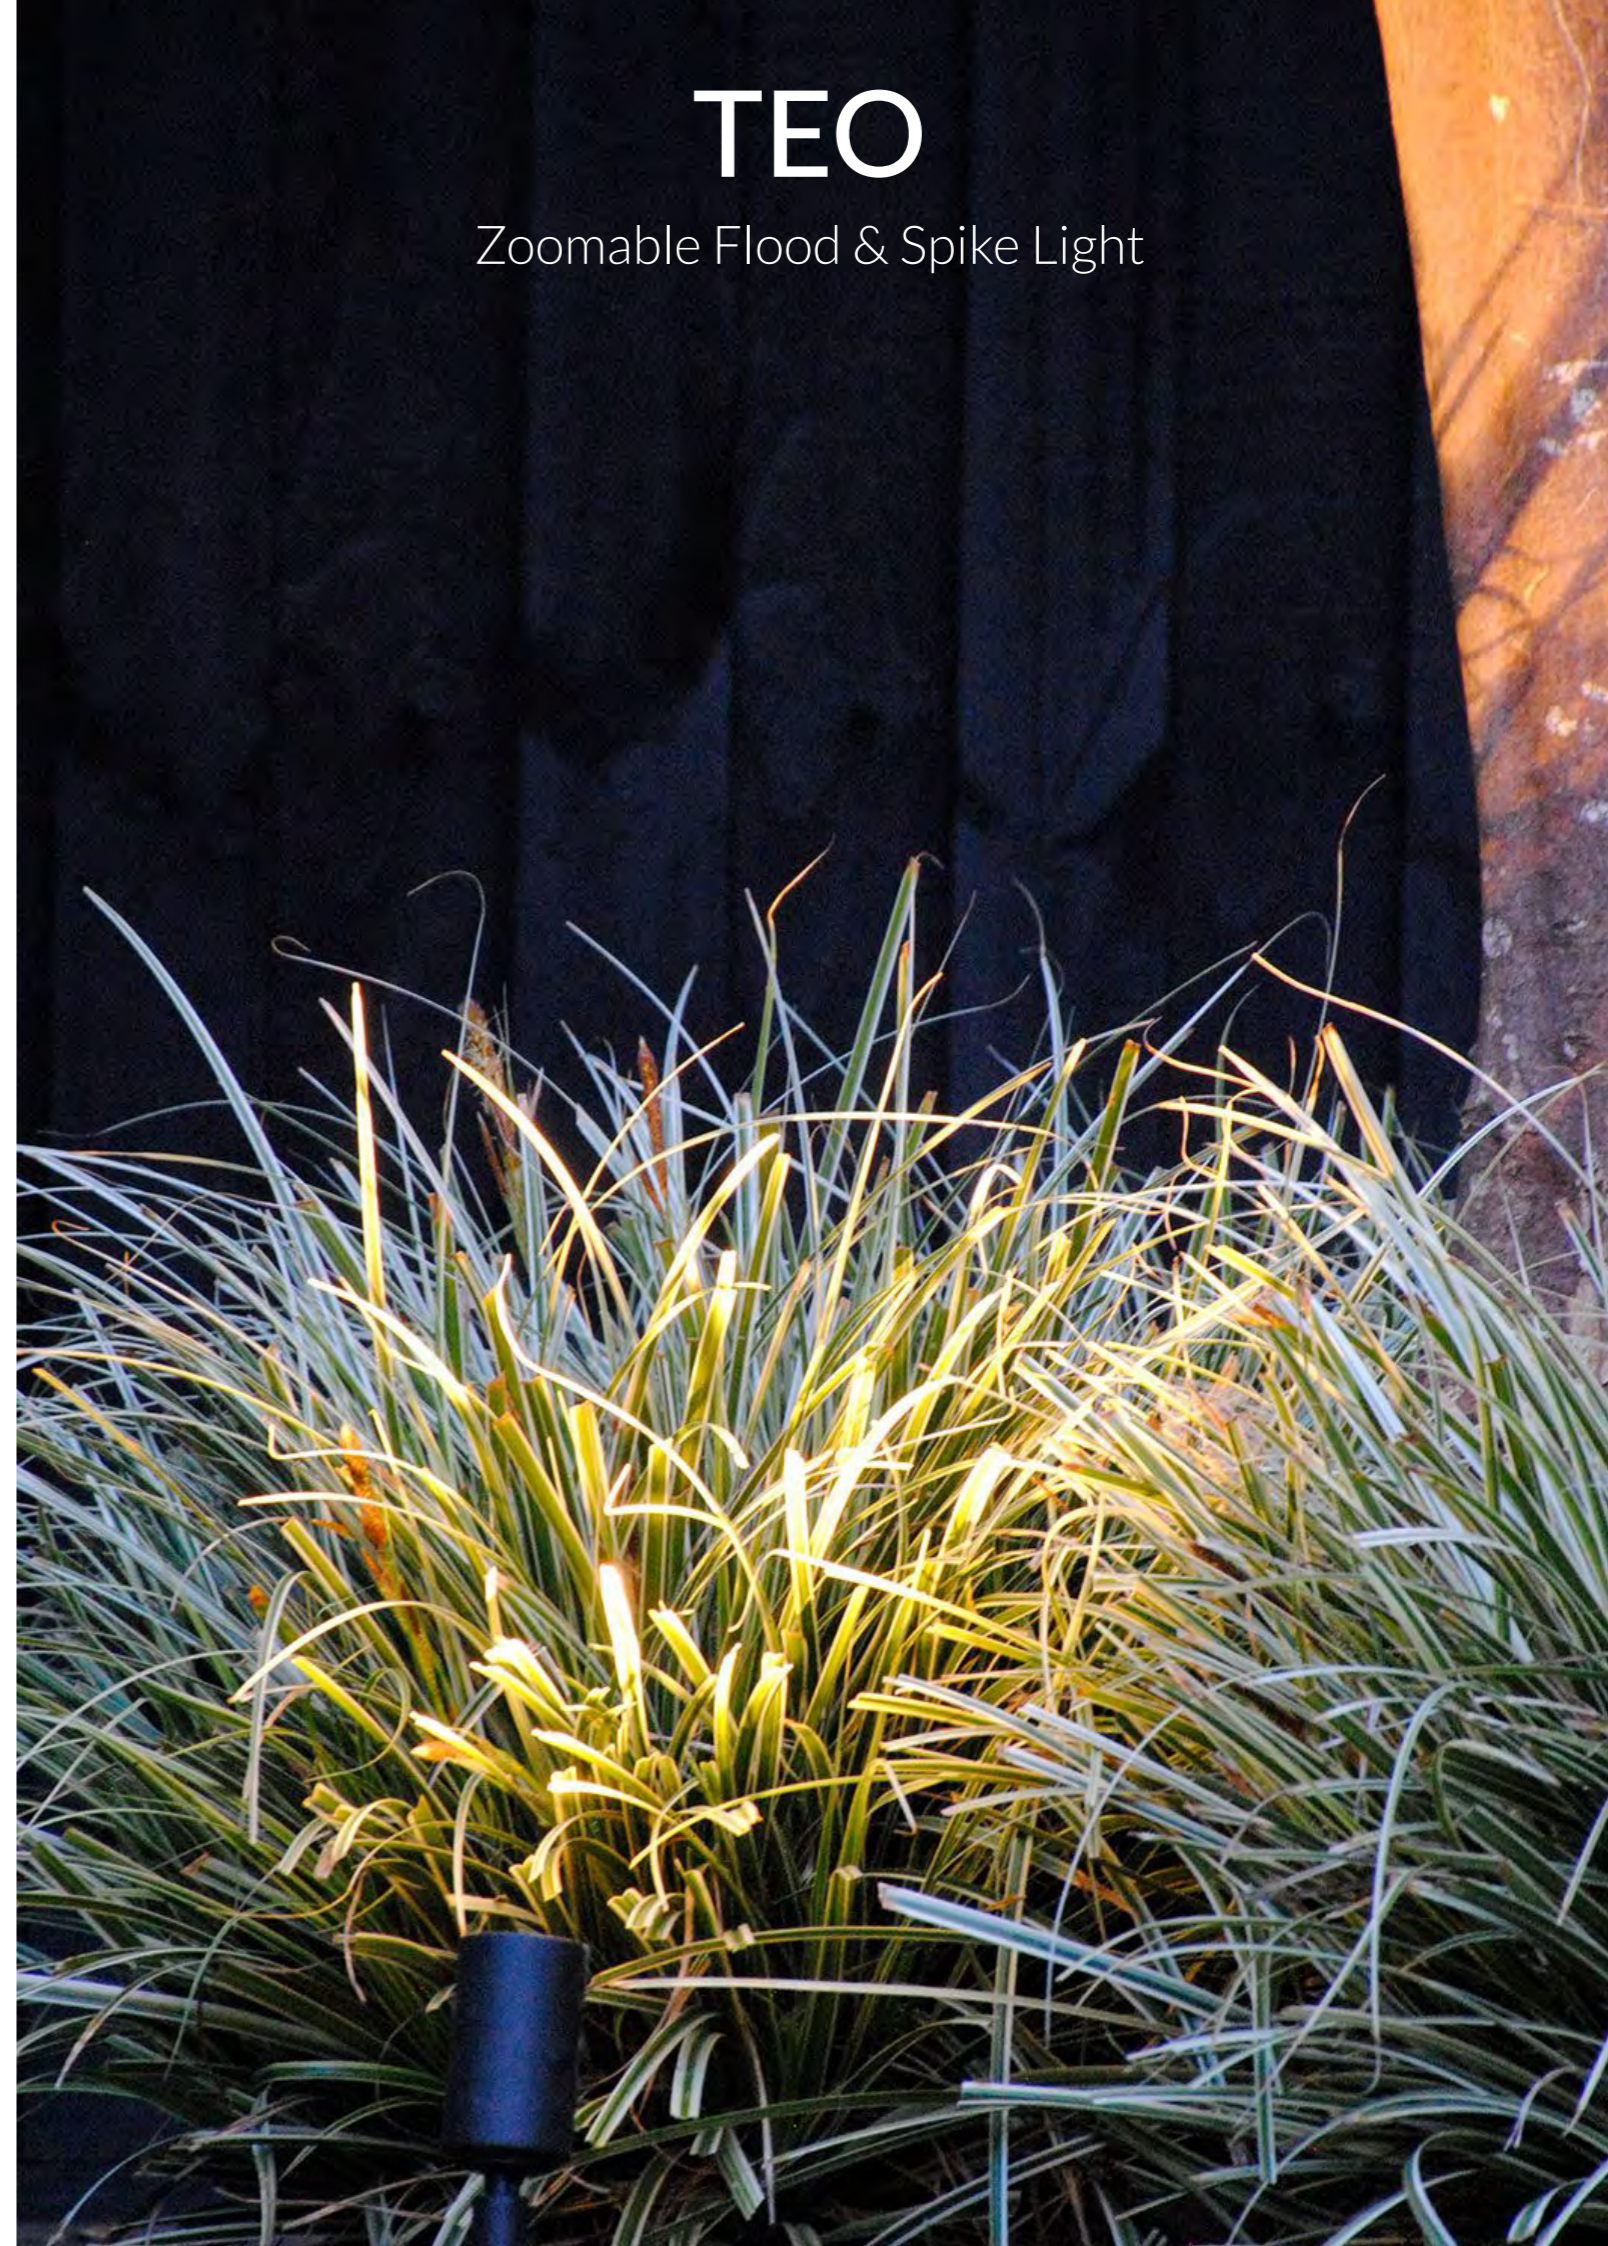

# ELMO



Non-Zoomable  
Flood & Spike Light

## SYV | Outdoor Spike Lights

### Product Specifications:

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium + Tempered Glass  
 Finish: Black  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting




### Product Options:

Wattage: 4W  
 CCT: 3000K - 6000K, RGB, RGBW  
 Beam Angle: 15° / 36° / 60°  
 Finish: Dsrk Grey / Matt Silver  
 Control: Switchable / 1-10V / DALI / TRIAC / PWM  
 Mounting Type: U bracket & mounting plate for solid ground, spike for soft ground

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Elmo	19946	3W	3000K	240lm	300mA	24°	Ø42 xH:345mm	-
	19947	10W	3000K	800lm	250mA	36°	Ø69 xH:389mm	-

AC220-240V IP 66 CRI>80 PF>0.9

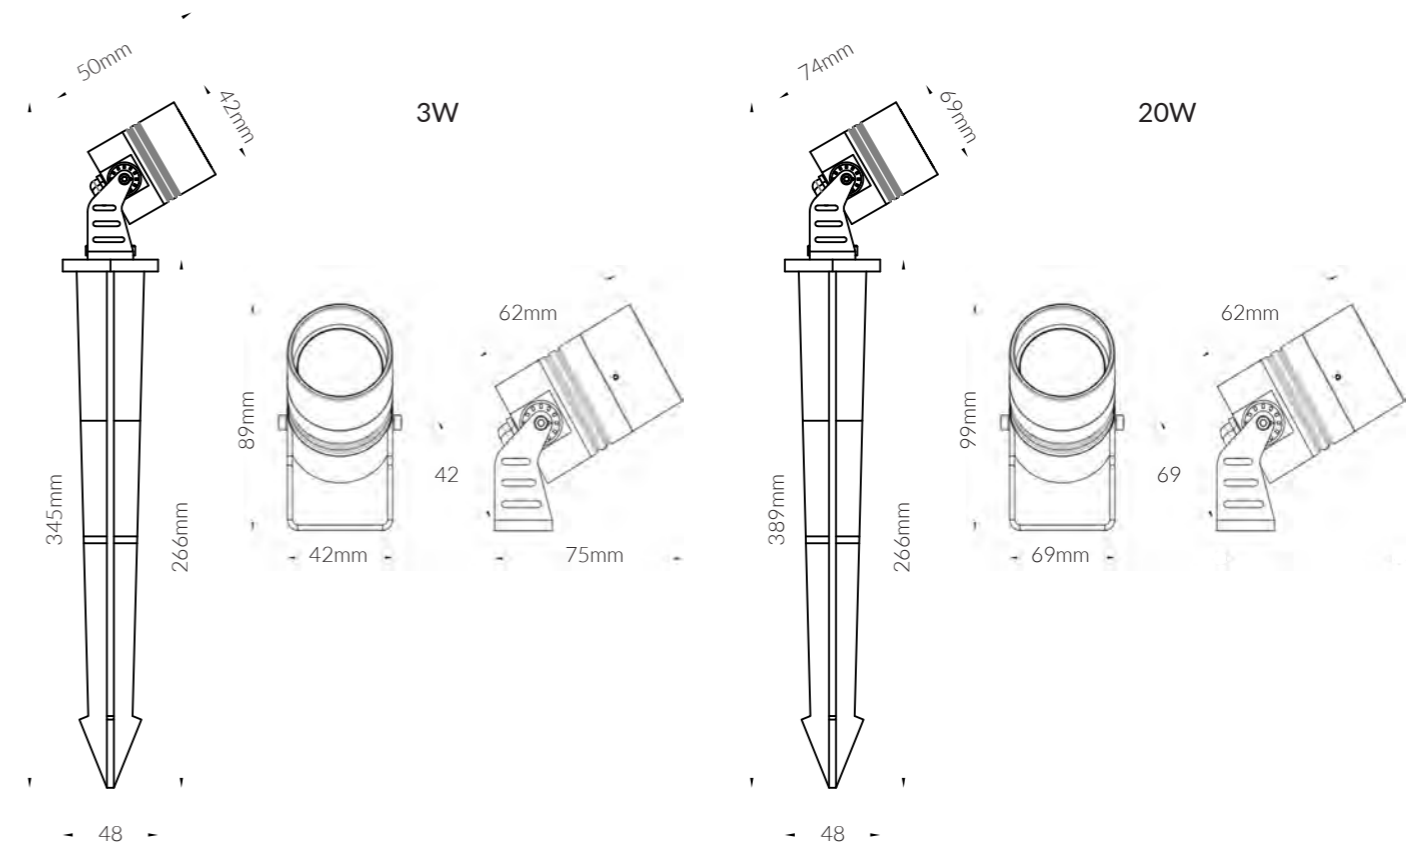

**Product Specifications:**






Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium body + Honeycomb Louvre  
 Finish: Dark Brown  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Outdoor, Gardens, Pathways, etc.


**Product Options:**

Wattage: 10W / 20W / 30W / 40W / 60W  
 CCT: 3000K - 6000K  
 Beam Angle: 15° / 18° / 36° / 60°  
 Control: Switchable / DALI / 1-10V / TRIAC  
 Mounting: Pole Coupler, Candlestick Mount, Tree Mount



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Kevin	18759	12W	3000K	1,200lm	250mA	30°	Ø95 x L:124 x H:199mm	-

AC220 240V IP 66  CRI>80 PF>0.9    

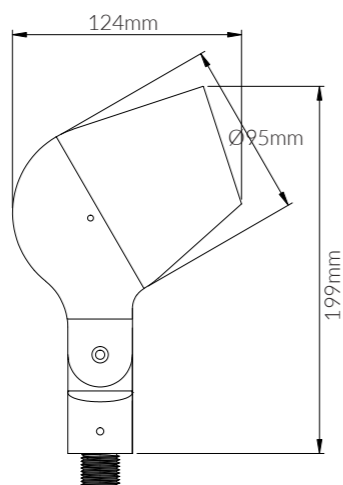

# KEVIN

with Honeycomb Louvre




**Product Specifications:**

Lamp Type: GU10  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium body+ Temper Glass  
 Finish: Dark Grey  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Speren</b>	13580	-	-	-	-	-	Ø100x156x390	-

IP 65

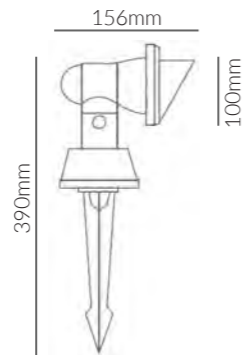


**Product Specifications:**

Lamp Type: 2 x E27 PAR30  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum body+Tempered Glass  
 Finish: Black  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Eolo</b>	12106	-	-	-	-	-	363x400	-

IP 65

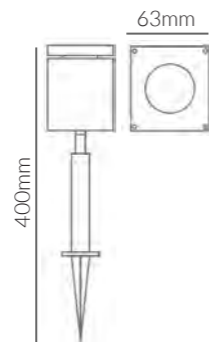

**SPEREN/  
EOLO**

**Product Specifications:**


Lamp Type: CITIZEN LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminium Body  
 Finish: Matt Black Anodized  
 Lifespan: 50,000 Hours  
 Warranty: 10 Years  
 Applications: Outdoor, Gardens, Pathways, etc.




**Product Options:**

Wattage: 7W  
 CCT: 3000K - 6000K  
 Beam Angle: 15° / 24° / 36° / 60°  
 Control: Switchable / DALI / 1-10V / TRIAC  
 Accessories: Linear glass lens, Soften glass lens & Honeycomb louver

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Corzo</b>	16839	5W	3000K	450lm	120mA	20°	Ø76x169	-
	17593	12W	3000K	1,250lm	120mA	20°	Ø86x199	-

AC220 240V IP 67  CRI>80 PF>0.9

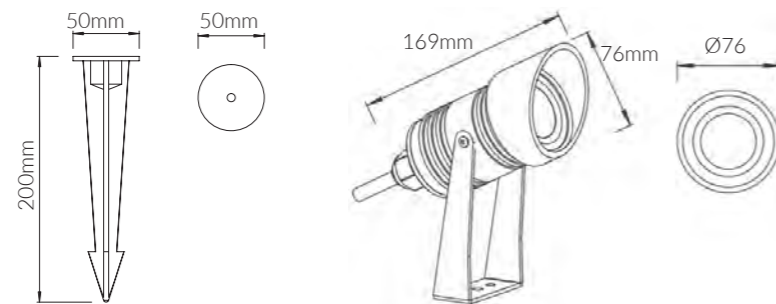

**Product Specifications:**

Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-cast Aluminum  
 Finish: Matte Silver  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Outdoor, Gardens, Pathways, etc.




**Product Options:**

Wattage: 1W / 3W / 8W / 9W / 10W / 15W  
 CCT: 3000K - 6000K  
 Beam Angle: 40° / 60°  
 Control: Switchable / DALI / 1-10V / TRIAC  
 Voltage: DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Garzon</b>	17076	5W	3000K	450lm	120mA	24°	Ø45x83	Ø35

DC 12V IP 67  CRI>80 PF>0.9



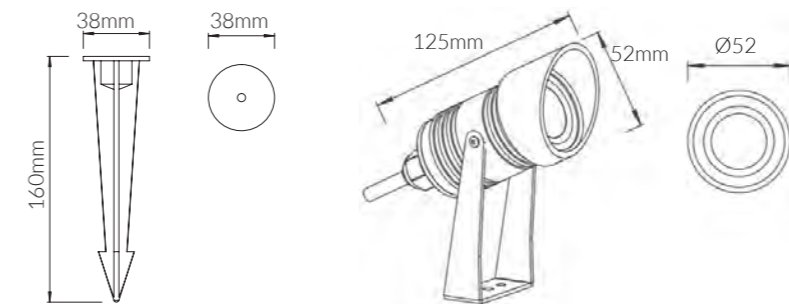

**STANO**  
in Bronze Finish

SYV | Outdoor Spike Lights

**Product Specifications:**

Lamp Type: MR16  
 Operating Temp.: -20°C ~ +50°C  
 Material: Brass Body  
 Finish: Bronze  
 Warranty: 10 Years  
 Applications: Driveways, Walkways, Pathways


Lens: Clear Convex  
 Socket: Bi Pin  
 Lead Wire: 3FT



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Stano	16588	-	-	-	-	-	Ø61x185	-

IP 65 

 SDCM <3  Class I  IK05  CE

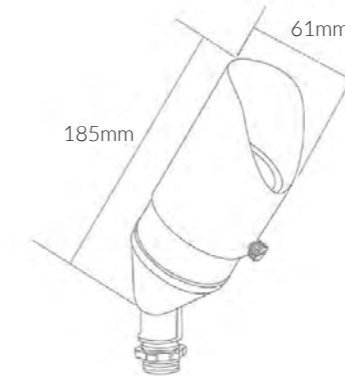





**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium body  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



**Product Options:**

Wattage: 12W / 20W / 40W  
 CCT: 3000K - 6000K  
 Beam Angle: 9° / 15° / 20° / 45°  
 Finish: Silver Grey / Black / White  
 Control: Switchable / 1-10V / DALI / TRIAC / PWM

# CLAVO

## FLOOD & SPIKE

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Clavo	15121	6W	3000K	540lm	65mA	30°	Ø70x144	-
	15122	20W	3000K	1,800lm	101mA	45°	Ø120x227	-
	15123	45W	3000K	4,050lm	186mA	45°	Ø160x265	-


AC220-240V IP65 30°/45° CRI>80 PF>0.9




**Optional Accessory: Spike**




6W

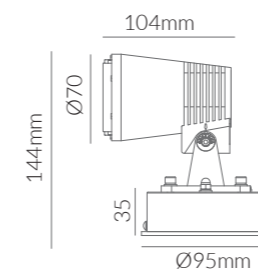

20W

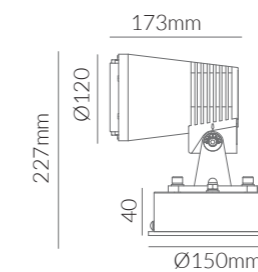

45W

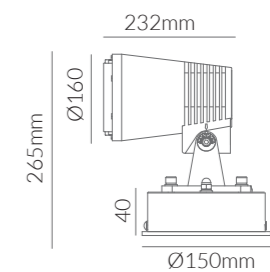

FEATURES





# TREE RING LIGHT

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die Cast Aluminium Body  
 Finish: Black  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Palm Trees




**Product Options:**

Wattage: 7W / 8W  
 CCT: 3000K - 6000K  
 Beam Angle: 15°/24°/36°/60°/40°\*70°  
 Ring Diameter: Ø300 | Ø400 | Ø500 or any customised size  
 Voltage: DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Árboles	16947	4x5W	3000K	4x550lm	-	30°	Ø55X173	-
	17563	8x5W	3000K	8x550lm	-	30°	Ø55X173	-

AC220 240V IP 66 CRI>80 PF>0.9

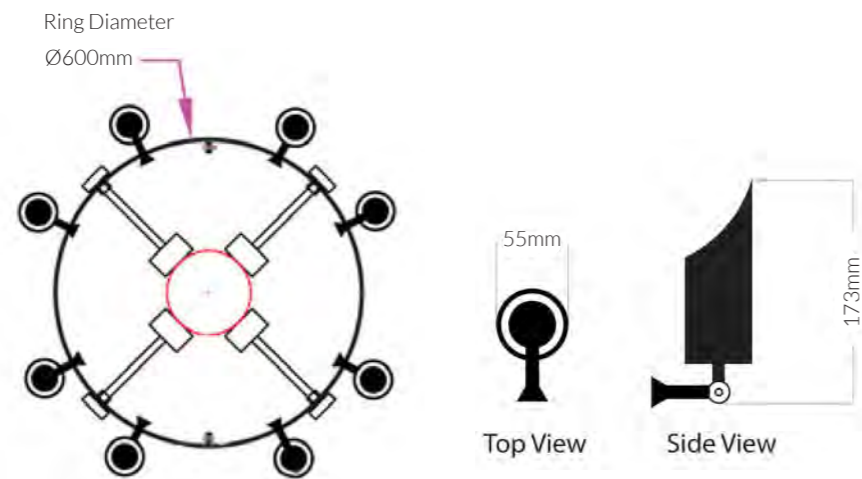

**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -25°C ~ +60°C  
 Material: Die-cast Aluminum  
 Diffuser: Tempered glass & Honeycomb  
 Finish: Dark Brown  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Palm Trees




**Product Options:**

Wattage: 10W / 20W  
 CCT: 3000K - 6000K  
 Beam Angle: 15°/24°/36°/60°/40°\*70°  
 Ring Diameter: Ø300 | Ø400 | Ø500 or any customised size  
 Voltage: DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Kevin	17912	4x10W	3000K	4x1100lm	-	30°	Ø95x124	-

AC220 240V IP 66 CRI>80 PF>0.9

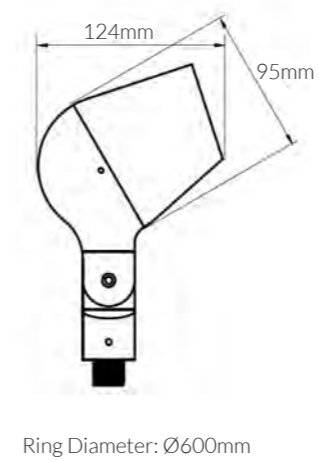



# UNDER WATER

**Product Specifications:**

Lamp Type: NICHIA LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Hard chrome-plated stainless steel #316  
 Finish: Chrome  
 Gasket: : Silicone gasket  
 Excellent heat conductivity aluminum.coefficient of heatConductivity≥2.0w/mk  
 Automatic Shutdown at 75°C  
 Temperature of water between -20°C~+50°C less than 1 meter depth  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Pools, Fountains


**Product Options:**

Wattage: 9W  
 CCT: 3000K - 6000K  
 Beam Angle: 15°/24°/45°/60°  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM  
 Accessory: Tripod Stand



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Voltage
Modo	20669	1x6W	3000K	780lm	416mA	30°	D: 95	DC12V
	20670	3x5.5W	3000K	1,815lm	770mA	30°	D: 127	DC24V
	20671	6x4.5W	3000K	2,970lm	1250mA	30°	D: 150	DC24V

IP 68 CRI>80

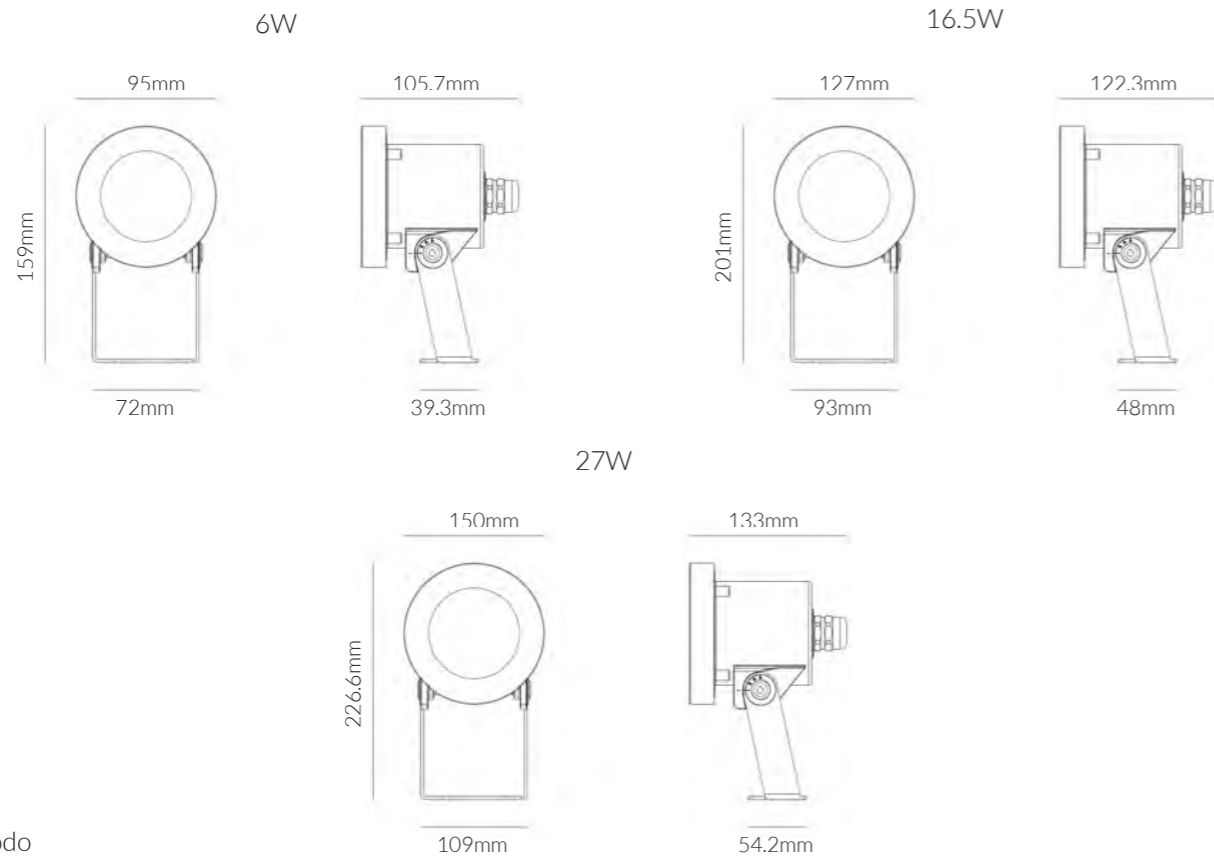

**MODO**



**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Hard chrome-plated stainless steel #316  
 Finish: Chrome  
 Gasket: : Silicone gasket  
 Cable Gland: PG-11 copper with nickel-coated  
 Excellent heat conductivity aluminum.coefficient of heatConductivity≥2.0w/mk  
 Automatic Shutdown at 75°C  
 Temperature of water between -20°C~+50°C less than 1 meter depth  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Pools, Fountains







**Product Options:**

Wattage: 16W/20W  
 CCT: 3000K - 6000K  
 Voltage: DC12V  
 Beam Angle: 20° / 25° / 35° / 45°  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI


	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Ello</b>	16516	8W	3000K	720lm	371mA	30°	D: 135	-
	16199	8W	RGB	640lm	R: 200mA, G: 215mA, B: 215mA	30°	D: 135	-

DC 24V IP 68  CRI>90





Built-in Radiator

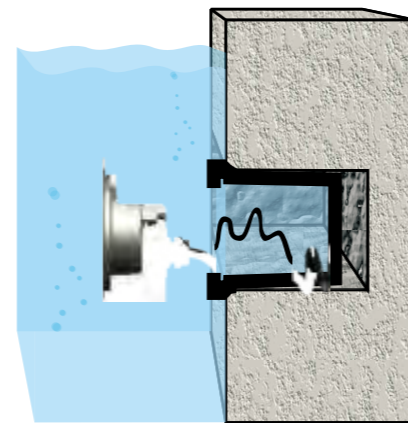

• Water must be allowed to go inside and outside sleeve freely without leaking to the other side.

•Warning : Must be installed under the water to prevent the light from being burnt off because of over-heating.

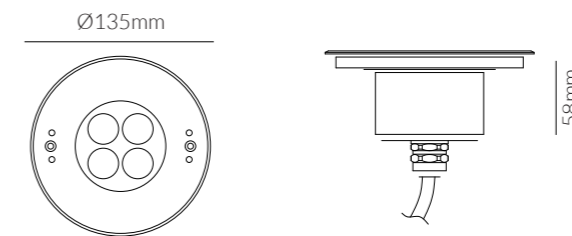

Mounting Sleeve 058

**ELLO**



**Product Specifications:**


Lamp Type: CREE LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Hard chrome-plated stainless steel #316  
 Finish: Stainless Steel  
 Excellent heat conductivity aluminum.coefficient of heatConductivity≥2.0w/mk  
 Temperature of water between -20°C~+50°C less than 1 meter depth  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Pools, Fountains




**Product Options:**

Beam Angle: 12° / 40° / 60°  
 CCT: 4000K, 6000K, RGB  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM  
 Accessory: Honeycomb louver / Half shading

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ela	19091	2W	3000K	200lm	60mA	25°	38 x 75mm	-

DC 24V IP 68  CRI>90

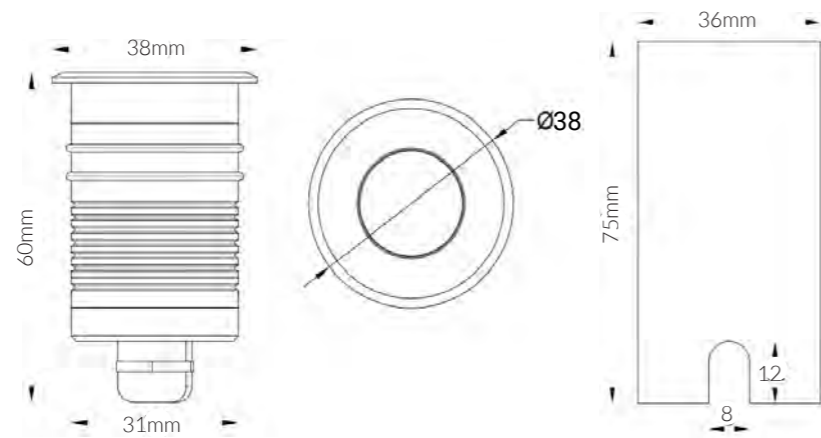

ELA



**Product Specifications:**

Lamp Type: EPISTAR LED  
 LED Qty: 252 Pcs  
 Operating Temp.: -20°C ~ +50°C  
 Energy Class: A  
 Material: Glass body  
 Finish: Chrome  
 Lifespan: 30,000 Hrs  
 Warranty: 3 Years  
 Applications: Outdoor, Pool, Fountains




**Product Options:**

Wattage: 24W / 35W  
 CCT: 3000K - 6000K, RGB  
 Voltage: AC24V, DC12V, DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Zona (Par56 LED Lamp)</b>	17311	18W	3000K	1,800lm	-	120°	Ø178x108	-

AC 12V IP 68  CRI>80

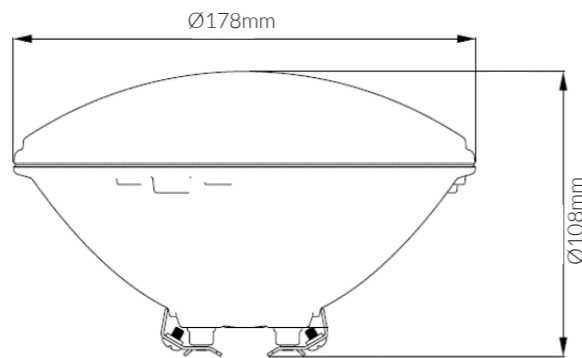

**Product Specifications:**

Lamp Type: EPISTAR LED  
 LED Qty: 144 Pcs  
 Operating Temp.: -20°C ~ +50°C  
 Energy Class: A  
 Material: #304 Stainless Steel Face Ring+Plastic Body  
 Finish: White  
 Lifespan: 30,000 Hrs  
 Warranty: 3 Years  
 Applications: Outdoor, Pool, Fountains




**Product Options:**

Wattage: 18W / 24W / 35W / 54W  
 CCT: 3000K - 6000K, RGB  
 Voltage: AC24V, DC12V, DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Mizar (Par56 LED Lamp)</b>	17312	30W	3000K	2,700lm	-	-	Ø280x160	-

AC 12V IP 68 CRI>80

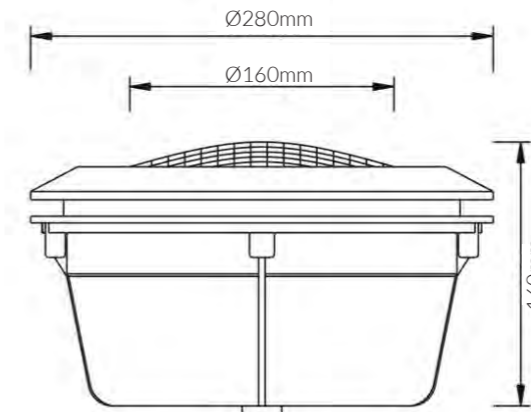

**Product Specifications:**

Lamp Type: EPISTAR LED  
 LED Qty: 252 Pcs  
 Operating Temp.: -20°C ~ +50°C  
 Material: Plastic Body  
 Finish: White  
 Lifespan: 30,000 Hrs  
 Warranty: 3 Years  
 Applications: Outdoor, Pool, Fountains




**Product Options:**

Wattage: 24W / 35W  
 CCT: 3000K - 6000K, RGB  
 Voltage: AC24V, DC12V, DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Franco</b>	17313	18W	3000K	1,800lm	-	120°	Ø178x108	-

AC 12V IP 68 CRI>80

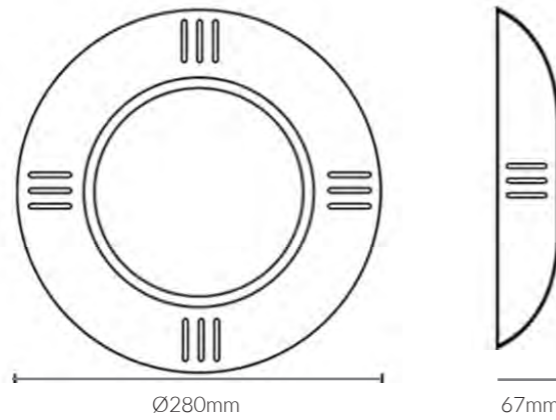

**Product Specifications:**

Lamp Type: EPISTAR LED  
 LED Qty: 108 Pcs  
 Operating Temp.: -20°C ~ +50°C  
 Material: Plastic Body  
 Finish: White  
 Lifespan: 30,000 Hrs  
 Warranty: 3 Years  
 Applications: Outdoor, Pool, Fountains




**Product Options:**

Wattage: 18W / 24W / 35W / 54W  
 CCT: 3000K - 6000K, RGB  
 Voltage: AC24V, DC12V, DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Mazimo</b>	17314	8W	RGB	720lm	-	-	Ø248x57	-

AC 12V IP 68 120° CRI>80

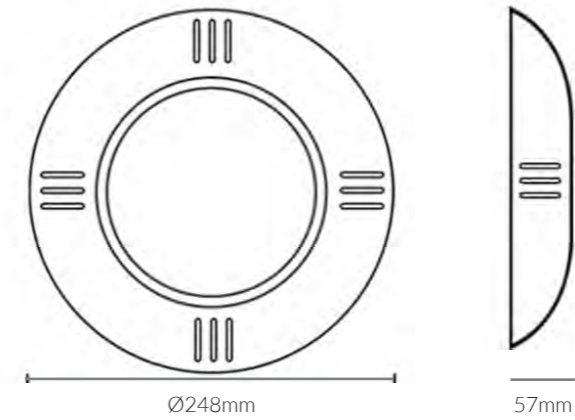



**WALL**

**WASHER**

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium Body+Stainless Steel 316+Tempered Glass  
 Gasket: Glass and housing are silicone sealed  
 Finish: Chrome  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality





**Product Options:**

Beam Angle: 20° / 25° / 30° / 45°  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Luvio	15192	12x1.5W	3000K	1,620lm	910mA	35°	L: 549	-
	15969	12x1.5W	4000K	1,710lm	910mA	35°	L: 549	-
	15970	12x1.5W	6000K	1,800lm	910mA	35°	L: 549	-
	15193	24x1.5W	3000K	3,240lm	1826mA	35°	L: 1025	-
	(DALI) 16831	24x1.5W	4000K	3,420lm	1826mA	12x50°	L: 1025	-
	16373	24x1.5W	6000K	3,600lm	1826mA	35°	L: 1025	-

DC 24V IP 67 CRI>80

SDCM <5 Class I IK07 Flicker Free CE

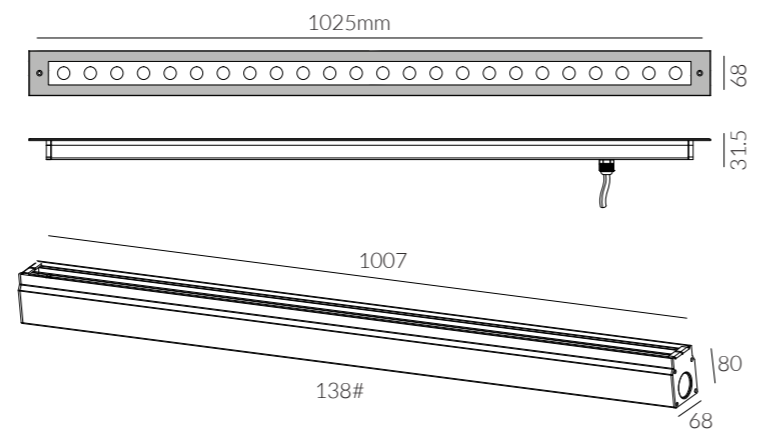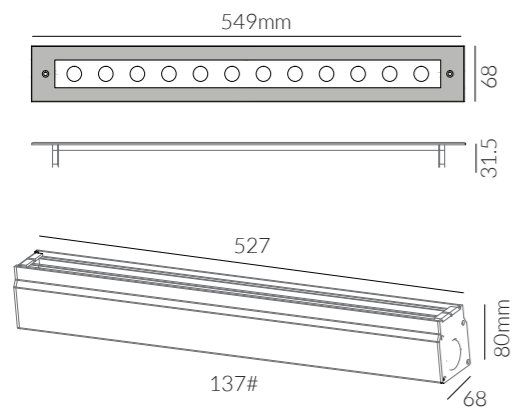

LUVIO



**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium Body+Stainless Steel 316+Tempered Glass  
 Gasket: Glass and housing are silicone sealed  
 Finish: Chrome  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 6x1.0W  
 Voltage: DC24V  
 Beam Angle: 15° / 20° / 50°  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Verso</b>	15194	12x1.0W	3000K	1,080lm	65mA	30°	L: 510	-
	15976	12x1.0W	4000K	1,140lm	65mA	30°	L: 510	-
	15977	12x1.0W	6000K	1,200lm	65mA	30°	L: 510	-
	15195	24x1.0W	3000K	2,160lm	163mA	30°	L: 985	-
	15978	24x1.0W	4000K	2,280lm	163mA	30°	L: 985	-
	15979	24x1.0W	6000K	2,400lm	163mA	30°	L: 985	-

AC220-240V IP66 CRI>80

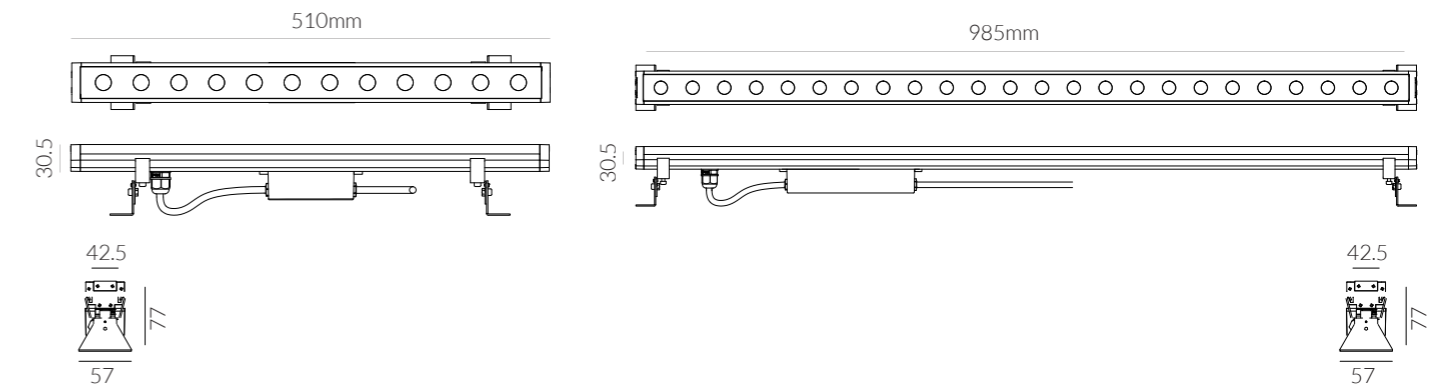

**VERSO**

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum  
 Finish: Silver  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality



**Product Options:**


Wattage: 48W/60W  
 CCT: 4000K-6000K, RGB  
 Beam Angle: 10x60° / 15x18°  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / DMX512

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Selina	19489	18W	3000K	1,620lm	-	15x45°	L: 504	-
	19490	36W	3000K	3,240lm	-	15x45°	L: 1000	-



AC220-240V IP 67  CRI>80

18W

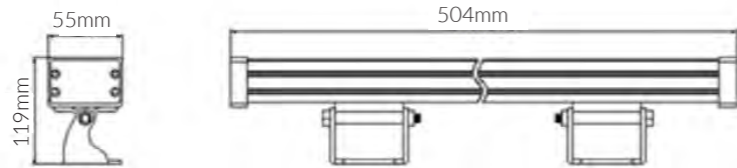

36W

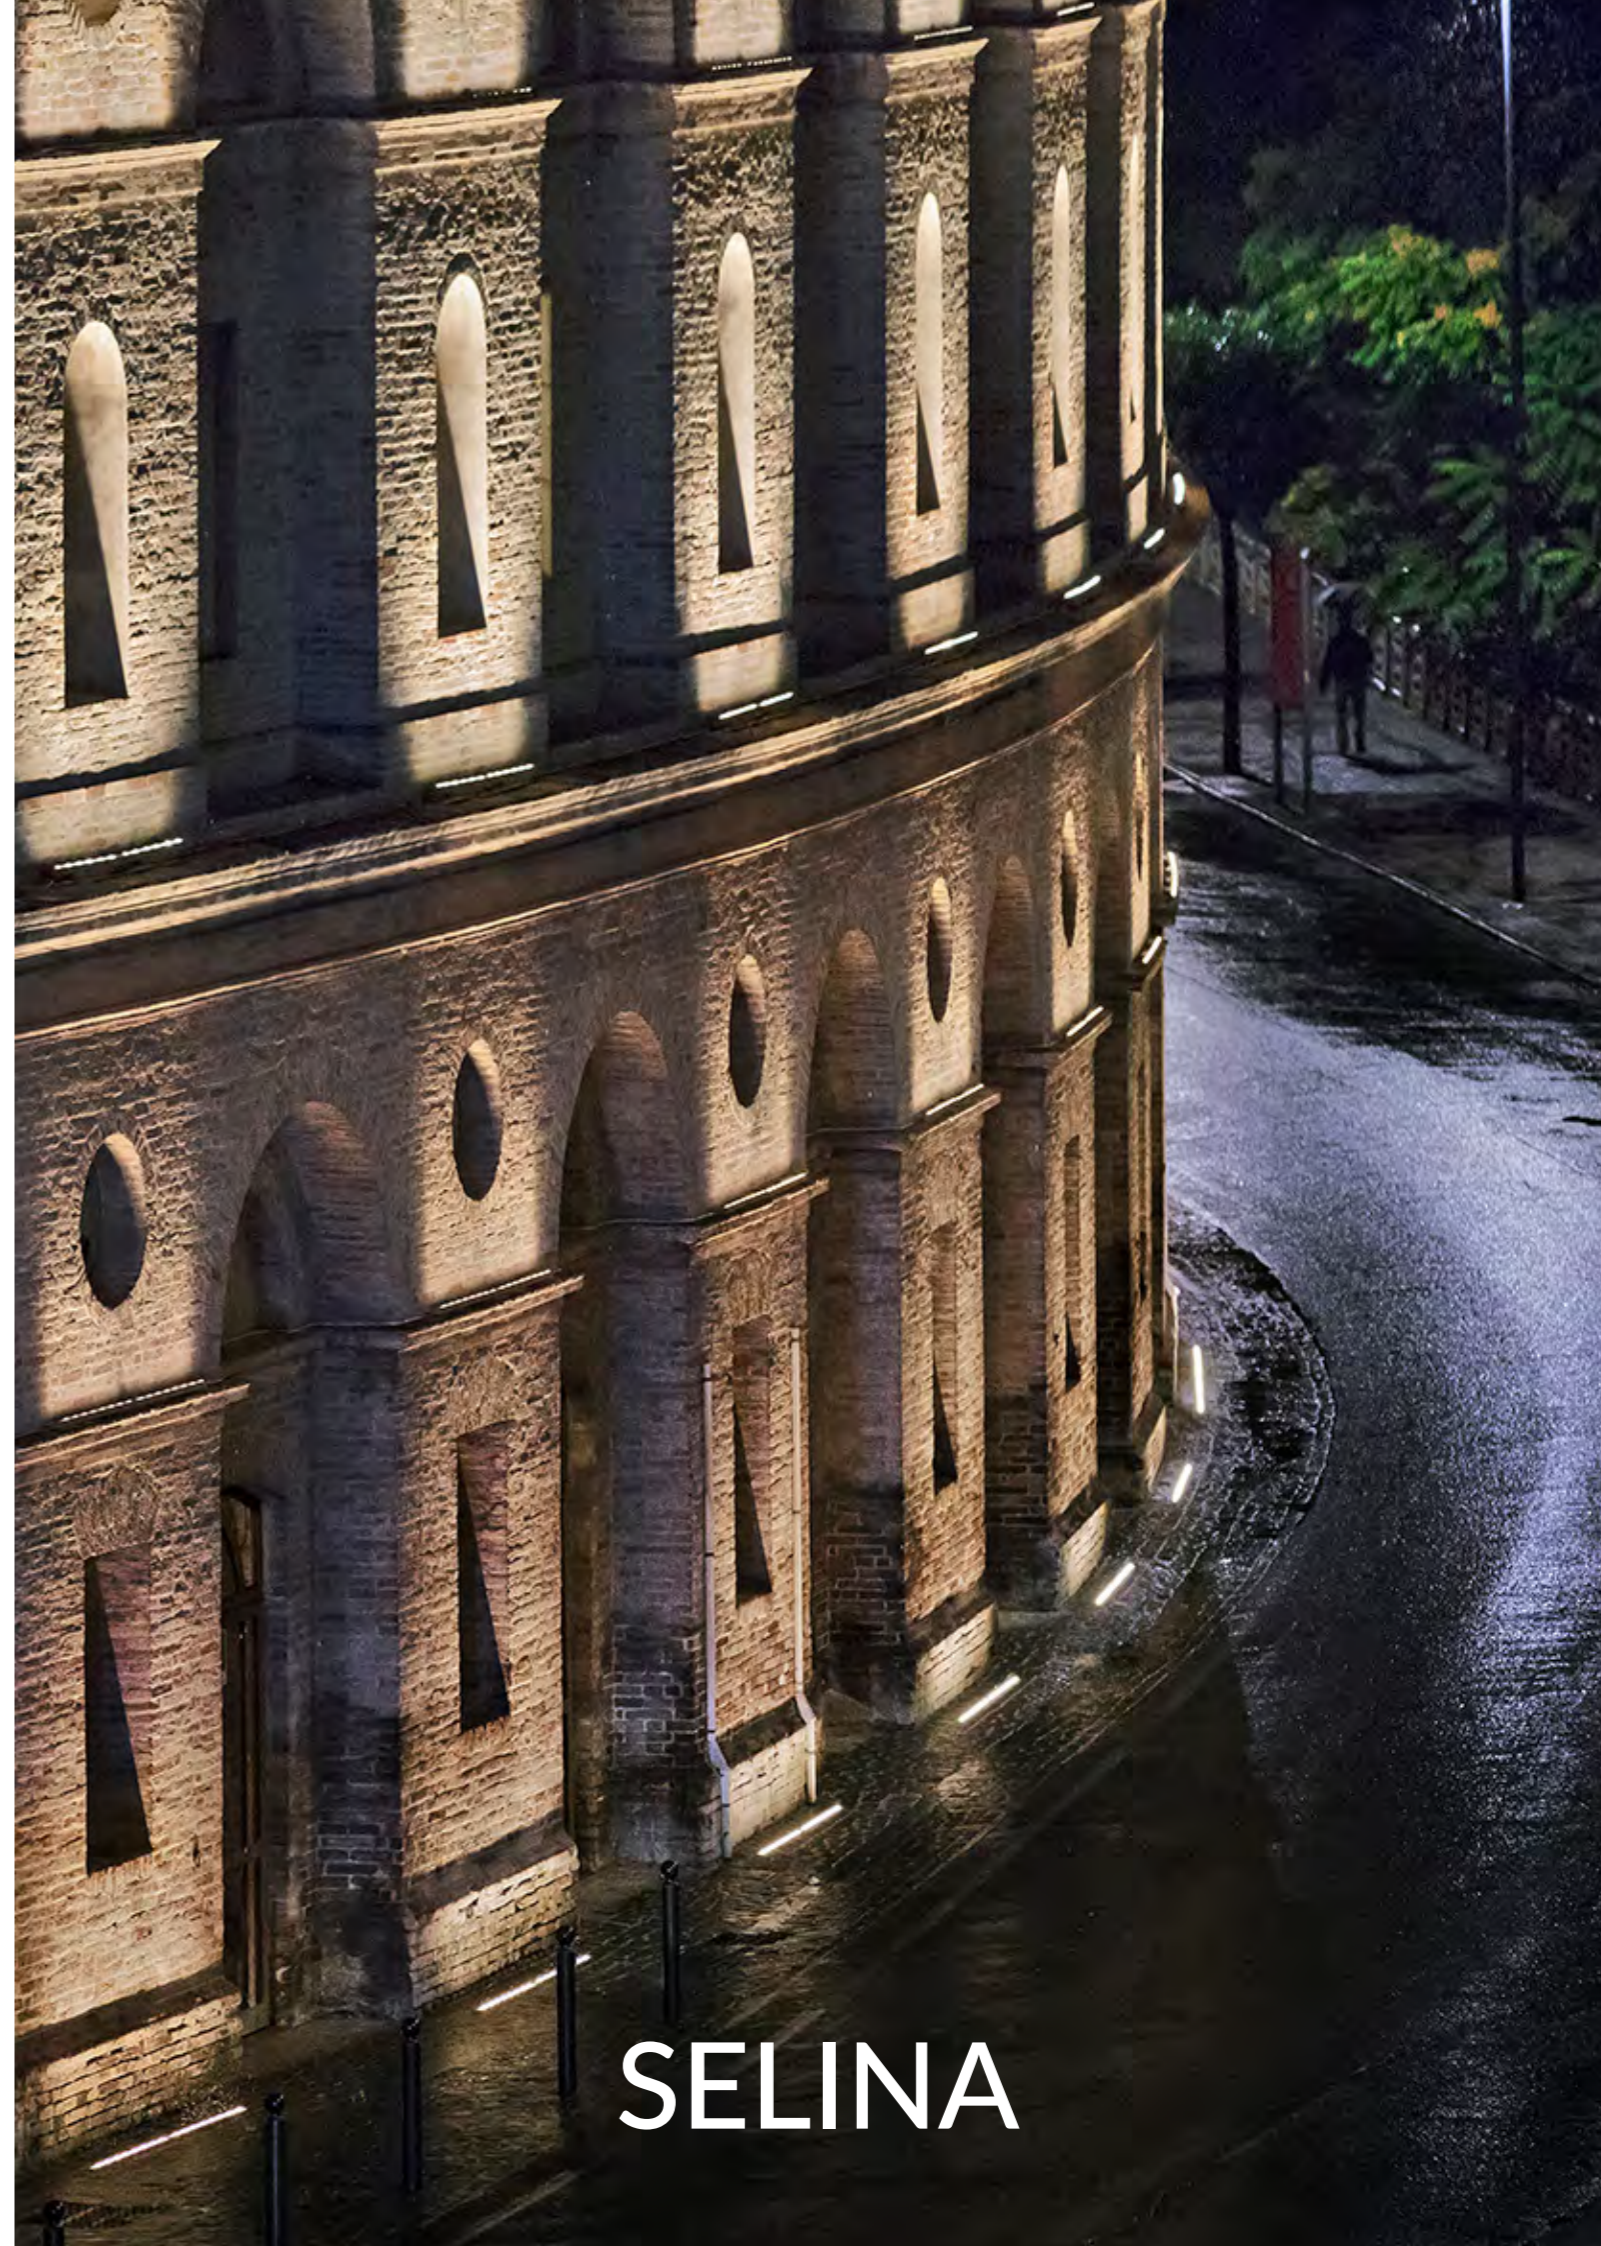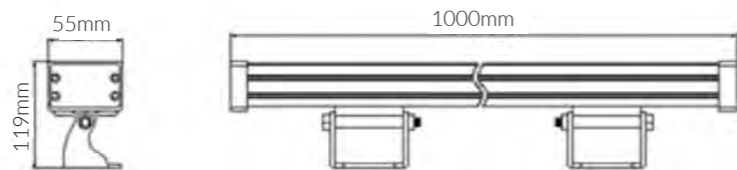

**SELINA**



**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminum  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 24W  
 CCT: 4000K-6000K, RGB  
 Beam Angle: 10°/15°/45°/60°/20°/45°/10x60°  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / DMX512

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Minas</b>	19862	18W	3000K	1,620lm	-	30°	L: 510	-
	19861	36W	3000K	3,240lm	-	30°	L: 1000	-

AC220-240V IP66  CRI>80

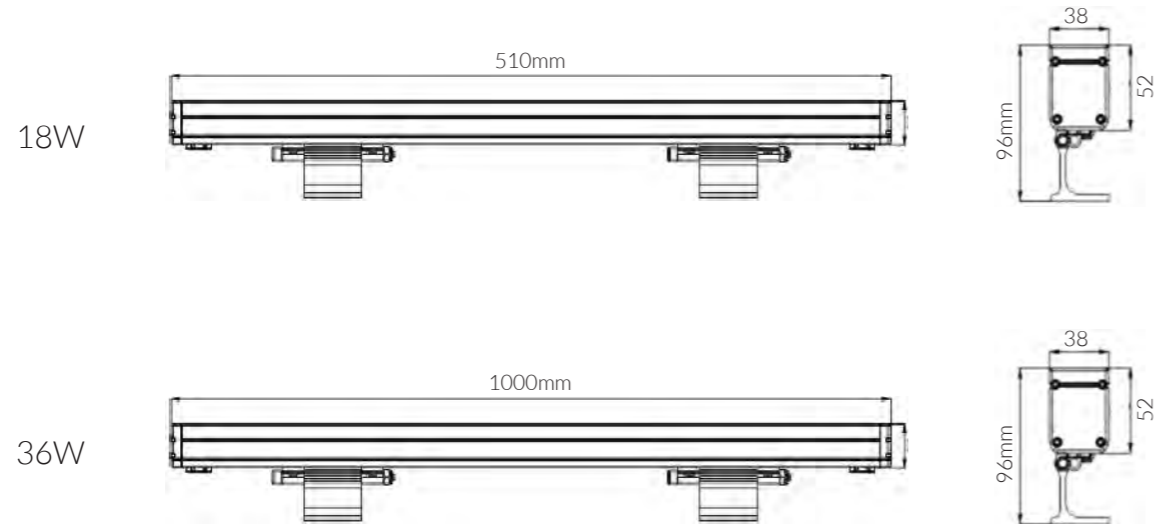

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium  
 Finish: White  
 Lifespan: 50,000 Hrs  
 Warranty: 3 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

Wattage: 18W/36W/48W  
 CCT: 4000K-6000K, RGB  
 Beam Angle: 10x60°/15x45°  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Agora</b>	19250	15W	3000K	1,350lm	-	15x18°	L:256	-
	19249	30W	3000K	2,700lm	-	15x18°	L:504	-
	19248	60W	3000K	5,400lm	-	15x18°	L:1000	-
	19233	72W	3000K	6,480lm	-	15x18°	L:1000	-

AC220-240V IP67  CRI>80



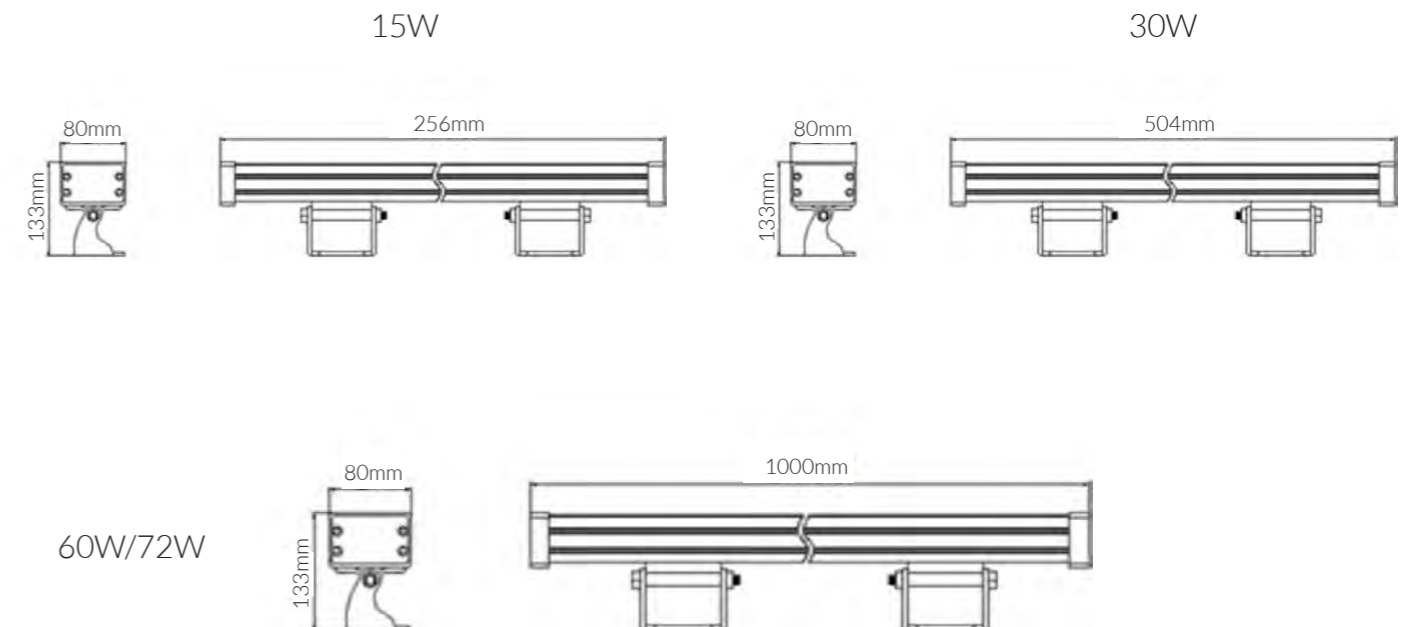

**Product Specifications:**

Lamp Type: LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Silicone Body + PMMA Lens  
 Finish: White  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

CCT: 4000K-6000K, RGB  
 Beam Angle: 10°/15°/25°/30°/40°/50°/25x50°  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / DMX512

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Elisa	18903	25W/Mtr	3000K	2,500lm	1040mA	45x30°	L: 1000	-
	18904	25W/Mtr	4000K	2,625lm	1040mA	45x30°	L: 1000	-

DC 24V IP 67  CRI>80

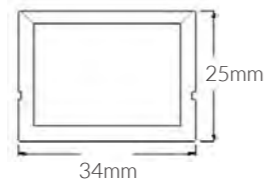

L: 1000mm (customisable)



**ELISA**  
 Dual-bend flexible strip

# JUNO

## Wall washer strip



SYV | Outdoor Wall Washer

### Product Specifications:

Lamp Type: PHILIPS LED  
 Operating Temp.: -25°C ~ +55°C  
 Humidity: 0-95% non condensing  
 Material: PU + PMMA Lens  
 Finish: White  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




### Product Options:

Wattage: 70W/140W  
 CCT: 3000K-6500K  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Juno</b>	19422	12W/mtr	4000K	1440lm	-	30°	L:1000 12x8mm	-

DC 24V IP 67 CRI>80

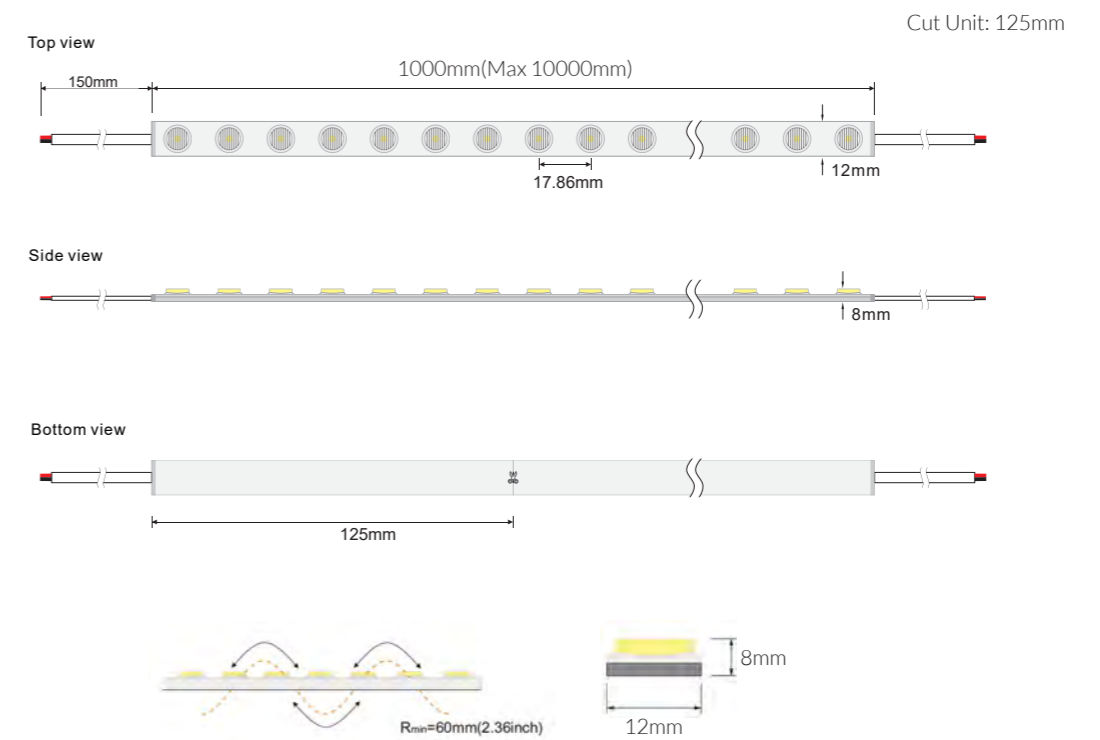

**Product Specifications:**

Lamp Type: CREE LED  
 LED Qty: 6 LEDs/set (max 24Leds)  
 Operating Temp.: -40°C ~ +55°C  
 Material: PC Body  
 Finish: Black  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Commercial, Retail, Residential, Hospitality




**Product Options:**

CCT: 4000K-6000K,  
 Beam Angle: 30°/45°  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / DMX512

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Gina</b>	19333	1W/Pc	3000K	2,500lm	1040mA	15°	Customisable Length upto 1 Mtr	-

DC 24V IP 68 CRI>80


SDCM<3 Class III IK03 CE

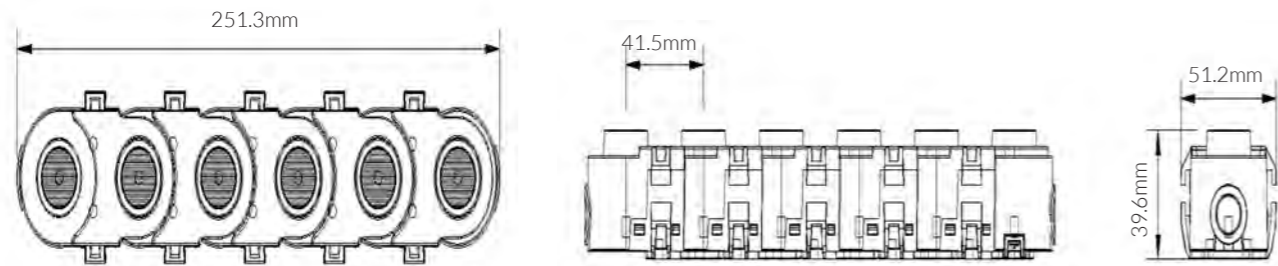


Customisable Length upto 1 Mtr (24 Leds/set)

# GINA

Flexible Chain Light

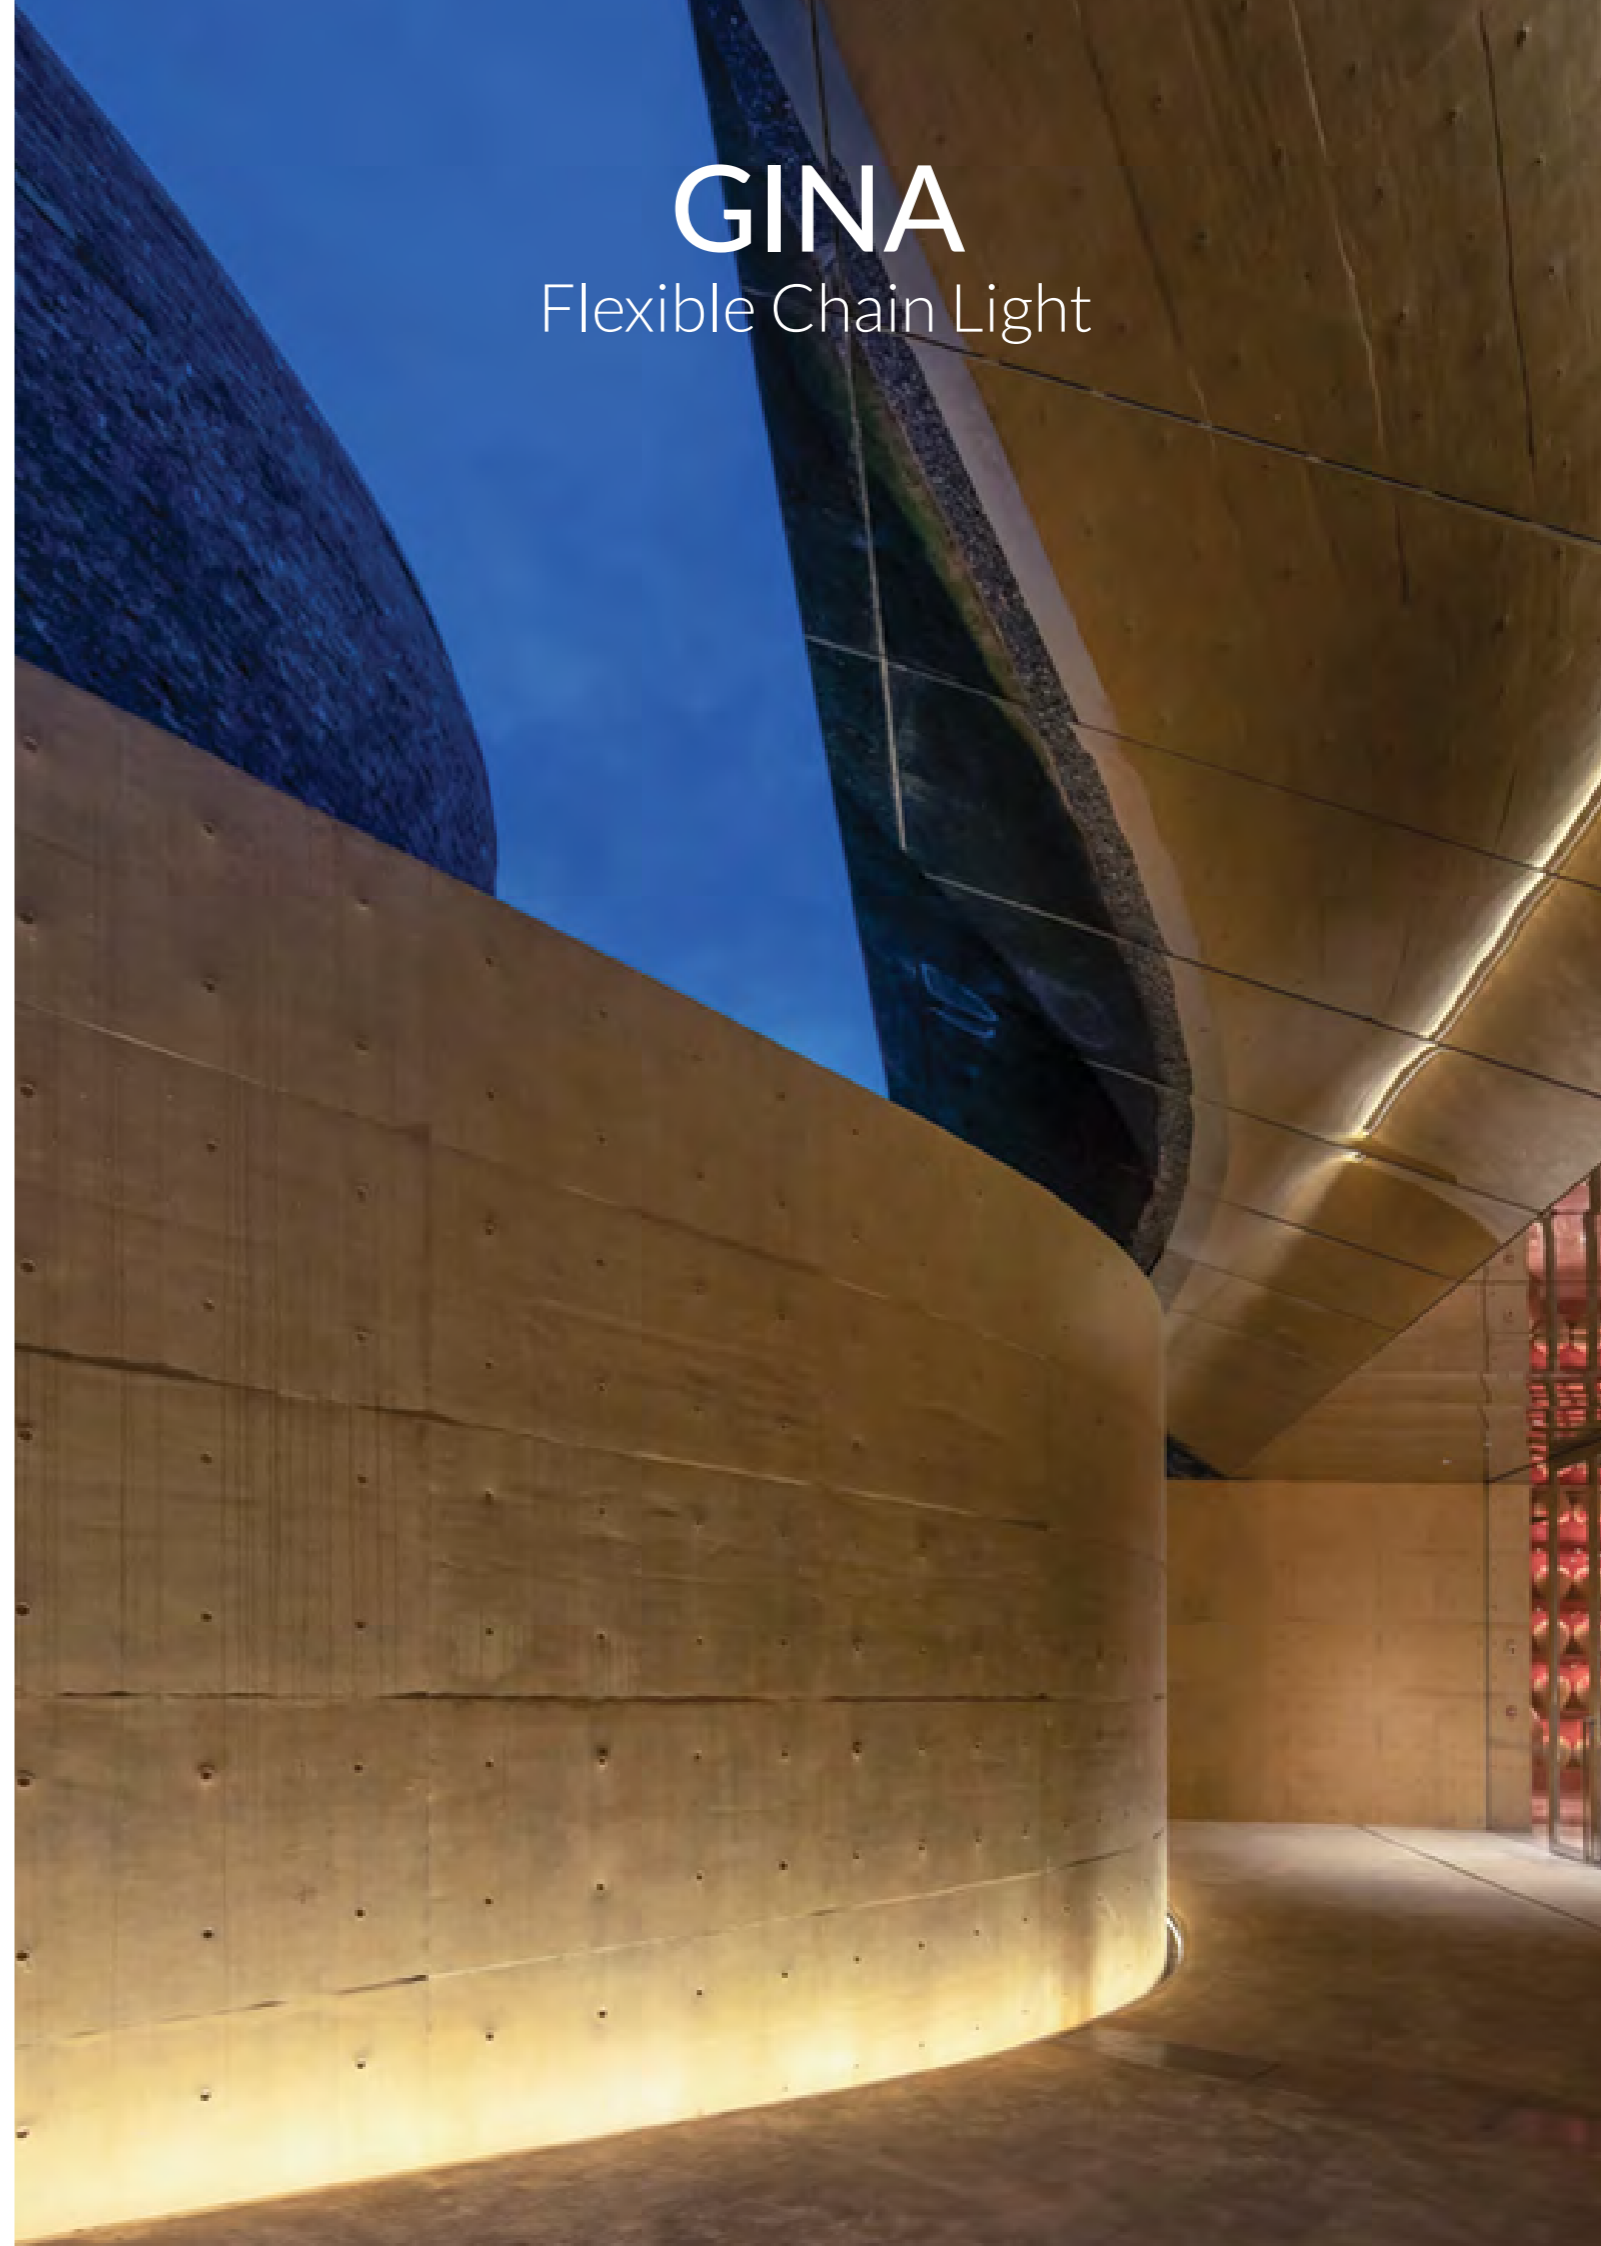

# FLOOD LIGHTS

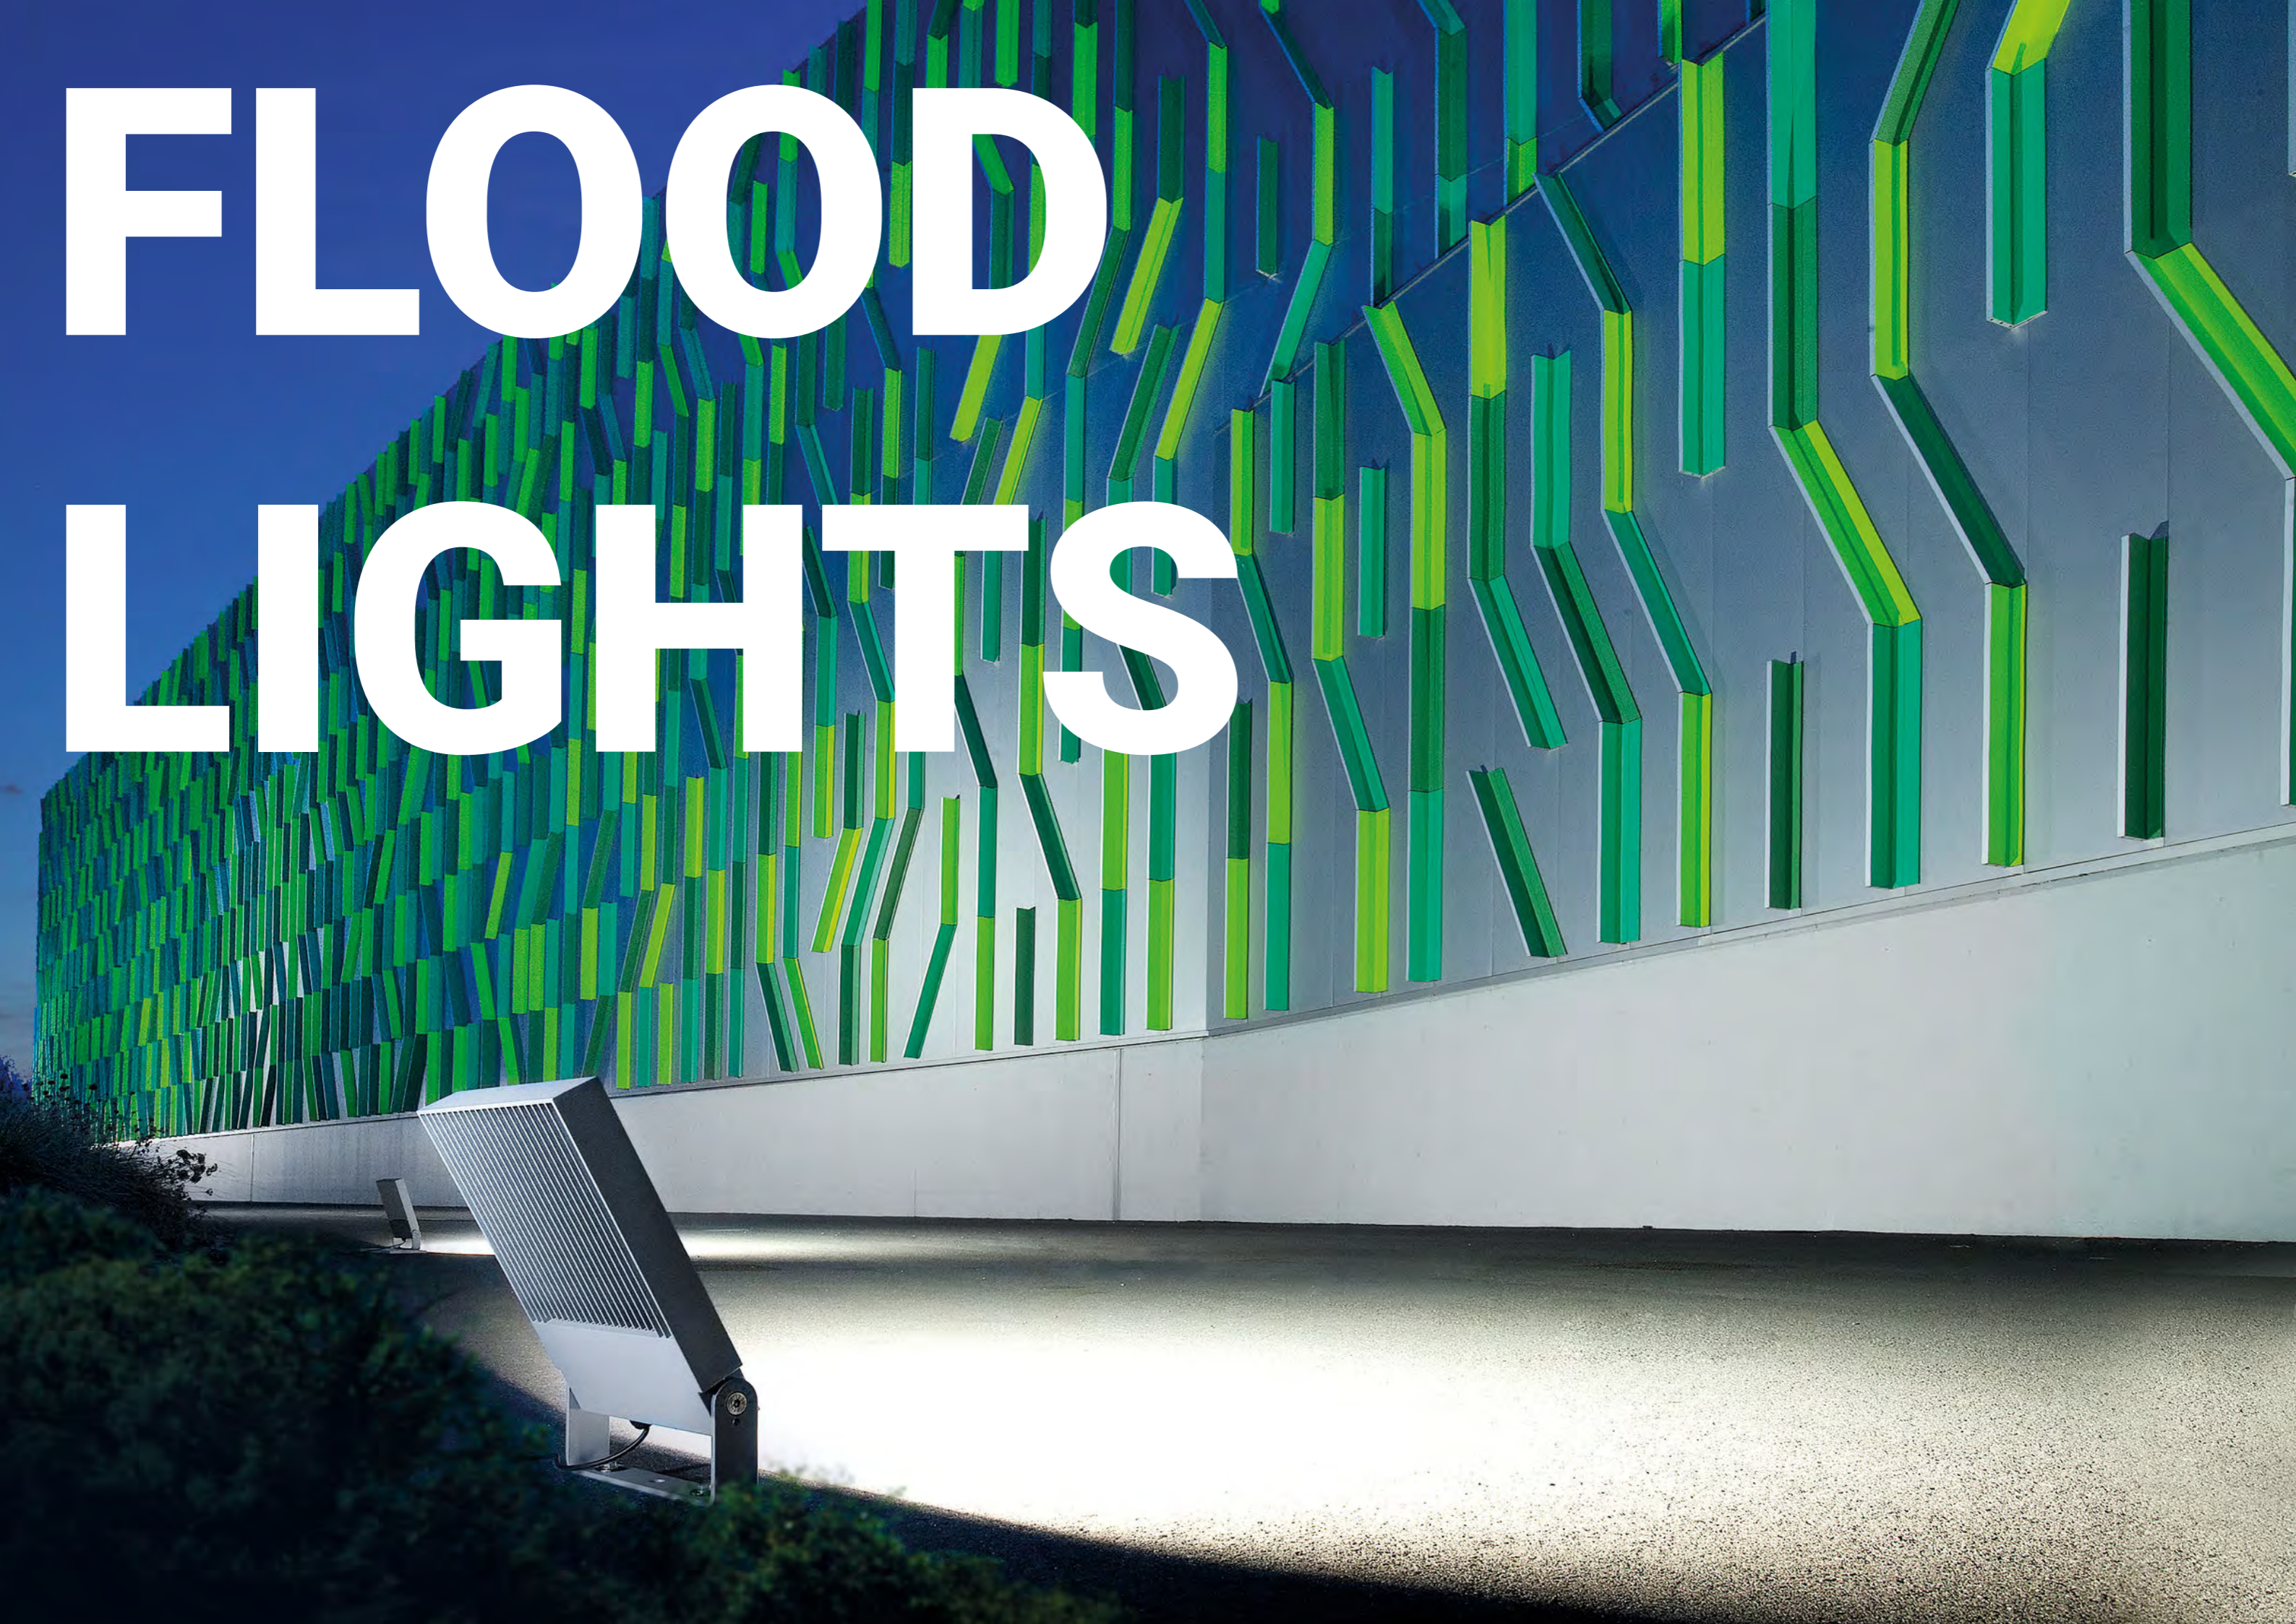



# EWO

CCT & Wattage Changeable

SYV | Outdoor Flood Light

**Product Specifications:**

Lamp Type: LUMI LED's  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium body  
 Lens: Tempered & Frosted glass  
 Finish: Matte Black  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



SKU 18450/18451



SKU 18408/18409

**Product Options:**


Control: Switchable / TRIAC / 0-10V / 1-10V / DALI  
 Optional: PIR Sensor

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Ewo (CCT &amp; Wattage Changeable)</b>	18408	80W/100W/ 150W	3000K/4000K/ 5000K	140lm/W	-	120°	338.5x80x323	-
	18409	150W/180W/ 200W	3000K/4000K/ 5000K	140lm/W	-	120°	338.5x80x323	-
	18450	50W	3000K	6,500lm	-	120°	228x60x203	-
	18451	50W	6000K	7,000lm	-	120°	228x60x203	-


AC220-240V IP66 120° CRI>70 PF>0.9



SKU 18408/18409

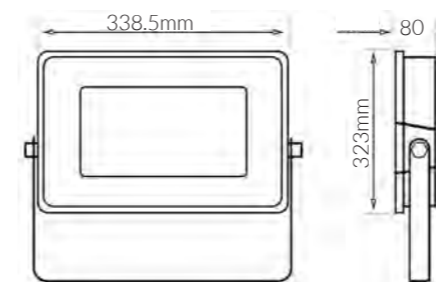

SKU 18450/18451

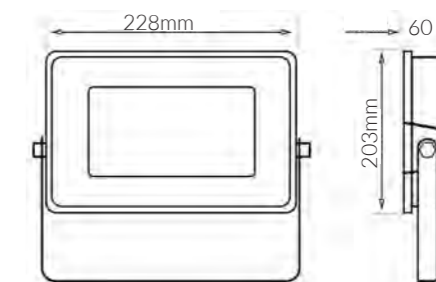

PRODUCT FEATURES & BENEFITS



Multi-CCT & Multi-Wattage Switchable  
80W-100W-150W  
3000K-4000K-5000K



Slim & Sturdy One-piece  
Die Cast Aluminum Housing




Integrated Visor Reduces  
Observable Glare



High Efficacy Up to 160LPW



High-reflectance white reflector  
maximizes output

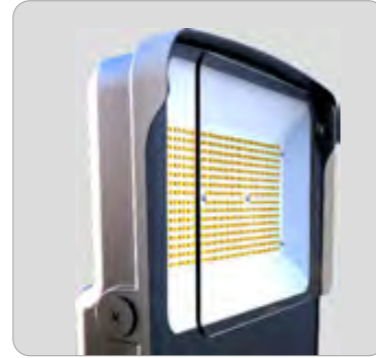

Tempered glass lens won't yellow



Photocell





**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium body  
 Lens: Tempered glass  
 Finish: Black powder Coated  
 Lifespan: 100,000 Hrs  
 Warranty: 6 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting




**Product Options:**

Wattage: 400W / 1000W / 1250W  
 CCT: 3000K - 6000K  
 Beam Angle: 20°x20° / 30°x30° / 45°x45° / 60°x60° / 75°x75°  
 Control: Switchable / 1-10V / DALI  
 Control: Occupancy Sensor

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Lunio</b>	15757	600W	3000K	87,000lm	12400mA	8°x8°	533x230x518	-
	16018	800W	3000K	120,000lm	16800mA	10°x10°	533x230x518	-

AC220-240V IP66 8x8° 10x10° CRI>70 PF>0.9

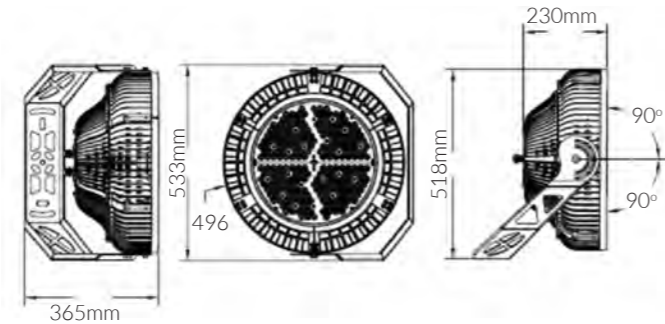

**Product Specifications:**

Lamp Type: PHILIPS LUMI LED's  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium body  
 Finish: Black  
 Lifespan: 100,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting





**Product Options:**

Wattage: 300W / 500W / 750W / 1000W  
 CCT: 3000K - 6000K  
 Beam Angle: 30° / 60° / 90°  
 Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Cedro</b>	17116	400W	4000K	74,800lm	-	15°	420x448.7	-

AC220-240V IP66 15° CRI>70 PF>0.9 3.75KV

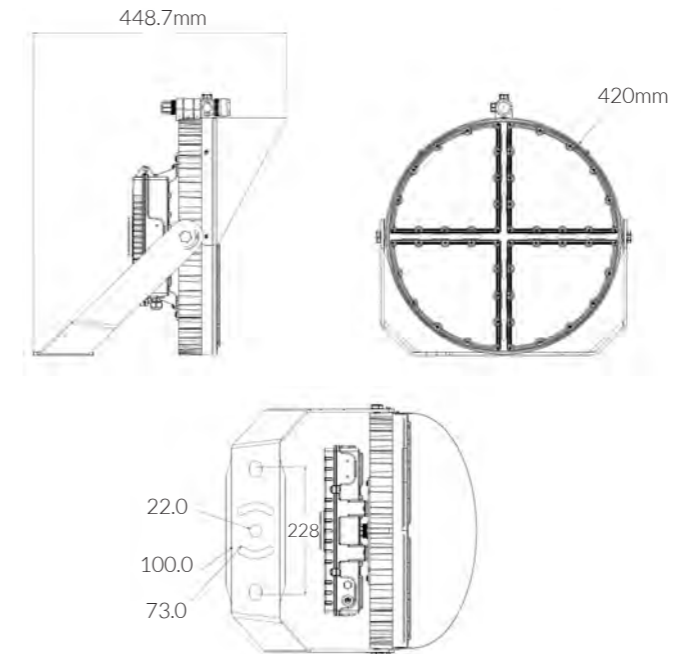

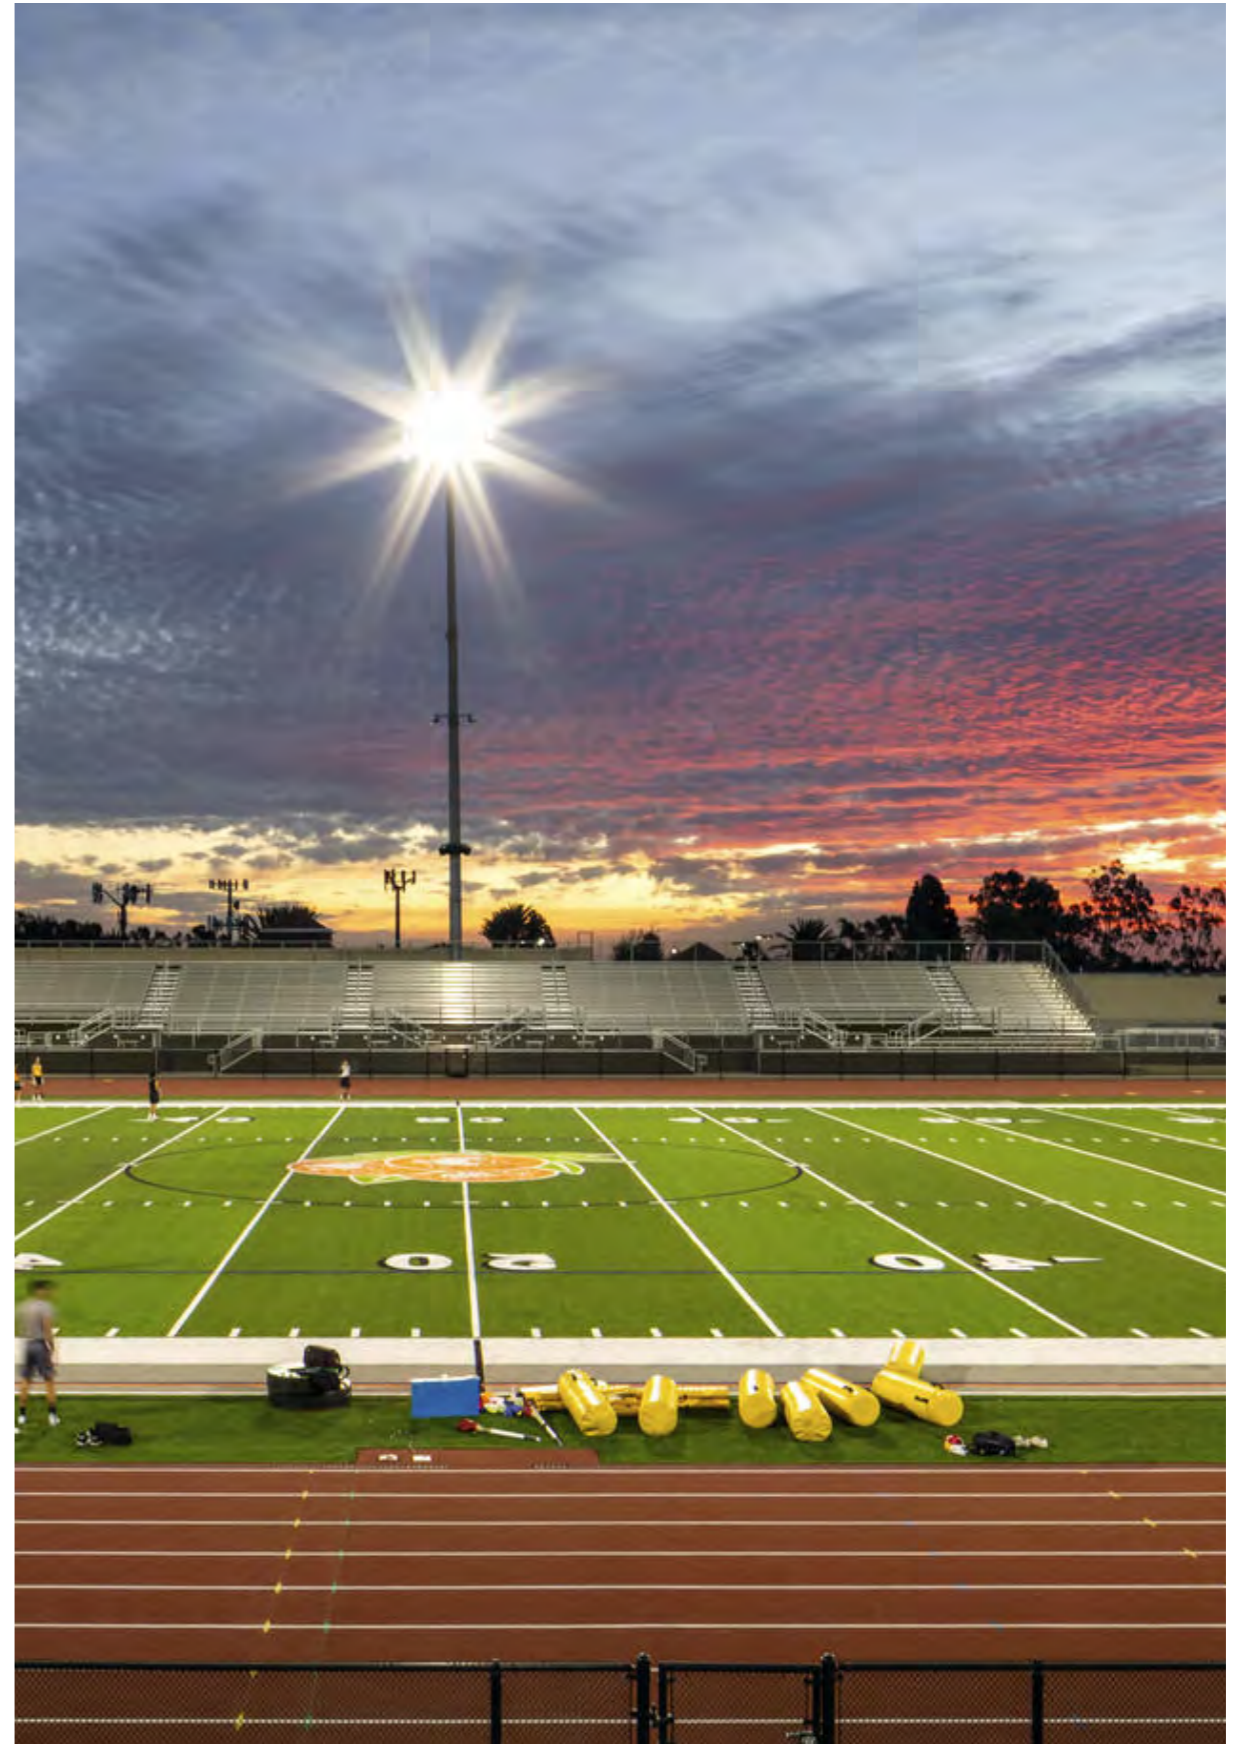



**Product Specifications:**

Lamp Type: LUMI LED's  
 Driver: Meanwell Driver  
 Operating Temp.: -20°C ~ +50°C  
 Alignment: 0° ~ 270°  
 Material: Die cast aluminium body,Zinc Galvanised Steel  
 Optical Cover: Polycarbonate  
 Finish: Black  
 Lifespan: 100,000 Hrs  
 Warranty: 6 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



**Product Options:**

Wattage: 50W/75W/300W/400W/800W  
 CCT: 3000K - 6000K  
 Beam Angle: 30x30°/60x60°/90x90°/Type I (30x100°)  
 Control: Switchable / 1-10V / DALI / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Pandora</b>	15592	35W	5000K	4,550lm	72mA	90x90°	326x113x128	-
	15294	100W	5700K	17,500lm	2100mA	60x60°	326x113x128	-
	15593	100W	5000K	14,200lm	2100mA	90x90°	332x113x249	-
	15594	150W	5000K	19,500lm	3100mA	90x90°	332x113x249	-
	15372	200W	5700K	35,800lm	4200mA	60x60°	381x113x249	-
	15595	200W	5000K	26,800lm	900mA	90x90°	332x113x356	-

AC220-240V IP65 60x60°/90x90° CRI>70 PF>0.9



**Product Specifications:**

Lamp Type: PHILIPS LUMI LED's  
 Driver: MeanWell  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium body+Zinc Galvanised Steel Bracket  
 Finish: Black  
 Lifespan: 30,000 Hrs  
 Warranty: 3 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



**Product Options:**


Wattage: 50W/75W/100W/150W/300W/400W/500W  
 CCT: 3000K - 6000K  
 Beam Angle: 60x60° / 100x100° / 140x140°  
 Control: Switchable / 1-10V / DALI  
 Control: Occupancy Sensor

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Spartan</b>	15646	200W	5000K	26,000lm	3125mA	60x60°	310x124x239	-
	15709	600W	5000K	78,000lm	12500mA	60x60°	582x124x359	-
	15726	1000W	5000K	120,000lm	16800mA	30°x30°	681x113x463	-


AC220-240V IP65 30x30°/60x60° CRI>80 PF>0.9




SKU 15592/15294

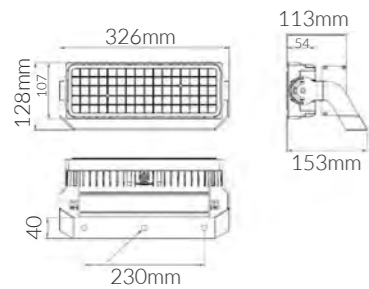


SKU 15593/15594/15372

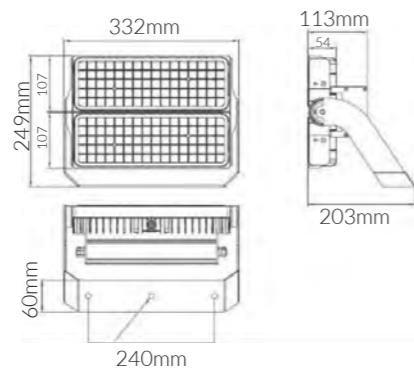


SKU 15595

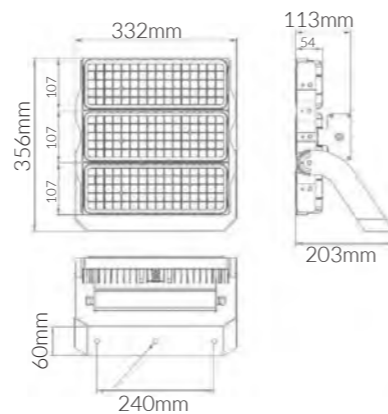


200W

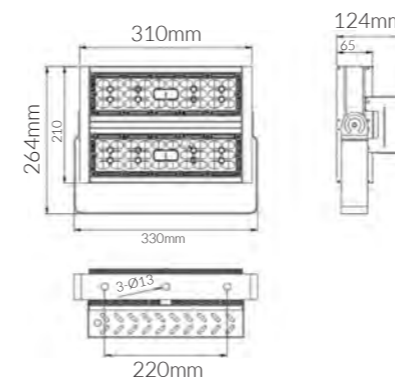

600W

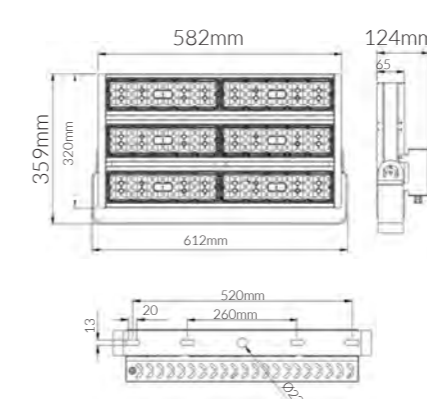

1000W

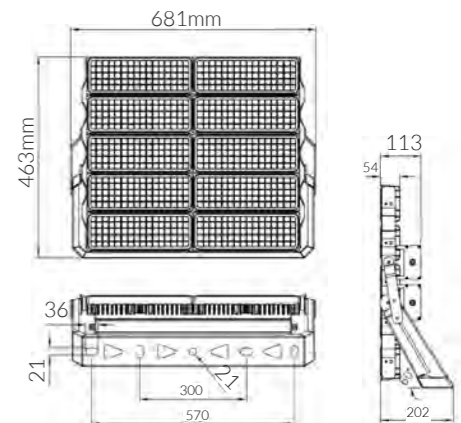

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium body  
 Lens: All-in-one optical lens, efficiency ≥85%  
 Lens Window: Tempered glass. T=4mm  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



**Product Options:**





CCT: 3000K - 6000K  
 Beam Angle: 9°/ 15°/20°/45°/60°  
 Finish: Silver Grey / Black  
 Control: Switchable / 1-10V / DALI / TRIAC / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Nexo</b>	17746	12W	3000K	1,080lm	97mA	30°	Ø130x184	-

AC220-240V IP65  CRI>80 PF>0.9



**Optional Accessory: Spike**

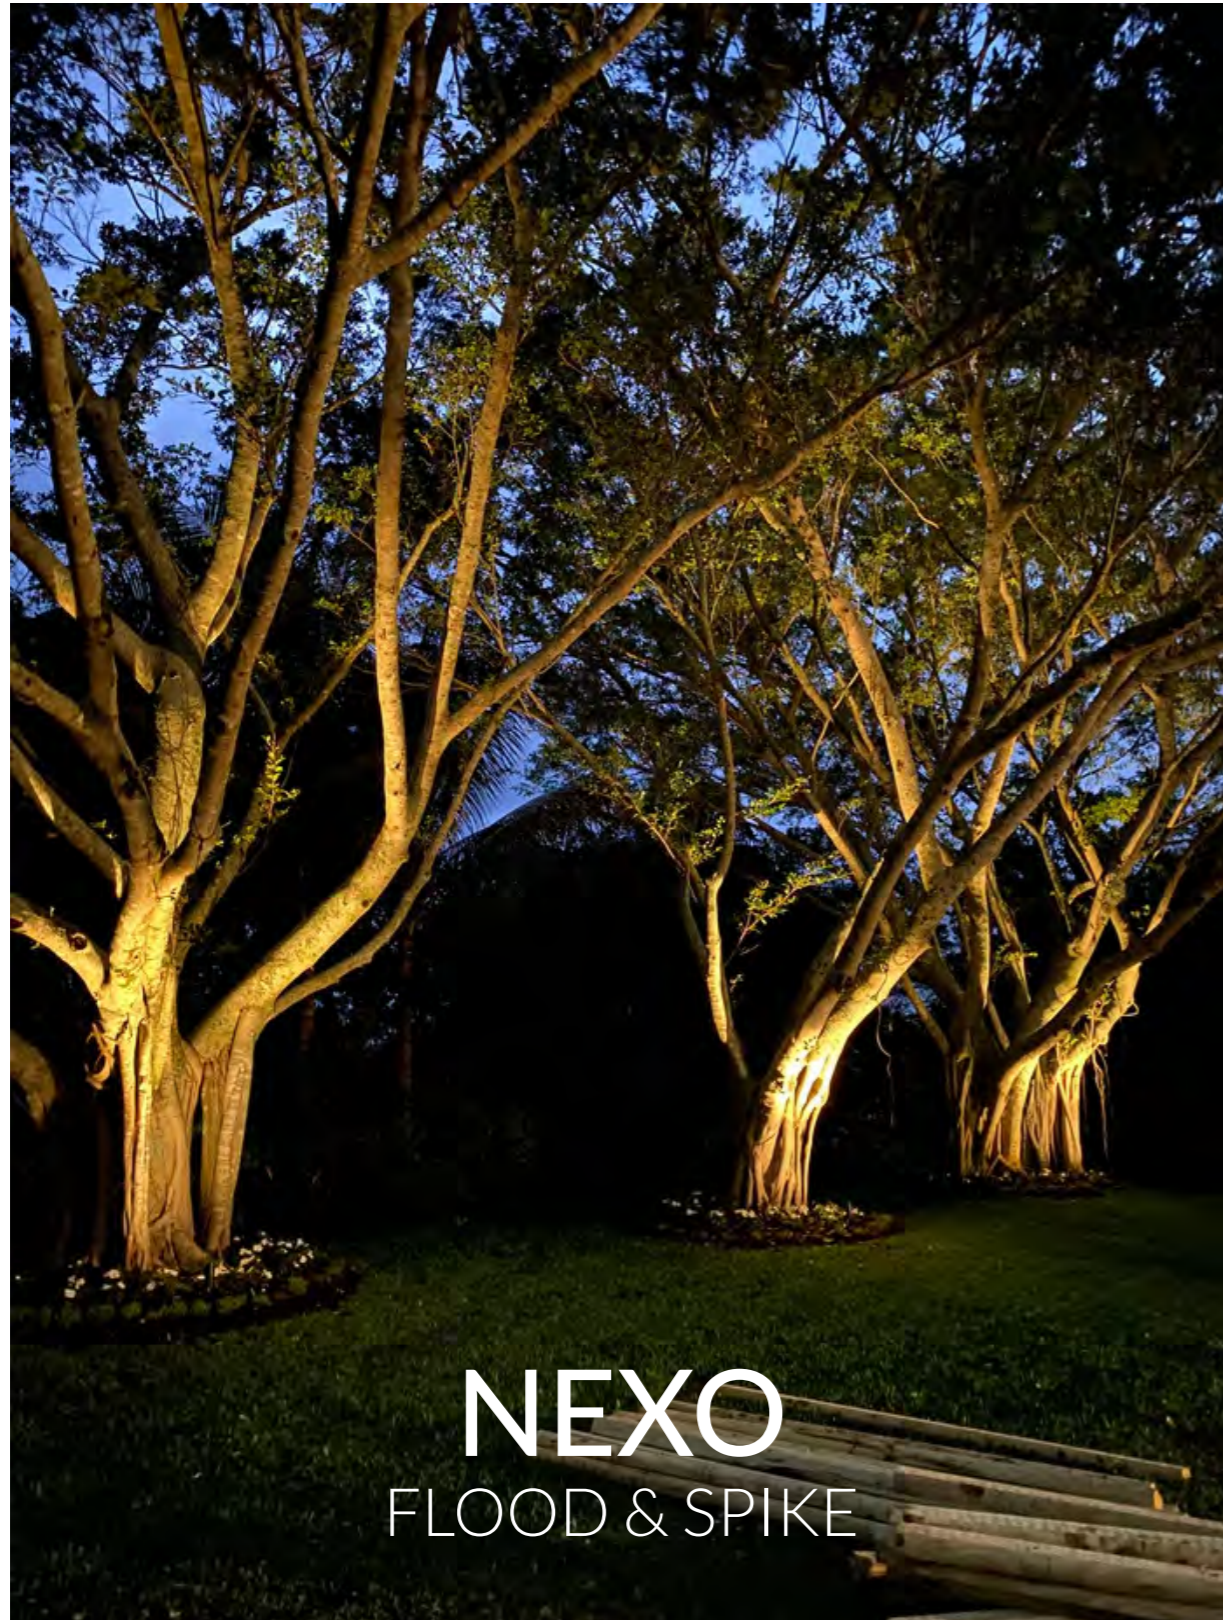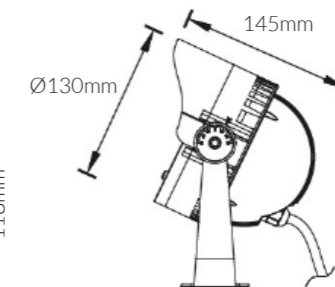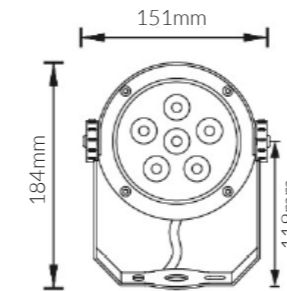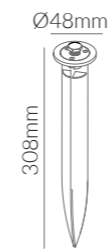

**Product Specifications:**

Lamp Type: PHILIPS LUXEON LED  
 Driver: PHILIPS  
 Operating Temp.: -40°C ~ +50°C  
 Material: Die cast aluminium body  
 Finish: Black  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting




**Product Options:**

Wattage: 240W / 360W / 480W / 720W  
 CCT: 3000K - 6000K  
 Beam Angle: 45x45° / 90x90°  
 Control: Switchable / 1-10V / DALI / TRIAC / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Enyo</b>	17221	500W	5000K	62,500lm	670mA	60x60°	595x125x787	-


AC220-240V IP 65  CRI>70 PF>0.9

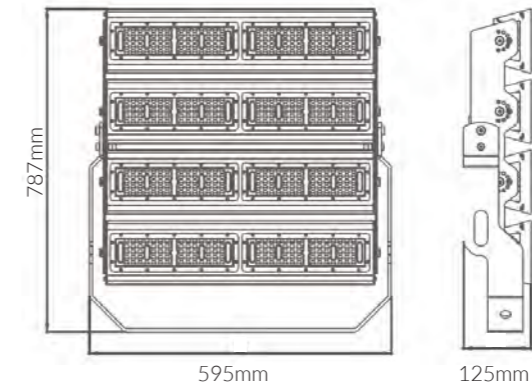

**Product Specifications:**

Lamp Type: CREE LED  
 Driver: MeanWell  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die cast aluminium body+Tempered Glass  
 Finish: Dark Grey  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting

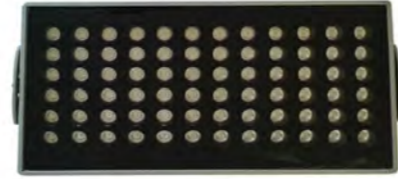


**Product Options:**

CCT: 3000K - 6000K  
 Control: Switchable / 1-10V / DALI / TRIAC / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Piatto</b>	16764	150W	BLUE	13,500lm	600mA	90°	595x125x787	-

AC220-240V IP65  CRI>80 PF>0.8



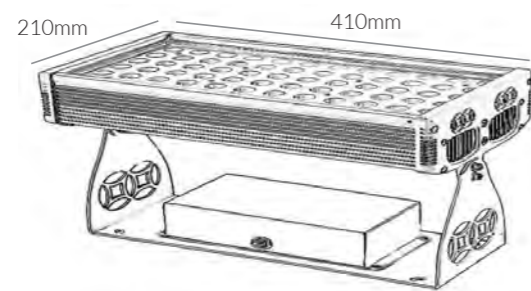

**AREA &**

**POST TOP**





INVITAR

SYV | Outdoor Area & Post-Top

**Product Specifications:**

Lamp Type: BRIDGELUX LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-cast Aluminum  
 Gasket: Made of Thermostable silica gel to improve protection class  
 Fastener: Made of stainless steel with high intensity and corrosion protection  
 Diffuser: Clear Glass  
 Finish: Dark Grey UV-proof powder coating  
 Lifespan: 50,000 Hours  
 Warranty: 5 Years  
 Applications: Outdoor, Gardens, Pathways, etc.

**Product Options:**

CCT: 3000K - 6000K  
 Control: Switchable / DALI / 1-10V / TRIAC / 0-10V



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Invitar</b>	15237	30W	3000K	3,300lm	700mA	-	150x2500	-

AC220-240V IP 65  CRI>80 PF>0.9



**Product Specifications:**

Lamp Type: E40  
 Operating Temp.: -20°C ~ +50°C  
 Head Material: Extruded Aluminium  
 Diffuser: Transparent Thermo-polymer stabilised  
 Finish: UV-proof powder coating in Black  
 Warranty: 10 Years  
 Applications: Outdoor, Gardens, Pathways, etc.




**Product Options:**

Lamp Type: E27

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Mecho</b>	16839	-	-	-	-	-	Ø700x710	-

AC90-260V IP65  CRI>70 PF>0.9

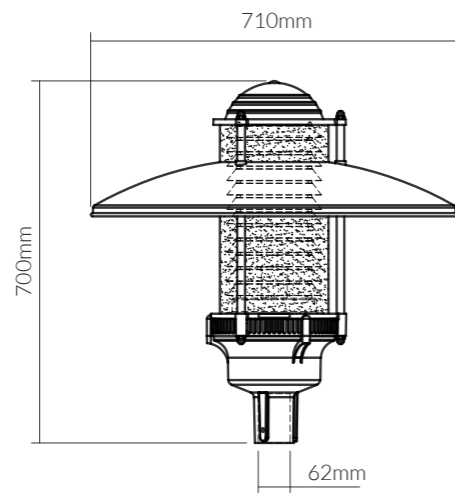

# MECHO

## E40 BASE



**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium Body + Hot-dip galvanized iron pole  
 Finish: Matt Black UV Proof powder coating  
 Warranty: 5 Years  
 Applications: Outdoor, Gardens, Pathways, etc.

**Product Options:**


CCT: 3000K - 6000K  
 Control: Switchable / 1-10V / DALI



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Alan</b>	19121	45W	3000K	4500lm	-	-	Ø250xH:6000	

AC90-260V IP65 CRI>70 PF>0.9

SDCM <3 Class I IK08 CE

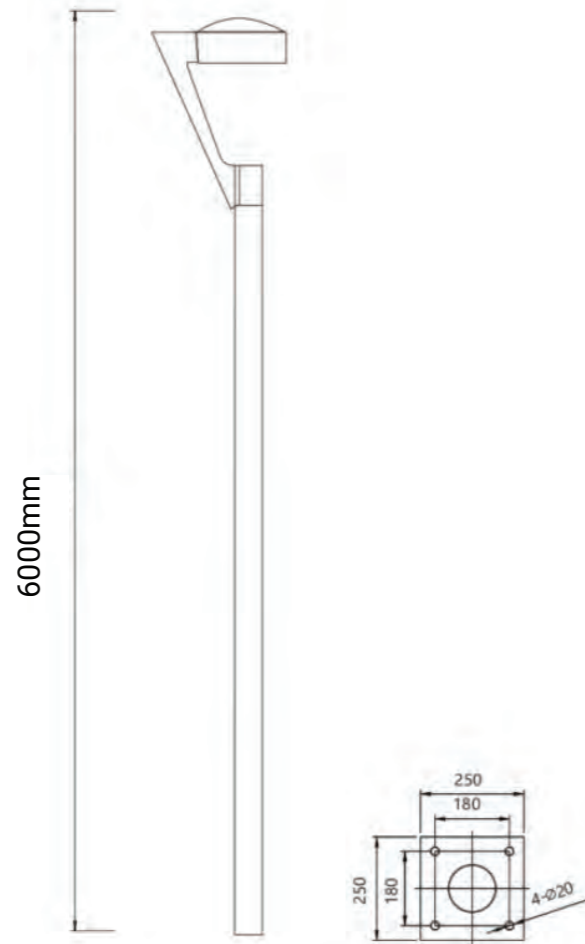

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium Body + Opal PC Difusser + Hot-dip galvanized iron pole  
 Finish: Matt Black UV Proof powder coating  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting

**Product Options:**


CCT: 3000K - 6000K  
 Finish: Dark Grey, Sand Silver, Gray Metal Sand Grain  
 Control: Switchable / 1-10V / DALI / 0-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Britto</b>	19003	50W	4000K	5000lm	-	-	Ø500xH:4500mm	

AC90-260V IP65 CRI>70 PF>0.9

SDCM <3 Class I IK08 CE

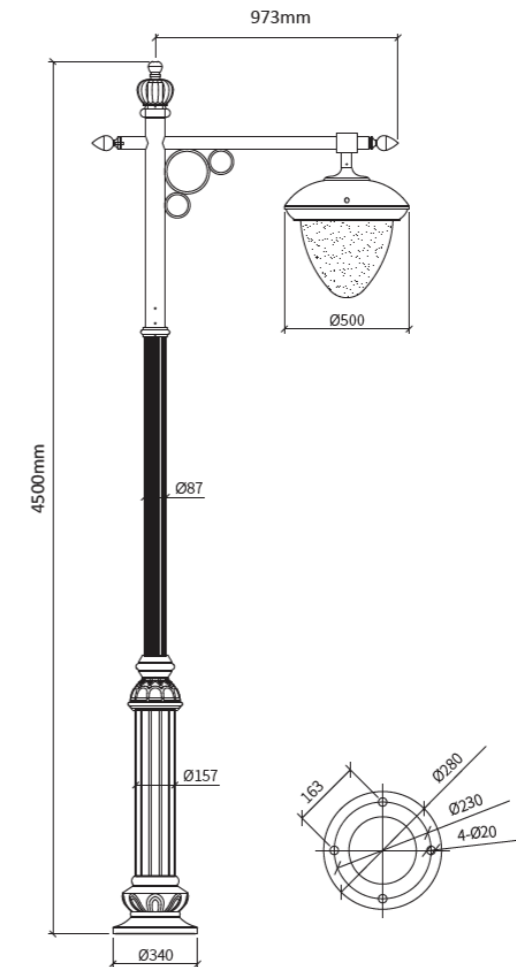

**Product Specifications:**

Lamp Type: OSRAM LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminium Body + Opal PC Difuser  
 + Hot-dip galvanized iron pole  
 Finish: Matt Black UV Proof powder coating  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting

**Product Options:**


Wattage: 7W, 10W, 12W, 15W, 20W, 30W  
 CCT: 4000K/6000K  
 Control: Switchable / 1-10V / DALI



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Lucio</b>	19154	35W	3000K	2,975lm	-	360°	Ø560x700	-

AC90-260V IP65  CRI>70 PF>0.9

 SDCM <3  Class I  IK08  CE

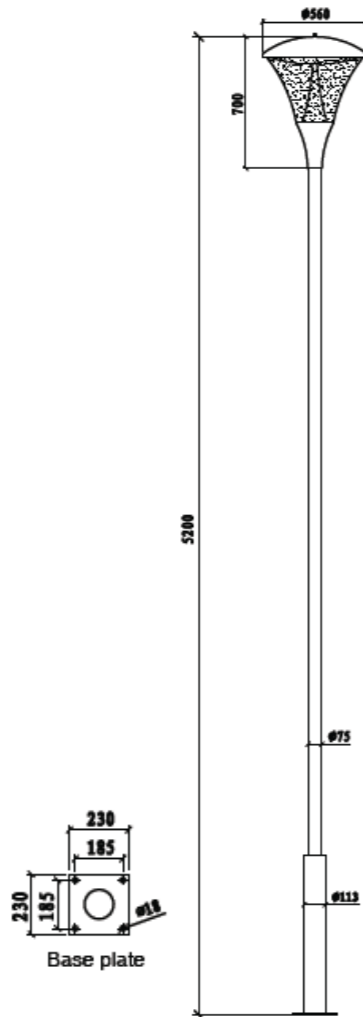



STREET

LIGHT

**Product Specifications:**


Lamp Type: EPISTAR LED  
 Operating Temp.: -20°C ~ +50°C  
 Material: Aluminum Body  
 Finish: Black  
 Power Distribution: 2.5KV  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Pools, Fountains












**Product Options:**

Wattage: 10W/20W/30W/50W  
 CCT: 3000K - 6000K  
 Beam Angle: 60°  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM  
 Accessory: Tripod Stand

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Liceo	16873	80W	5000K	9,600lm	350mA	150°	484x98x209	-
	15935	100W	3000K	12,500lm	350mA	150°	484x98x209	-
	15934	100W	4000K	10,500lm	350mA	140°	484x98x209	-
	15643	100W	6000K	10,000lm	350mA	140°	428x77x151	-
	15937	150W	4000K	15,750lm	350mA	140°	556x77x175	-

AC220-240V IP65  CRI>70 PF>0.9

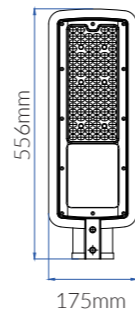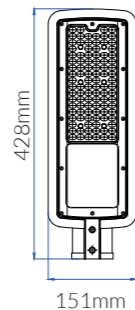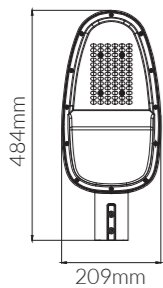

# LICEO



# JABO

## ECO-MIDI STREET LIGHT




### Characteristics


- Housing is made of very anti corrosion resistant high pressure die-cast aluminium with polyester powder coated treatment.
- (NTC) Thermal management protect for LED module.
- Toughened glass with high light transmittance to optimize the light output ratio.
- Stainless steel bracket to secure the covering open position for maintenance.
- Integrated Surge protector (SPD) 10kV-10kA, type I / II, with LED signal and thermal fuse



Horizontal Installation

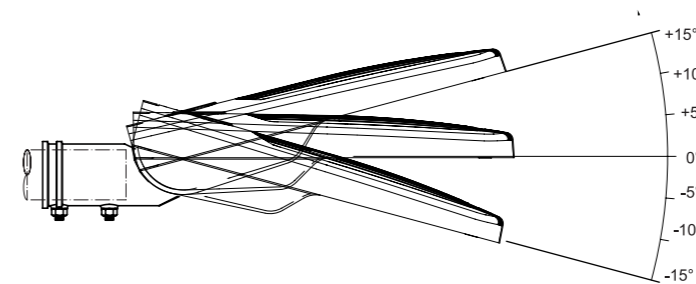

Post Top Installation

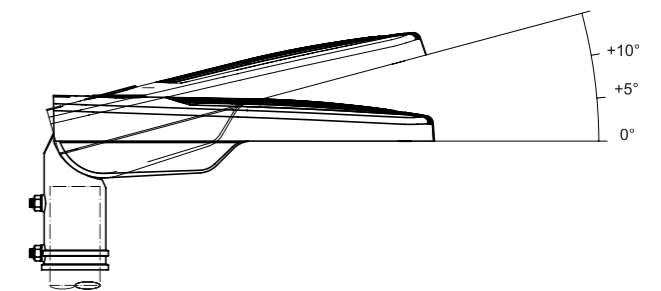

**Product Specifications:**

Lamp Type: CREELED  
 Driver: PHILIPS Driver  
 Installation Height: 6-14 M  
 Operating Temp.: -20°C ~ +50°C  
 Material: Die-cast aluminium+tempered glass  
 Finish: Dark Grey  
 Power Distribution: 2.5KV  
 Lifespan: 50,000 Hrs  
 Warranty: 5 Years  
 Applications: Pools, Fountains





**Product Options:**

Wattage: 51W to 137W  
 CCT: 3000K - 6000K  
 Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM  
 Mounting: Bracket or Post-top Ø60mm, Ø48mm (OPTIONAL), Ø76mm (OPTIONAL)

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
<b>Jabo</b>	16723	103W	4000K	12,875lm	700mA	-	702x314x130	-
	16724	135W	4000K	16,875lm	700mA	-	702x314x130	-

AC220-240V IP 66  CRI>70 PF>0.9

 SDCM <3  Class I  IK09  CE

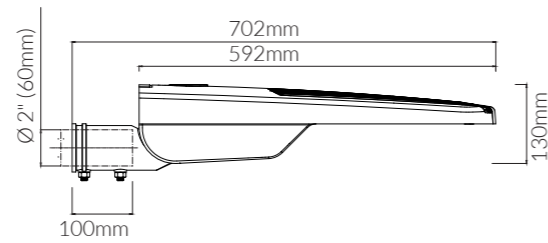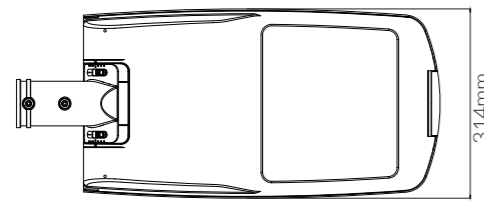





Lighting designed to elevate the way you  
relax, entertain, and explore outdoors.

SYV ILUMINACIÓN EUROPEA S.L

