

Outdoor Collection

Outdoor lighting designed to enhance
how you relax and entertain.

SYV ILUMINACIÓN EUROPEA S.L




design to match function

Our products are designed in line with our innovative technology. State of the art architecture requires luminaires that enhance the space from both a technical and design perspective.

Our products are manufactured in Hongkong and are checked repeatedly, from the receipt of raw materials through to the processing, assembly and prototype stages. Our goal is to supply you with the very best lighting equipment offering the latest in technological developments.

Our range of indoor luminaires embraces a wide spectrum of different lighting tools: spotlights and downlights, track and light structures, ceiling lights, recessed lights and linear lights. They all share a common guiding design principle of efficient visual comfort.

Our understanding of light extends across residential, offices, hospitality, education, retail and public spaces. We are a trusted supplier to our renowned customers like EMAAR, ETISALAT, ADIB, Sharjah Municipality and many more. We begin with planning aspect of a project to supply and installation. Our team works with many different stakeholders to exceed design and performance expectations. We work in collaboration with you to be a trusted lighting partner.

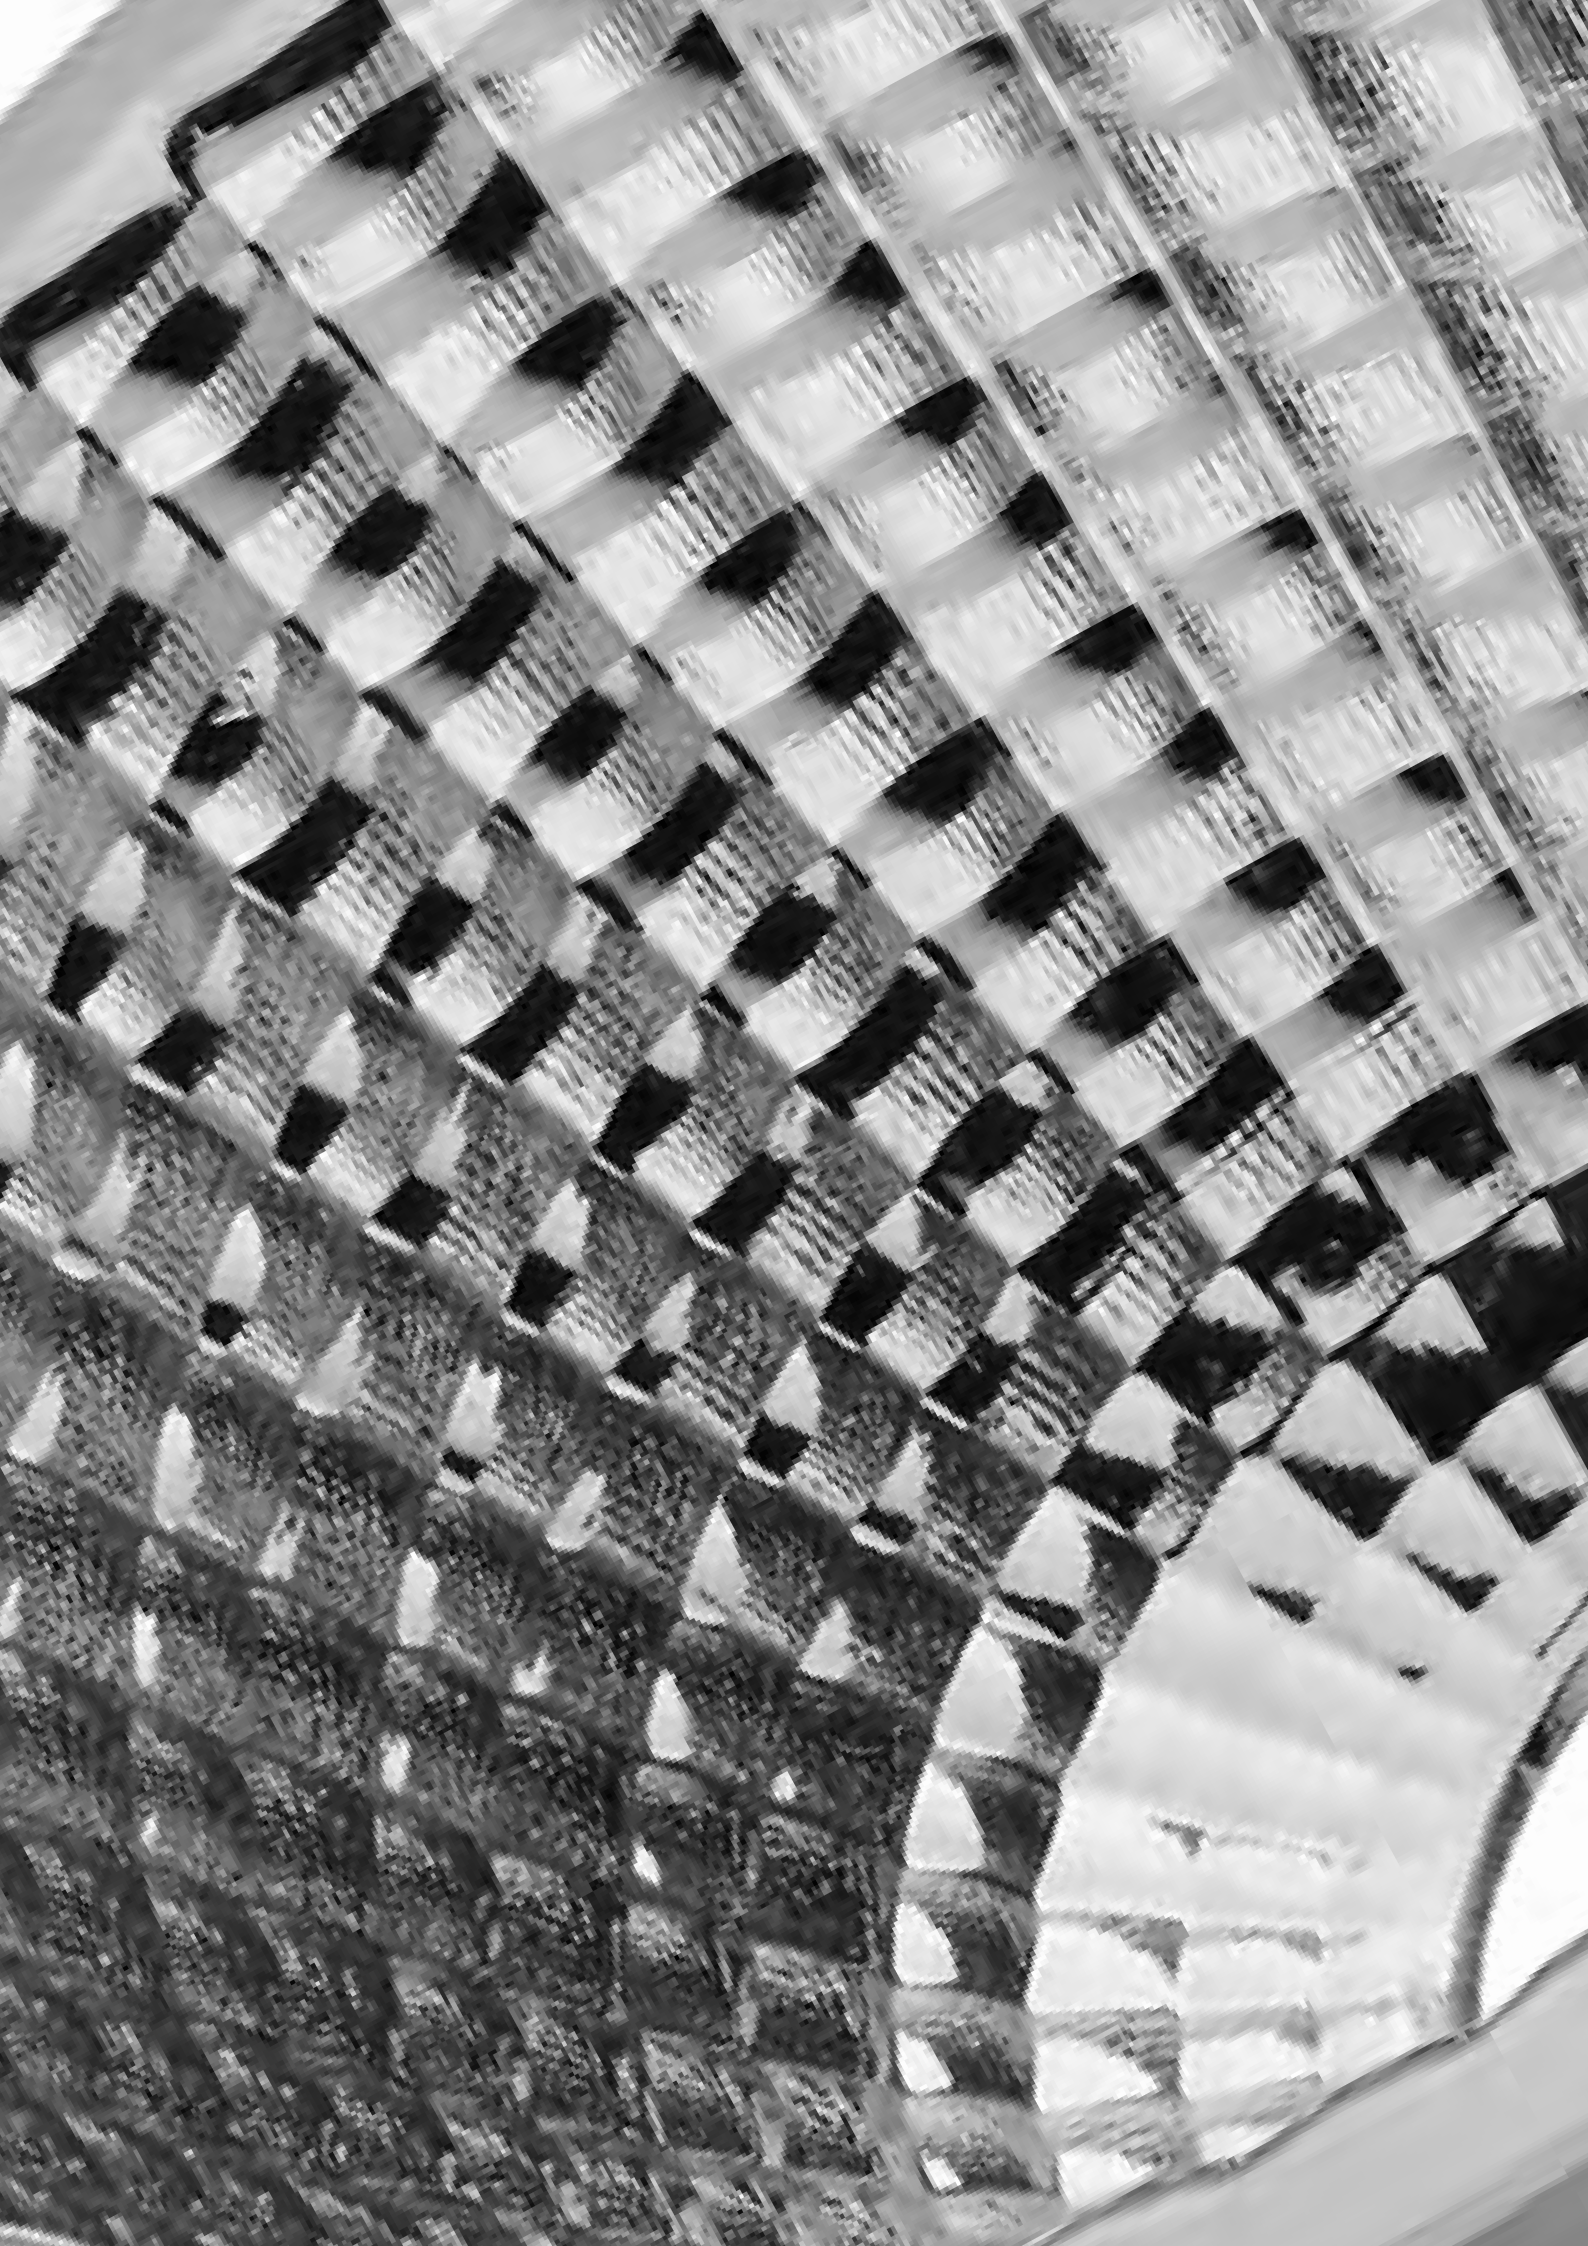An aerial, black and white photograph of a modern building's facade. The facade is composed of a grid of rectangular panels, some of which are dark and others light, creating a complex, textured pattern. The perspective is from a high angle, looking down at the building, which is slightly tilted. The overall effect is one of geometric precision and architectural detail.

design & development

Reliable engineering, material quality and technologically advanced optical solutions, together with constant research to devise refined, shapes and lines, are the assets that SYV draws upon to create and offer cuttingedge products combining technology and aesthetic appeal.

lighting design


SYV offers to its customers a lighting design service through its skilled engineers and the lighting design software DIALUX and AGI32. By supplying CAD plans of the areas for which lighting design is requested, our department will be pleased to recommend the most suitable luminaires and installations. Upgrades of the photometric archives can be downloaded free of charge from our website or supplied upon request.

Sustainable & Energy Efficient Lighting




Save AED on your lighting

LED lighting can reduce your lighting energy output by up to 86%. Combined with the lights and professional installation, this equals substantial savings.



It's a low-cost carbon cutting upgrade for your business

It is most effective and viable solution to reduce your carbon footprint in particular in existing buildings.



Use LED lighting to cut your carbon footprint & reduce your light costs

Use LED lighting to cut your carbon footprint.



Save time & money replacing blown globes

LED lights can last up to 10 Years so your business don't have to waste your time & effort replacing blown halogen globes.

Specifications

Ingress Protection (IP)

The IP rating refers to the degree of protection provided by electrical equipment enclosures against the ingress of solid objects and liquids in accordance with EN 60529.

IP X Y

X	Protection against the ingress of solid objects	X	Protection against the ingress of liquids
0	No protection	0	No protection
1	≥ 50 mm diameter	1	Vertically falling drops of water
2	≥ 12.5 mm diameter	2	Direct sprays of water up to 15° from vertical
3	≥ 2.5 mm diameter	3	Direct sprays of water up to 60° from vertical (rain)
4	≥ 1.0 mm diameter	4	Water splashed from all directions
5	Protected against dust (no harmful deposit)	5	Low-pressure water jets from all directions
6	Totally protected against dust	6	High-pressure water jets or heavy seas
		7	Temporary immersion
		8	Prolonged immersion at a depth specified by the manufacturer
		9K	High-pressure steam/water jet cleaning

SYV luminaires are rated :

- IP65 for floodlights
- IP66, 68 and 69K for tubular luminaire

The following tests have been conducted under laboratory conditions in accordance with ISO 20653. Materials and design choices are optimised to maintain this level of ingress protection throughout the life of the luminaire.

The following tests have been conducted under laboratory conditions in accordance with ISO 20653. Materials and design choices are optimised to maintain this level of ingress protection throughout the life of the luminaire.

Rating	Test Procedure
IP65	Spraying the enclosure from all practicable directions with a stream of water from a standard-compliant test nozzle • Test duration : 3 minutes • Flow rate : 12.5 l/min • Distance between the nozzle and enclosure surface : 2.5 m - 3 m • Pressure : 30 kPa
IP66	Spraying the enclosure from all practicable directions with a stream of water from a standard-compliant test nozzle • Test duration : 3 minutes • Flow rate : 100 l/min • Distance between the nozzle and enclosure surface : 2.5 m - 3 m
IP68	Immersion of the luminaire in cold water • Immersion of the luminaire at a depth of 4 m (0.4 Bar) • The luminaire is switched on for 1 hour before commencement of the test • The luminaire is switched off during the test • Immersion duration : 1 hour
IP69K	Spraying the enclosure with a high-pressure jet of hot water to reproduce food industry cleaning conditions. • Test duration : 2,5 minutes • Flow rate : 15 l/min • Distance between the nozzle and enclosure surface : 100 and 150 mm • Pressure : 10000 kPa • Water temperature : 80 °C

Impact resistance (IK)

Luminaires from the SYV indoor lighting range are rated IK07 (floodlights) and IK10 (all other products). The following tests have been conducted under laboratory conditions in accordance with EN 62 262. Materials and design choices are optimised to maintain this level of impact resistance throughout the life of the luminaire.

The ingress protection levels of our luminaires remain intact following mechanical impact, as long as this remains below the impact energy guaranteed by the IK rating.

XX	Protection against the ingress of solid objects
00	No protection
01	Impacts of 0.14 joules impact energy (the energy of a 14 g weight falling 1 m)≥ 12.5 mm diameter
02	Impacts of 0.2 joules impact energy (the energy of a 20 g weight falling 1 m)
03	Impacts of 0.35 joules impact energy (the energy of a 35 g weight falling 1 m)
04	Impacts of 0.5 joules impact energy (the energy of a 50 g weight falling 1 m)
05	Impacts of 0.7 joules impact energy (the energy of a 70 g weight falling 1 m)
06	Impacts of 1 joules impact energy (the energy of a 100 g weight falling 1 m)
07	Impacts of 2 joules impact energy (the energy of a 200 g weight falling 1 m)
08	Impacts of 5 joules impact energy (the energy of a 500 g weight falling 1 m)
09	Impacts of 10 joules impact energy (the energy of a 1 kg weight falling 1 m)
10	Impacts of 20 joules impact energy (the energy of a 2 kg weight falling 1 m)

Electrical safety classification

The electrical safety classification defines a level of electrical protection for the user as the basis for measuring the potential risk of a person coming into contact with mains voltage (230 V AC) or any other voltage hazardous to humans (above 50 V in dry surroundings).

SYV luminaires comply with electrical safety classes I, II and III in accordance with EN 60598-1.

Class	Protection	Symbol
Class I	Equipment that is electrically insulated and provided with a connection to earth to protect exposed metal parts that could become live accidentally	
Class II	Equipment that has double or reinforced insulation of its active components (functional and physical insulation) with no earthing of metal parts	
Class III	Operation at very low voltage (< 50 V)	

Fire resistance

The glow wire test is governed by the IEC 60695-2-10 standard, and is applied to determine whether the luminaire installed in a building could potentially burn and, more importantly, could contribute to the spread of fire. The diffusers fitted to luminaires from the Sammode indoor range pass the glow wire test at a temperature of 650 °C. The borosilicate protective glass and metal luminaire components are deemed non-flammable.

The test consists of applying a wire heated to a fixed temperature (650 °C, 850 °C, 960 °C, etc.) for a fixed period (5 or 30 seconds, for example) and examining the behaviour of the luminaire housing, especially if it catches fire.

OUTDOOR

Inground lights

			
Astria 018	Tira 019	Tumo 021	Hana 022
			
Mio 024	Gil 025	Cada 027	Granco 028
			
Trado 031	Quara 033		

Wall lights

			
Eakarea 037	Unter 037	Ganz 038	Halber 038
			
Elvio 040	Alfio 041	Aloria 044	Pamplona 045
			
Coruna 046	Alwar 048	Arlet 049	Enire 052
			
Zimal 052	Luz 053	Ojo 055	Reja 057

Wall lights

			
Verja 059	Jarra 060	Canyon 061	Matia 061
			
Warfel 063	Lavare 066	Luna 067	Mirar 068
			
Techar 069	Vara 070	Tello 072	Johan 072

Step lights

			
Riva 074	Dobulet 075		
			
Grado 080	Dentro X 081	Vito 084	Ruto 085
			
Velor 086	Elvas 089	Kiko 090	Bermeo 093
			
Glor 095	Cario 097	Jerez 098	Vera 100

Step
lights



Adra | 101



Elda | 103



Vic | 104



Coria | 107

Bollard
lights



Ario | 146



Anxo | 147



Ocata | 150



Jacin | 151

Ceiling
lights



Teja | 111



Agua | 113



Domo | 114



Ace | 117



Kugel | 118



Cofa | 119



Arnel | 121



Quadret | 123



Faro | 126



Almora | 128

Compound
lights



Vida | 132



Felix | 133



Canyon | 134



Warfel | 136



Jarra | 138



Pezzo | 139



Petto | 140

Spike
lights



Teo | 175



Elmo | 178



Kevin | 179



Speren | 181



Eolo | 181



Corzo | 183



Garzon | 184



Stano | 186

Spike lights /
Tree -ring
lights



Clavo | 190



Árboles | 195



Kevin | 196

Underwater
lights



Modo | 199



Ello | 202



Ela | 203



Zona | 207



Miizar | 208



Franco | 209



Maximo | 210

Wallwasher
lights



Luvio | 213



Verso | 216



Selina | 217



Minas | 219



Agora | 220



Elisa | 223



Juno | 226



Gina | 227

Flood lights



Ewo | 232



Lunio | 235



Cedro | 236



Pandora | 241

Flood lights



Spartan | 242



Nexo | 244



Enyo | 246



Piatto | 247

Area Post-
Top lights



Invitar | 252



Mecho | 253



Alan | 255



Britto | 256



Lucio | 257

Street lights



Liceo | 261




Jabo | 265

Safety and Testing Measures


A well-developed inspection process is implemented for both raw materials and finished lights. This involves not just the use of advanced testing instruments but also adherence to established protocols and the expertise of technicians with years of experience in this field.



Utilizing state-of-the-art CNC and die casting processing machines and technologies, we create lighting fixtures with exquisite craftsmanship, offering flexibility in customized services.

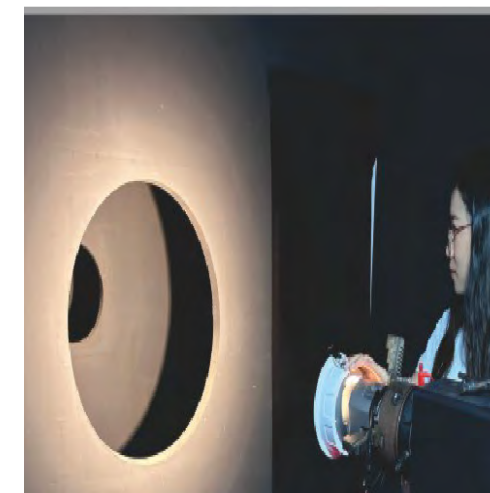

We possess patents and proprietary tooling modules for all our manufactured products, guaranteeing sustained and stable long-term after-sales service for our customers.

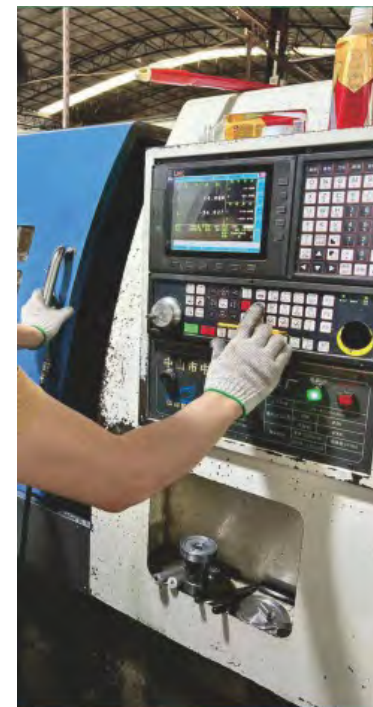

Within the company's testing and inspection apparatus, we have systems for testing photometric, colorimetric, and electrical parameters. Additionally, we conduct waterproof tests such as IPX5, IPX6, IPX7, and IPXB. Other equipment includes a goniophotometer, a constant temperature or humidity incubator, a corrosion testing machine, a cryogenic storage



A comprehensive system for ensuring product quality, coupled with the capability for autonomous research and development of new lights.





IN-GROUND



SYV | Outdoor Inground

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Stainless Steel #316
Finish: Satin 316 Stainless Steel
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Driveways, Walkways, Pathways

Load Capacity: 300~500 Kilos
Voltage: 18V DC with 2M of power cable

Product Options:

Wattage: 1W
CCT: 3000K - 6000K
Beam Angle: 15° / 25° / 60°
Finish: Matt Black
Control: DALI / DMX / 1-10V / Triac / PWM




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Astria	17476	7W	3000K	750lm	350mA	38°	Ø79x75	Ø65
	18102	3W	3000K	270lm	700mA	15°	Ø52x48	Ø40

DC 18V IP 67  CRI>80


   

7W

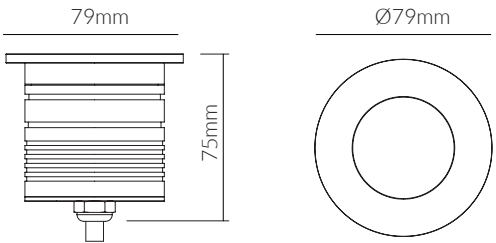

Cutout: Ø65mm

3W

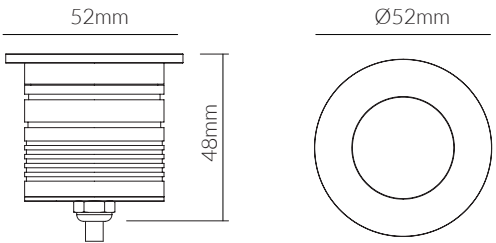

Cutout: Ø40mm

ASTRIA

Product Specifications:

Lamp Type: CREE LED
Driver: Meanwell Driver
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminum
Diffuser: Clear Glass
Finish: Chrome
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality


Product Options:

Wattage: 3W
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Tira R	12929	1W	3000K	90lm	350mA	24°	Ø40x95	Ø32
	16370	1W	4000K	95lm	350mA	24°	Ø40x95	Ø32
	16371	1W	6000K	100lm	350mA	24°	Ø40x95	Ø32
Tira S	12930	1W	3000K	90lm	350mA	24°	Ø40x95	Ø32
	16372	1W	4000K	95lm	350mA	24°	Ø40x95	Ø32
	16373	1W	6000K	100lm	350mA	24°	Ø40x95	Ø32

AC220-240V IP 65  CRI>80


 SDCM <3  Class I  IK06 



Product Specifications:

Lamp Type: GU10
Operating Temp.: -20°C ~ +50°C
Material: Aluminium body+ Stainless steel cover
Finish: Chrome
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality

Load Capacity: 500 Kilos

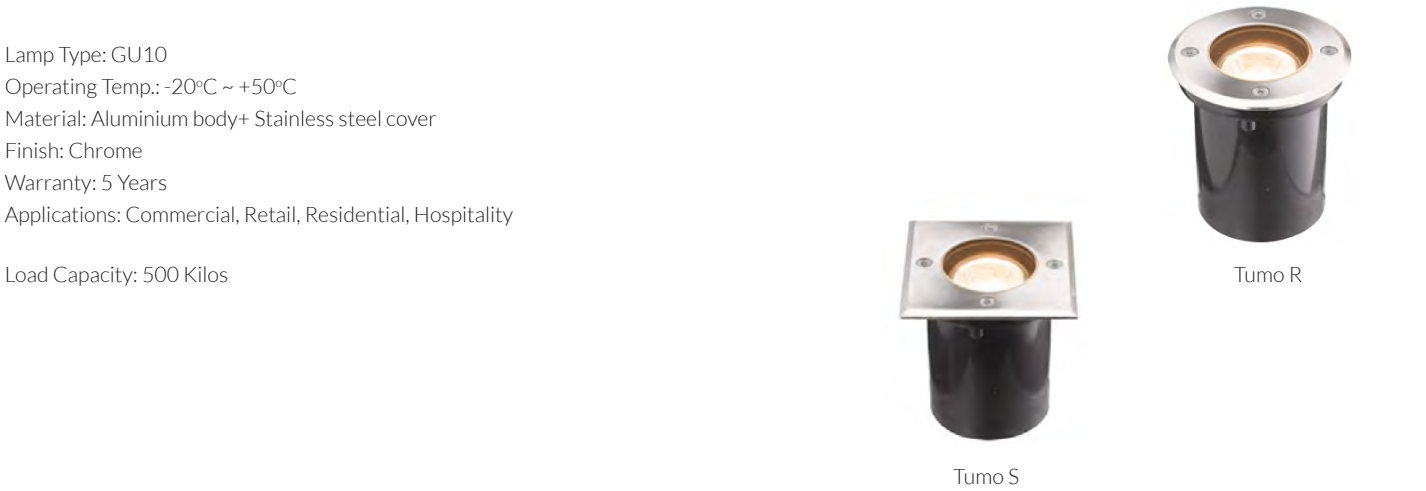

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Tumo R	12923	-	-	-	-	-	Ø105x120	Ø32
Tumo S	12924	-	-	-	-	-	Ø105x120	Ø32

IP 65




 SDCM <3

 Class I

 IK06





Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminum+stainless steel #316
Finish: Chrome
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Driveways, Walkways, Pathways

Output Voltage: 2-4V

Product Options:

Wattage: 3W / 7W
CCT: 3000K - 6000K, RGB
Beam Angle: 10° / 38°
Control: Switchable / DALI / 1-10V / Triac
Accessories: Honeycomb louver/Half shading



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Hana	19092	2W	3000K	200lm	60mA	25°	Ø38x85	Ø36

AC220-240V

IP 67




CRI>80

 SDCM <3

 Class I

 IK06



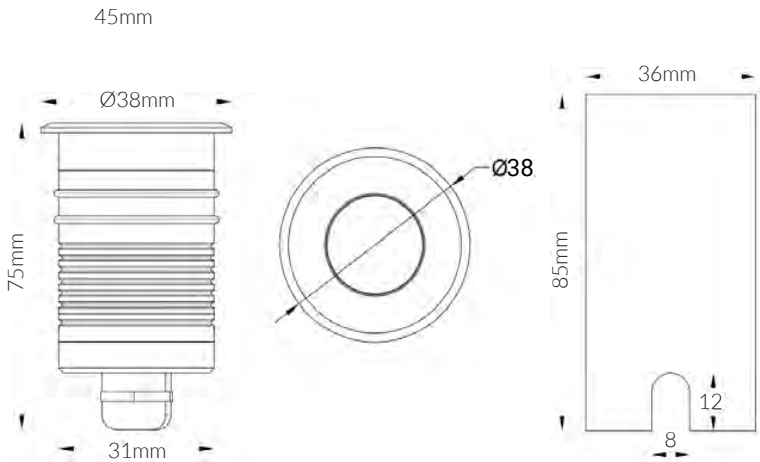



MIO
DC24V

SYV | Outdoor Inground

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: SS316 front cover
Finish: Matt Silver Anodized
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Driveways, Walkways, Pathways


Product Options:

Wattage: 3W / 5W
CCT: 3000K - 6000K
Finish: Matt Black
Control: Switchable / DALI / 1-10V / Triac



2 - way Light

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Mio	18508	1W	3000K	90lm	350mA	Asymmetric	Ø64x102	Ø51
DC 24VIP 67CRI>80								SDCM <3Class IIK08

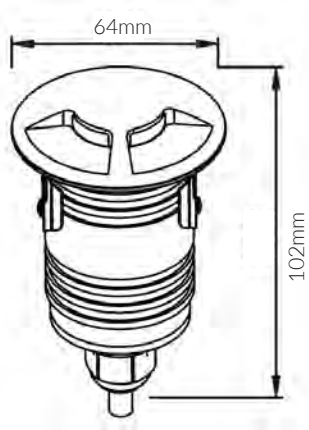

Cutout: Ø51mm

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminum body
Diffuser: Tempered Glass
Finish: Silver
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Walkways, Pathways, etc



Product Options:

Wattage: 3W, 4W, 5W, 8W, 10W
CCT: 3000LK - 6000K, RGB
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

		SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Gil	(1 way)	19564	1W	3000K	80lm	250mA	60°	Ø48x59	Ø31
	(1 way)	19159	10W	3000K	800lm	700mA	60°	Ø100x100	Ø86
	(2 way)	19160	10W	3000K	800lm	700mA	60°	Ø100x100	Ø86
	(4 way)	19161	10W	3000K	800lm	700mA	60°	Ø100x100	Ø86

AC220-240V

IP 67


CRI>90

SDCM <3

Class I

IK10

CE

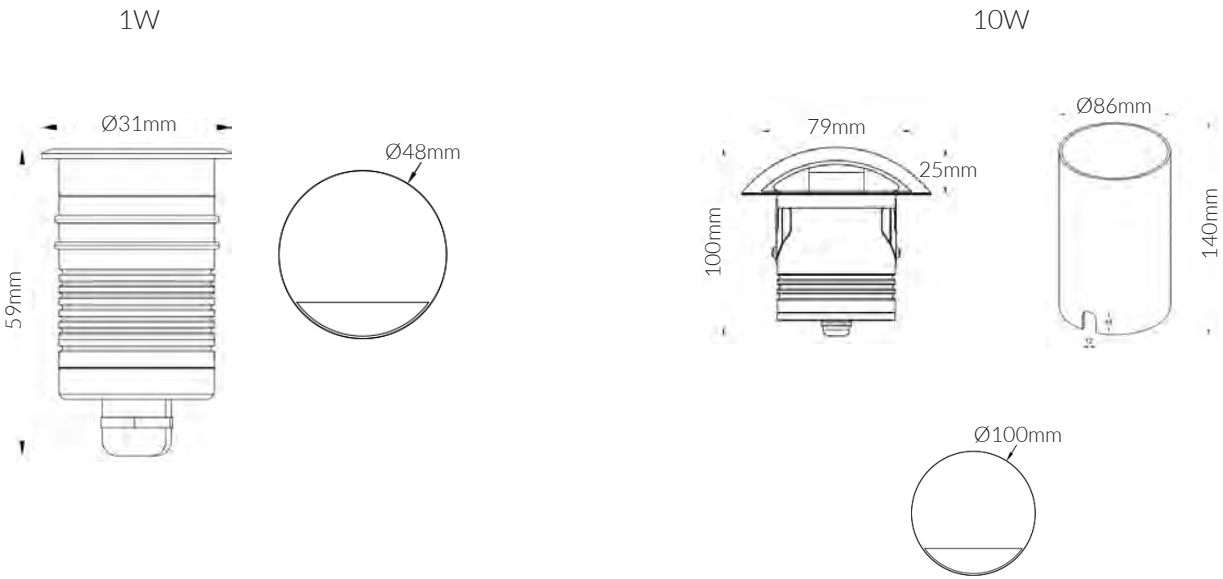

GIL
1 way / 2 way / 4 way

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminium+Stainless Steel #316
Light Window: Step tempered clear glass.T=8mm
Gasket: : Molding shaped seal
Finish: Stainless steel 316L#
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Load Capacity: 1720 Kilos


Product Options:

Wattage: 3W / 7W / 18W
Beam Angle: 15° / 30° / 50°
Control: Switchable / TRIAC / 1-10V / DALI / PWM
Accessory: Mounting Sleeve, Honeycomb Louver

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cada	15406	9x1.2W	3000K	972lm	64mA	20°	Ø210x179	Ø102
	15919	9x1.2W	4000K	1,026lm	64mA	20°	Ø210x179	Ø102
	15920	9x1.2W	6000K	1,080lm	64mA	20°	Ø210x179	Ø102

AC220-240V IP 67  CRI>80

 SDCM <3  Class I  IK10 

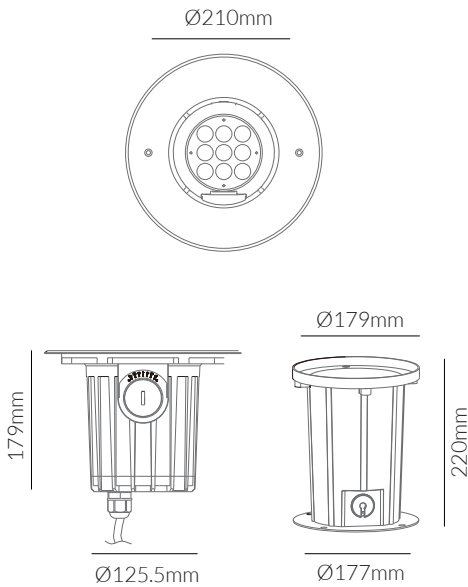

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminium+Stainless Steel #316
Light Window: Step tempered clear glass.T=8mm
Gasket: : Molding shaped seal
Finish: Stainless steel 316L#
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Load Capacity: 2129 Kilos


Product Options:

Wattage: 4W / 6W / 20W
Beam Angle: 10° / 15° / 20°
Control: Switchable / TRIAC / 1-10V / DALI / PWM
Accessory: Mounting Sleeve, Honeycomb Louver

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Granco	15120	25W	3000K	2,250lm	133mA	30°	Ø250x190	Ø153
	15849	25W	4000K	2,375lm	133mA	30°	Ø250x190	Ø153
	15850	25W	6000K	2,500lm	133mA	30°	Ø250x190	Ø153

AC220-240V IP 67  CRI>80

 SDCM <3  Class I  IK10 

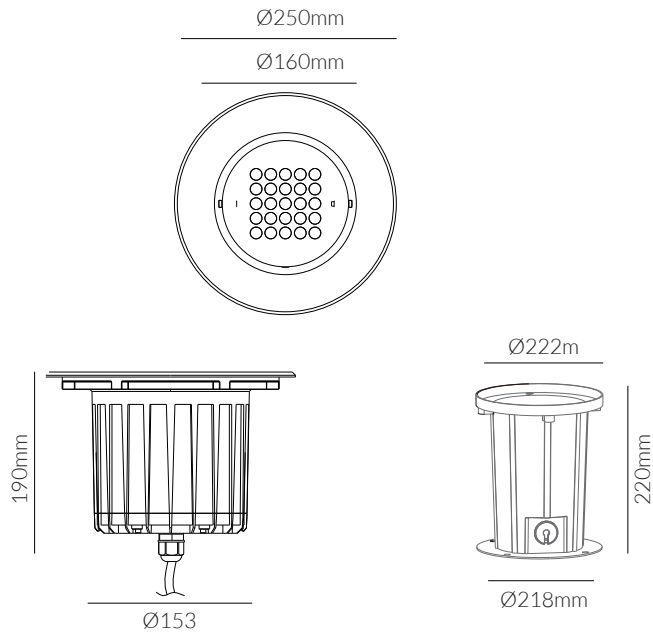



Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminium+Stainless Steel #316
Light Window: Step tempered clear glass.T=8mm
Finish: Stainless steel 316L#
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality

Load Capacity: 2578 Kilos


Product Options:

Wattage: 6x3W
Beam Angle: 9° / 15° / 30° / 45° / 60°
Control: Switchable / TRIAC / 1-10V / DALI / PWM
Accessory: Mounting Sleeve, Honeycomb Louver




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Trado	15118	3x2W	3000K	540lm	30mA	20°	Ø116x102	Ø70
	15873	3x2W	4000K	570lm	30mA	20°	Ø116x102	Ø70
	15874	3x2W	6000K	600lm	30mA	20°	Ø116x102	Ø70
	15119	6x2W	3000K	1,080lm	56mA	45°	Ø173x86	Ø118.5
	15875	6x2W	4000K	1,140lm	56mA	45°	Ø173x86	Ø118.5
	15876	6x2W	6000K	1,200lm	56mA	45°	Ø173x86	Ø118.5

AC220-240V
IP 65
CRI>80

SDCM <3
Class I
IK08
CE



Mounting Sleeve



Mounting Sleeve



TRADO



Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +55°C
Material: Aluminum+PMMA
Finish: Silver
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Walkways, Pathways, etc

Load Capacity: 3000kgs

Product Options:

CCT: 2700K-6000K, RGB
Accessories: Stainless Steel Cap, Connector
Control: Triac/Dali/1-10V/PWM/DMX512

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Quara	20844	14.4W/Mtr	3000K	1,152lm	-	120°	L:1000 x W:30.5 x H:54.8mm	-
DC 24V IP 68 120° CRI>80 SDCM <3 Class I IK10 								

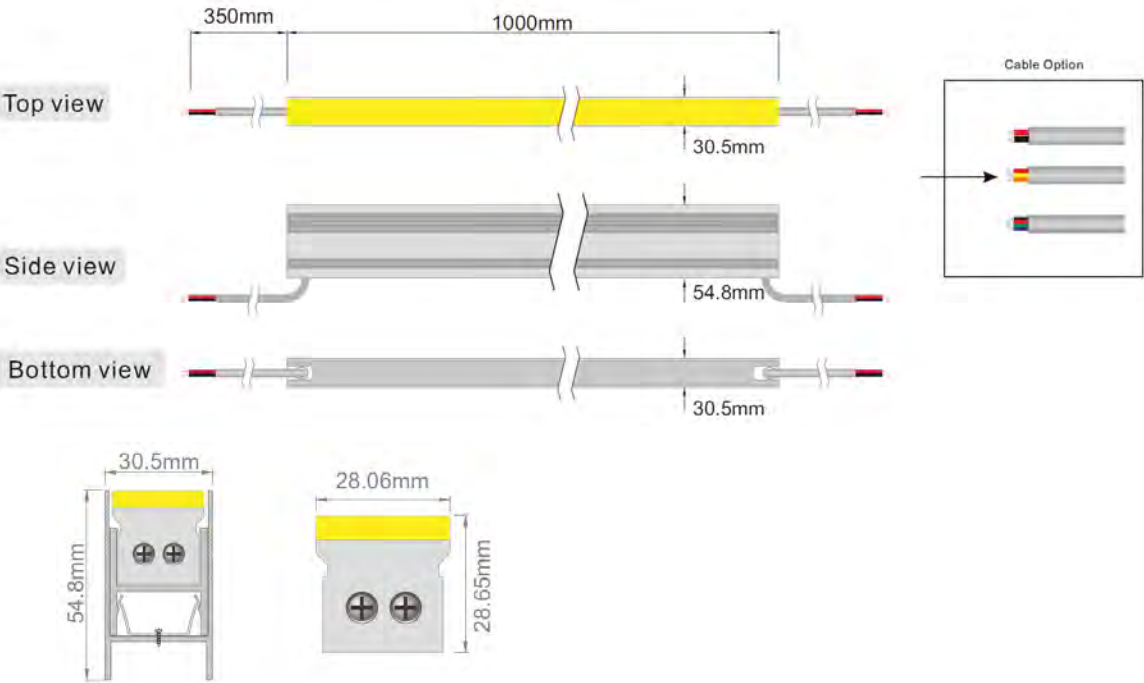

QUARA
IK10 Rating



WALL

Product Specifications:

Lamp Type: 2 x GU10
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum body+Tempered Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Eakare	13582	-	-	-	-	-	155x93x63	-

IP 65

Product Specifications:

Lamp Type: 2 x E27 PAR30
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum body+Tempered Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Unter	14344	-	-	-	-	-	300x175xØ108	-

IP 65

Product Specifications:

Lamp Type: E27 PAR30
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum body+Tempered Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ganz	13578	-	-	-	-	-	180x175xØ108	-

IP 65

Product Specifications:

Lamp Type: 2 x E27 PAR30
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum body+Tempered Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Halber	13579	-	-	-	-	-	300x175xØ108	-

IP 65

ELVIO

IN CONCRETE BODY



SYV | Outdoor Wall Lights

Product Specifications:


Lamp Type: LUMENS LED
Operating Temp.: -20°C ~ +50°C
Material: Concrete Body
Finish: Beige Satin Cement
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Elvio	15721	8W	3000K	720lm	10mA	-	Ø114x232	-
AC220-240V IP65  15° CRI>80 PF>0.9  SDCM <4  Class II  IK05 								



Product Specifications:


Lamp Type: LUMILED's
Operating Temp.: -20°C ~ +50°C
Material: Concrete Body
Finish: White sandstone
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Finish: White
Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Alfio	18875	12W	3000K	1,260lm	350mA	152°	L:130 x W:150 x H:165mm	-
AC220-240V IP 65  CRI>80 PF>0.9     								

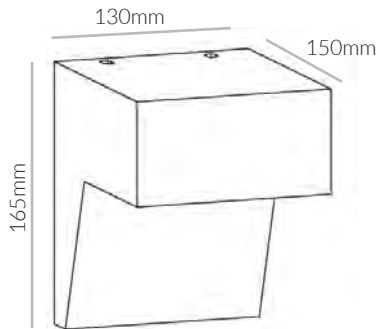



ALORIA

SYV | Outdoor Wall Lights

Product Specifications:

Lamp Type: PHILIPS LED
Operating Temp.: -20°C ~ +50°C
Material: Concrete Body
Finish: White sandstone & Yellow Granite
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality



SKU 18874



SKU 19724


Product Options:

CCT: 3000K - 6000K
Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Aloria	18874	13W	3000K	720lm	300mA	72°	Ø160 x 142mm	White sandstone
	19724	13W	3000K	720lm	300mA	72°	Ø160 x 142mm	Yellow Granite

AC220-240V IP65  CRI>80 PF>0.9

 SDCM <3  Class II  IK05 



Product Specifications:

Lamp Type: PHILIPS LED
Operating Temp.: -20°C ~ +50°C
Material: Concrete body
Finish: Grey 18
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality





 Lifetime Warranty on Body

Product Options:

CCT: 3000K - 6000K
Finish: Stone Pattern effect, White Sandstone, Black Sandstone, Natural Grey
Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Pamplona	19904	10W	3000K	900lm	300mA	82.7°	L:135 x W:110 x H:200mm	-
AC220-240V IP 65  82.7° CRI>80 PF>0.9 SDCM <3 Class I IK05 Flicker Free CE								



Product Specifications:

Lamp Type: PHILIPS LED
Operating Temp.: -20°C ~ +50°C
Material: Concrete Body
Finish: Grey 18
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality





 Lifetime Warranty on Body

Product Options:

CCT: 3000K - 6000K
Finish: Stone Pattern effect, White Sandstone, Black Sandstone, Natural Grey
Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cutout
Coruna	19903	6W	3000K	540lm	150mA	82.7°	L:135 x W:110 x H:170mm	-
AC220-240V IP 65  82.7° CRI>80 PF>0.9 SDCM <3 Class I IK05 Flicker Free CE								



ALWAR

Adjustable Beam Optics

SYV | Outdoor Wall Lights

Product Specifications:


Lamp Type: PHILIPS LED
Operating Temp.: -20°C ~ +50°C
Material: Concrete Body
Finish: White sandstone & Yellow Granite
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Finish: Stone Pattern effect, White Sandstone, Black Sandstone, Natural Grey
Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Finish
Alwar	19143	12W	3000K	1,080lm	300mA	2° - 80° (Adjustable)	L: 95 x W: 120 x H: 190mm	Dark Grey Granite
AC220-240V IP 65 2°-80° CRI>80 PF>0.9 SDCM <3 Class II IK05 								

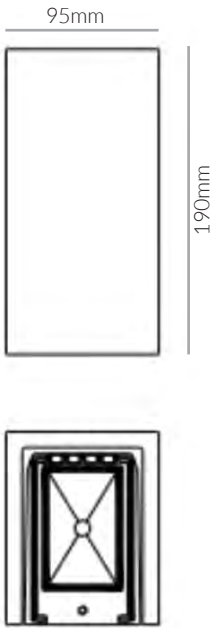

 Lifetime Warranty on Body

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Concrete Body
Finish: Dark Grey Granite
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 10W
CCT: 3000K - 6000K
Finish: White
Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Arlet	19144	5W	3000K	450lm	350mA	360°	D: 200 x H: 70mm	-

AC220-240V

IP65

360°

CRI>80

PF>0.9


SDCM <3

Class I

IK05

Flicker Free



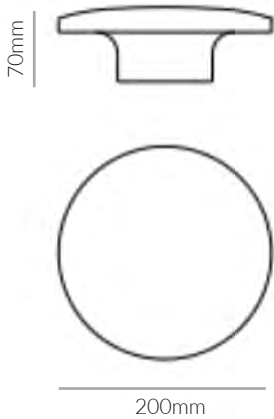



Product Specifications:

Lamp Type: GU10
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum body+ Tempered Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Enire	13576	-	-	-	-	-	80x68xØ93	-

IP 65



Class I

IK06



Product Specifications:

Lamp Type: 2 x GU10
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum body+ Tempered Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Zimal	13577	-	-	-	-	-	150x68xØ93	-

IP 65



Class I

IK06



Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium / Glass
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Finish: Black / Silver / White / Rust
Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Luz	14696	2x6W	3000K	1,080lm	300mA	73°	240x94x106	-
	15658	2x6W	5000K	1,176lm	300mA	73°	240x94x106	-

AC220-240V

IP65

73°

CRI>80


PF>0.9

SDCM <5

Class I

IK06





Product Specifications:


Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminium + PC
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Finish: White
Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ojo	15400	10W	3000K	900lm	300mA	360°	Ø240x48	-
AC220-240V IP65 360° CRI>80 PF>0.9 SDCM <5 Class I IK06 								



OJO

Product Specifications:


Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +50°C
Material: Die-casting aluminum + Frost PC
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Reja	15249	9W	3000K	900lm	350mA	142°	Ø188x98	-
AC220-240V IP65 142° CRI>80 PF>0.9 SDCM <5 Class I IK06 								

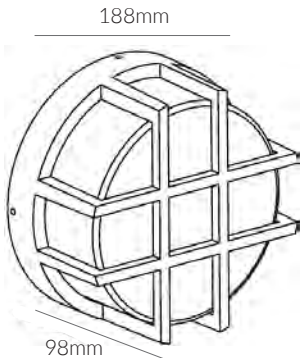

Product Specifications:


Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +50°C
Material: Die-casting aluminum + Frost PC + Clear PC
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Verja	15250	9W	3000K	900lm	350mA	138°	138x238	-
AC220-240V IP 65  CRI>80 PF>0.9    								



Product Specifications:


Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium + PC
Finish: Black
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 3000K - 6000K
Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Jarra	15398	9W	3000k	810lm	350mA	185°	110x176x239.5	-
AC220-240V IP 65  CRI>80 PF>0.9    								



Product Specifications:

Lamp Type: E27
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum body
Finish: Dark Grey
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Canyon	18094	-	-	-	-	-	90x101	-

IP65

Class I

IK08

CE



Product Specifications:

Lamp Type: E27
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum body
Finish: Black
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Matia	18089	-	-	-	-	-	145x205x430	-

IP65

Class I

IK08

CE



Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminum body+ Opal PC Diffuser
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Finish: White
Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Warfel	14472	12W	3000K	1,100lm	300mA	360°	200x180	-

AC220-240V

IP65

360°

CRI>80

PF>0.9


SDCM <5

Class I

IK06

Flicker Free

CE





Product Specifications:


Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminum body+ Opal PC Diffuser
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Finish: White
Control: Switchable / TRIAC / 1-10V / DALI / PWM

				SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)		
Lavare				12098	4x2W	3000K	720lm	300mA	83°	110x50	-		
AC220-240V	IP 65	 83°	CRI>80	PF>0.9				 SDCM <5			 Class I	 IK06	

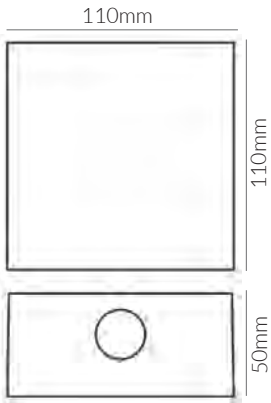

Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium + PC
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 3W
CCT: 3000K - 6000K
Finish: White
Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Luna	15397	10W	3000K	1,156lm	350mA	113°	260x100	-
AC220-240V IP 65  113° CRI>80 PF>0.9 SDCM <5 Class I IK06 CE								

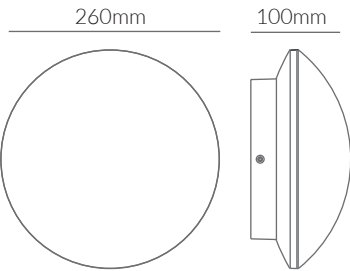

Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium + PC
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 3000K - 6000K
Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Mirar	15399	11W	3000k	990lm	36mA	114°	200x55	-
	(White) 17995	11W	3000k	990lm	36mA	114°	200x55	-
AC220-240V IP 65  114° CRI>80 PF>0.9 SDCM <4 Class I IK08 CE								



Product Specifications:


Lamp Type: NICHIA LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium Alloy #6063
Reflector: Optical reflector. efficiency≥85%
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 4.5W
CCT: 3000K - 6000K
Beam Angle: 10° / 38°
Finish: Black / Grey / White
Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Techar	15408	25W	3000K	2,412lm	350mA	22°	260x100	-
AC220-240V IP 65  CRI>80 PF>0.9    								

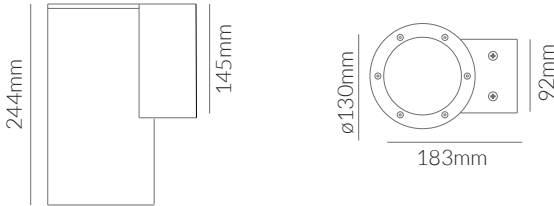

Product Specifications:


Lamp Type: NICHIA LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium Alloy #6063
Reflector: Optical reflector. efficiency≥85%
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 2x8W / 2x12W / 2x18W
CCT: 3000K - 6000K
Beam Angle: 12° / 38°
Finish: Black / Grey / White
Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vara	15409	2x30W	3000K	6,000lm	292mA	25°	160x400	-
AC220-240V IP 65  CRI>80 PF>0.9     								

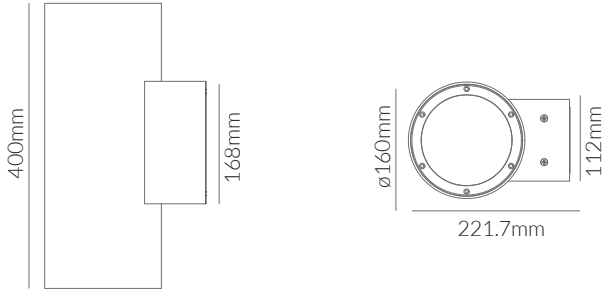



Product Specifications:

Lamp Type: E27
Operating Temp.: -20°C ~ +50°C
Material: Powder coated aluminium and Glass
Finish: Silver
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Tello	16795	-	-	-	-	-	209x94x106	-

IP 65



Class I

IK06

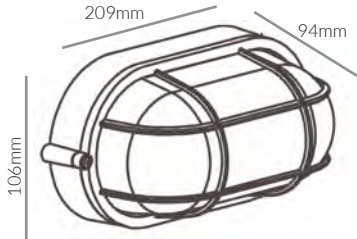

Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +50°C
Material: ABS Body
Finish: Black
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Johan	18495	15W	3000K	1200lm	-	-	L: 250 x W: 120 x H: 73mm	-

IP 65



Class I

IK08

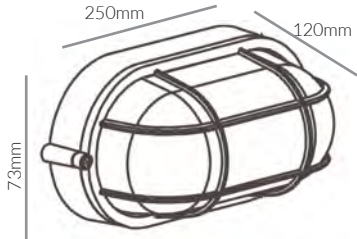



RIVA

SOLANA | Outdoor Wall Lights

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminum+PMMA
Finish: Black
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality

Product Options:

CCT: 3000K - 6000K
Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Riva	18133	24W	3000K	2,160lm	-	36°	800x90	-

AC220-240V

IP65

36°

CRI>80

PF>0.5

Class I

IK06





Product Specifications:

Lamp Type: GU10
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum body+Tempered Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Dobulet	13581	-	-	-	-	-	200x180	-


IP
65




Class I


IK06




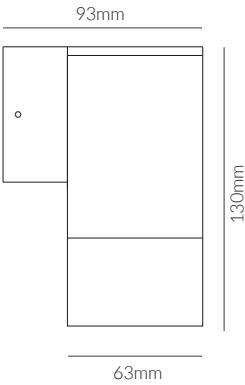



STEP LIGHTS

Asymmetrical Optics

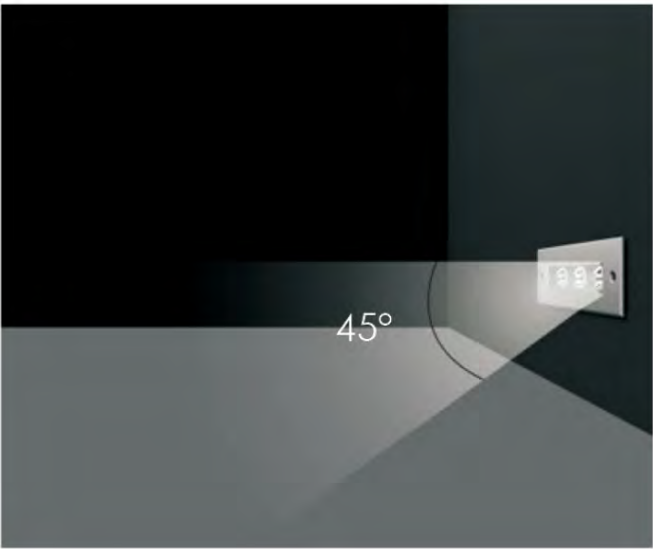

GRADO

SYV | Outdoor Step

Product Specifications:



Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: 12# Die-casting grey powder coated aluminum
T=60-80um Adhesion of ISO class 1/ASTM class 4B
Finish: Chrome
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk



Product Options:

CCT: 3000K - 6000K
Voltage: DC24V
Accessory: Mounting Sleeve
Control: DALI / 1-10V / Triac / PWM

				SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)		
Grado				15191	3x2W	3000K	540lm	25mA	45° 35°	195x63	180		
AC220-240V	IP 65	 45° 35°	CRI>80	PF>0.9						 SDCM <3	 Class I	 IK08	 CE

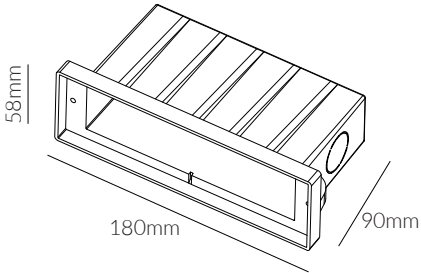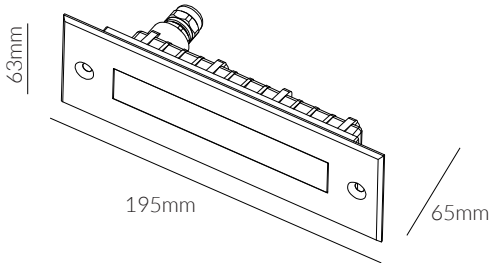

Mounting Sleeve 076#

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminum / glass
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality


Product Options:

Wattage: 5W / 7W
CCT: 3000K - 6000K
Finish: Black / Silver / White / Rust
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Dentro X	17083	6W	3000K	606lm	350mA	80°	193.5x238.5	-
	17084	3W	3000K	285lm	350mA	79°	105x238	-

AC220-240V IP 65  80°/79° CRI>80 PF>0.9

 SDCM <3  Class I  IK06 

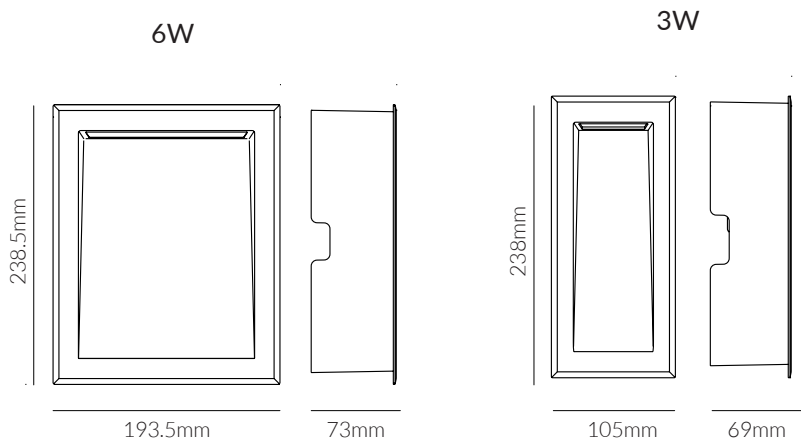

DENTRO X



VITO

SYV | Outdoor Step

Product Specifications:


Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium body+Glass
Finish: Silver
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk



Product Options:

CCT: 3000K - 6000K
Finish: Black / Dark Grey / White / Rust
Accessory: Mounting Sleeve
Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vito	16767	3W	3000K	99lm	25mA	41°	195x52x58	-
AC220-240V IP 65  CRI>80 PF>0.9							 SDCM <3  Class I  IK06 	



Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: 12# Die-casting grey powder coated aluminum T=60-80um
Front Cover: 12# Die-casting aluminum
Glass: Tempered glass T=2mm
Gasket: Molding shaped silicone seal
Finish: Sanded Dark Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk

Product Options:

CCT: 3000K - 6000K
Beam Angle: 40°
Finish: Silver Grey / Sanded Black
Accessory: Mounting Sleeve
Control: DALI / 1-10V / Triac / PWM



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ruto	15405	2W	3000K	180lm	25mA	30°	195x68x63	-

AC220-240V

IP 65

30°

CRI>80


PF>0.9

SDCM <4

Class I

IK10



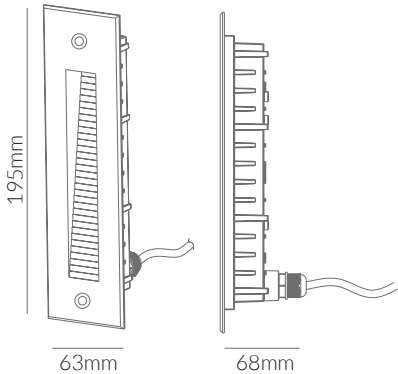

Mounting Sleeve

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium Body
Finish: Nickle Satin
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor

Product Options:

CCT: 3000K - 6000K
Finish: Black / Dark Grey / White / Rust
Control: DALI / 1-10V / Triac



12932



12931

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Velor	12931	3W	3000K	270lm	700mA	50°	80x60	-

	12932	3W	3000K	270lm	700mA	50°	80x60	-
--	-------	----	-------	-------	-------	-----	-------	---

AC220-240V

IP 65

50°

CRI>80



PF>0.9

SDCM <4

Class I

IK06







Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Die-cast aluminum
Finish: Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor



Product Options:

CCT: 3000K - 6000K
Finish: White, Black
Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Elvas	20243	6W	3000K	480lm	260mA	90°	L:210 x W:65 x H:60mm	303x58
AC220-240V IP 65  CRI>90 PF>0.5    								

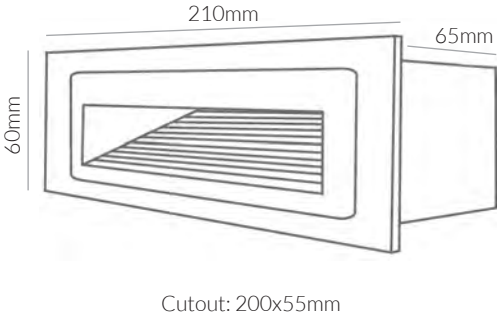

Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Polished stainless steel
Finish: Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor



Product Options:

CCT: 3000K - 6000K
Finish: White, Black
Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Kiko	20247	3W	3000K	240lm	260mA	20°	L:115xW:50x H:85mm	105x75mm
AC220-240V IP 65  CRI>90 PF>0.5    								

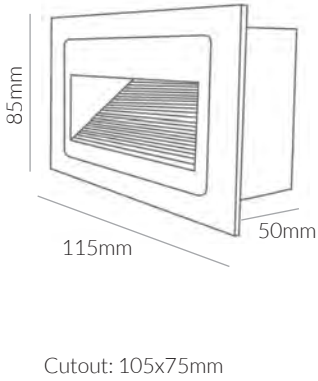



Product Specifications:


Lamp Type: CREE LED
Operating Temp.: -20°C ~ +55°C
Material: Concrete Body
Finish: Grey 18
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor



Product Options:

CCT: 3000K - 6000K
Finish: Stone Pattern effect, White Sandstone, Black Sandstone, Natural Grey
Control: Switchable, TRIAC, PWM, 1-10V, DALI

					SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)	
Bermeo					19902	2W	3000K	180lm	700mA	62.3°	L:100xW:60x H:100mm	-	
AC220- 240V	IP 65	 62.3°	CRI>80	PF>0.5						 SDCM <3	 Class II	 IK04	

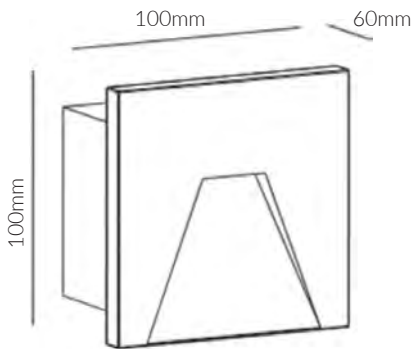

Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Die-cast aluminum
Finish: Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor



Product Options:

CCT: 3000K - 6000K
Finish: White, Black
Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Glor	20245	3W	3000K	240lm	260mA	90°	L:117xW:33x H:117mm	-
AC220-240V IP65  CRI>90 PF>0.5    								

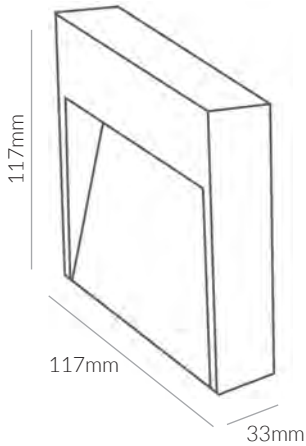

Glor
Surface Mounted

Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Die-cast aluminum
Finish: Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor



Product Options:

CCT: 3000K - 6000K
Finish: White, Black
Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cario	20246	6W	3000K	480lm	260mA	20°	L:160xW:63x H:160mm	150x60mm
AC220-240V IP 65  CRI>90 PF>0.5    								

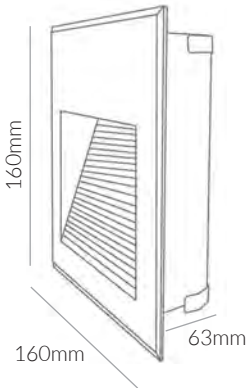

Cutout: 150x60mm

Product Specifications:


Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Die-cast aluminum
Finish: Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor



Product Options:

CCT: 3000K - 6000K
Finish: White, Black
Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Jerez	20244	3W	3000K	240lm	260mA	90°	L:100xW:60x H:162mm	155x95mm
AC220-240V IP 65  CRI>90 PF>0.5    								

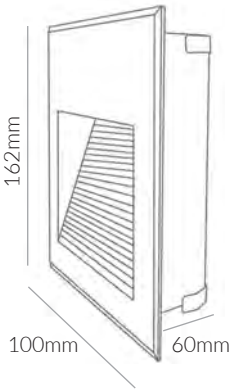

Cutout: 155x95mm



VERA

SYV | Outdoor Step

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminum Alloy
Finish: Matt White & Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor

Product Options:

CCT: 3000K - 6000K
Finish: Black
Control: DALI / 1-10V / Triac / PWM



SKU 20238



SKU 20240




SKU 20239




SKU 20241

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vera	20238	1W	3000K	80lm	290mA	60°	Ø:45 x H:60mm	Ø40
	20239	1W	3000K	80lm	290mA	60°	Ø:45 x H:60mm	Ø40
	20240	1W	3000K	80lm	290mA	60°	L:45xW:60x H:45mm	40x60mm
	20241	1W	3000K	80lm	290mA	60°	L:45xW:60x H:45mm	40x60mm
AC220-240V IP 65  60° CRI>90 PF>0.5  SDCM <3  Class II  IK10 								



Cutout: Ø40mm



Cutout: 40x60mm

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +55°C
Material: Die-cast aluminum
Finish: Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor



Product Options:

CCT: 3000K - 6000K
Finish: Black
Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Adra	20242	3W	3000K	240lm	442mA	20°	L:185xW:40x H:44mm	L:170xW:33x H:41mm

AC220-240V

IP 65



20°

CRI>90

PF>0.5



SDCM <3




Class II




Ik10



100mm

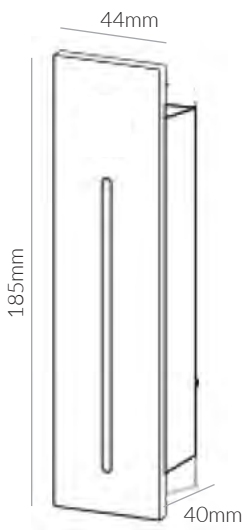


Cutout: L:170 x W:33 x H:41mm

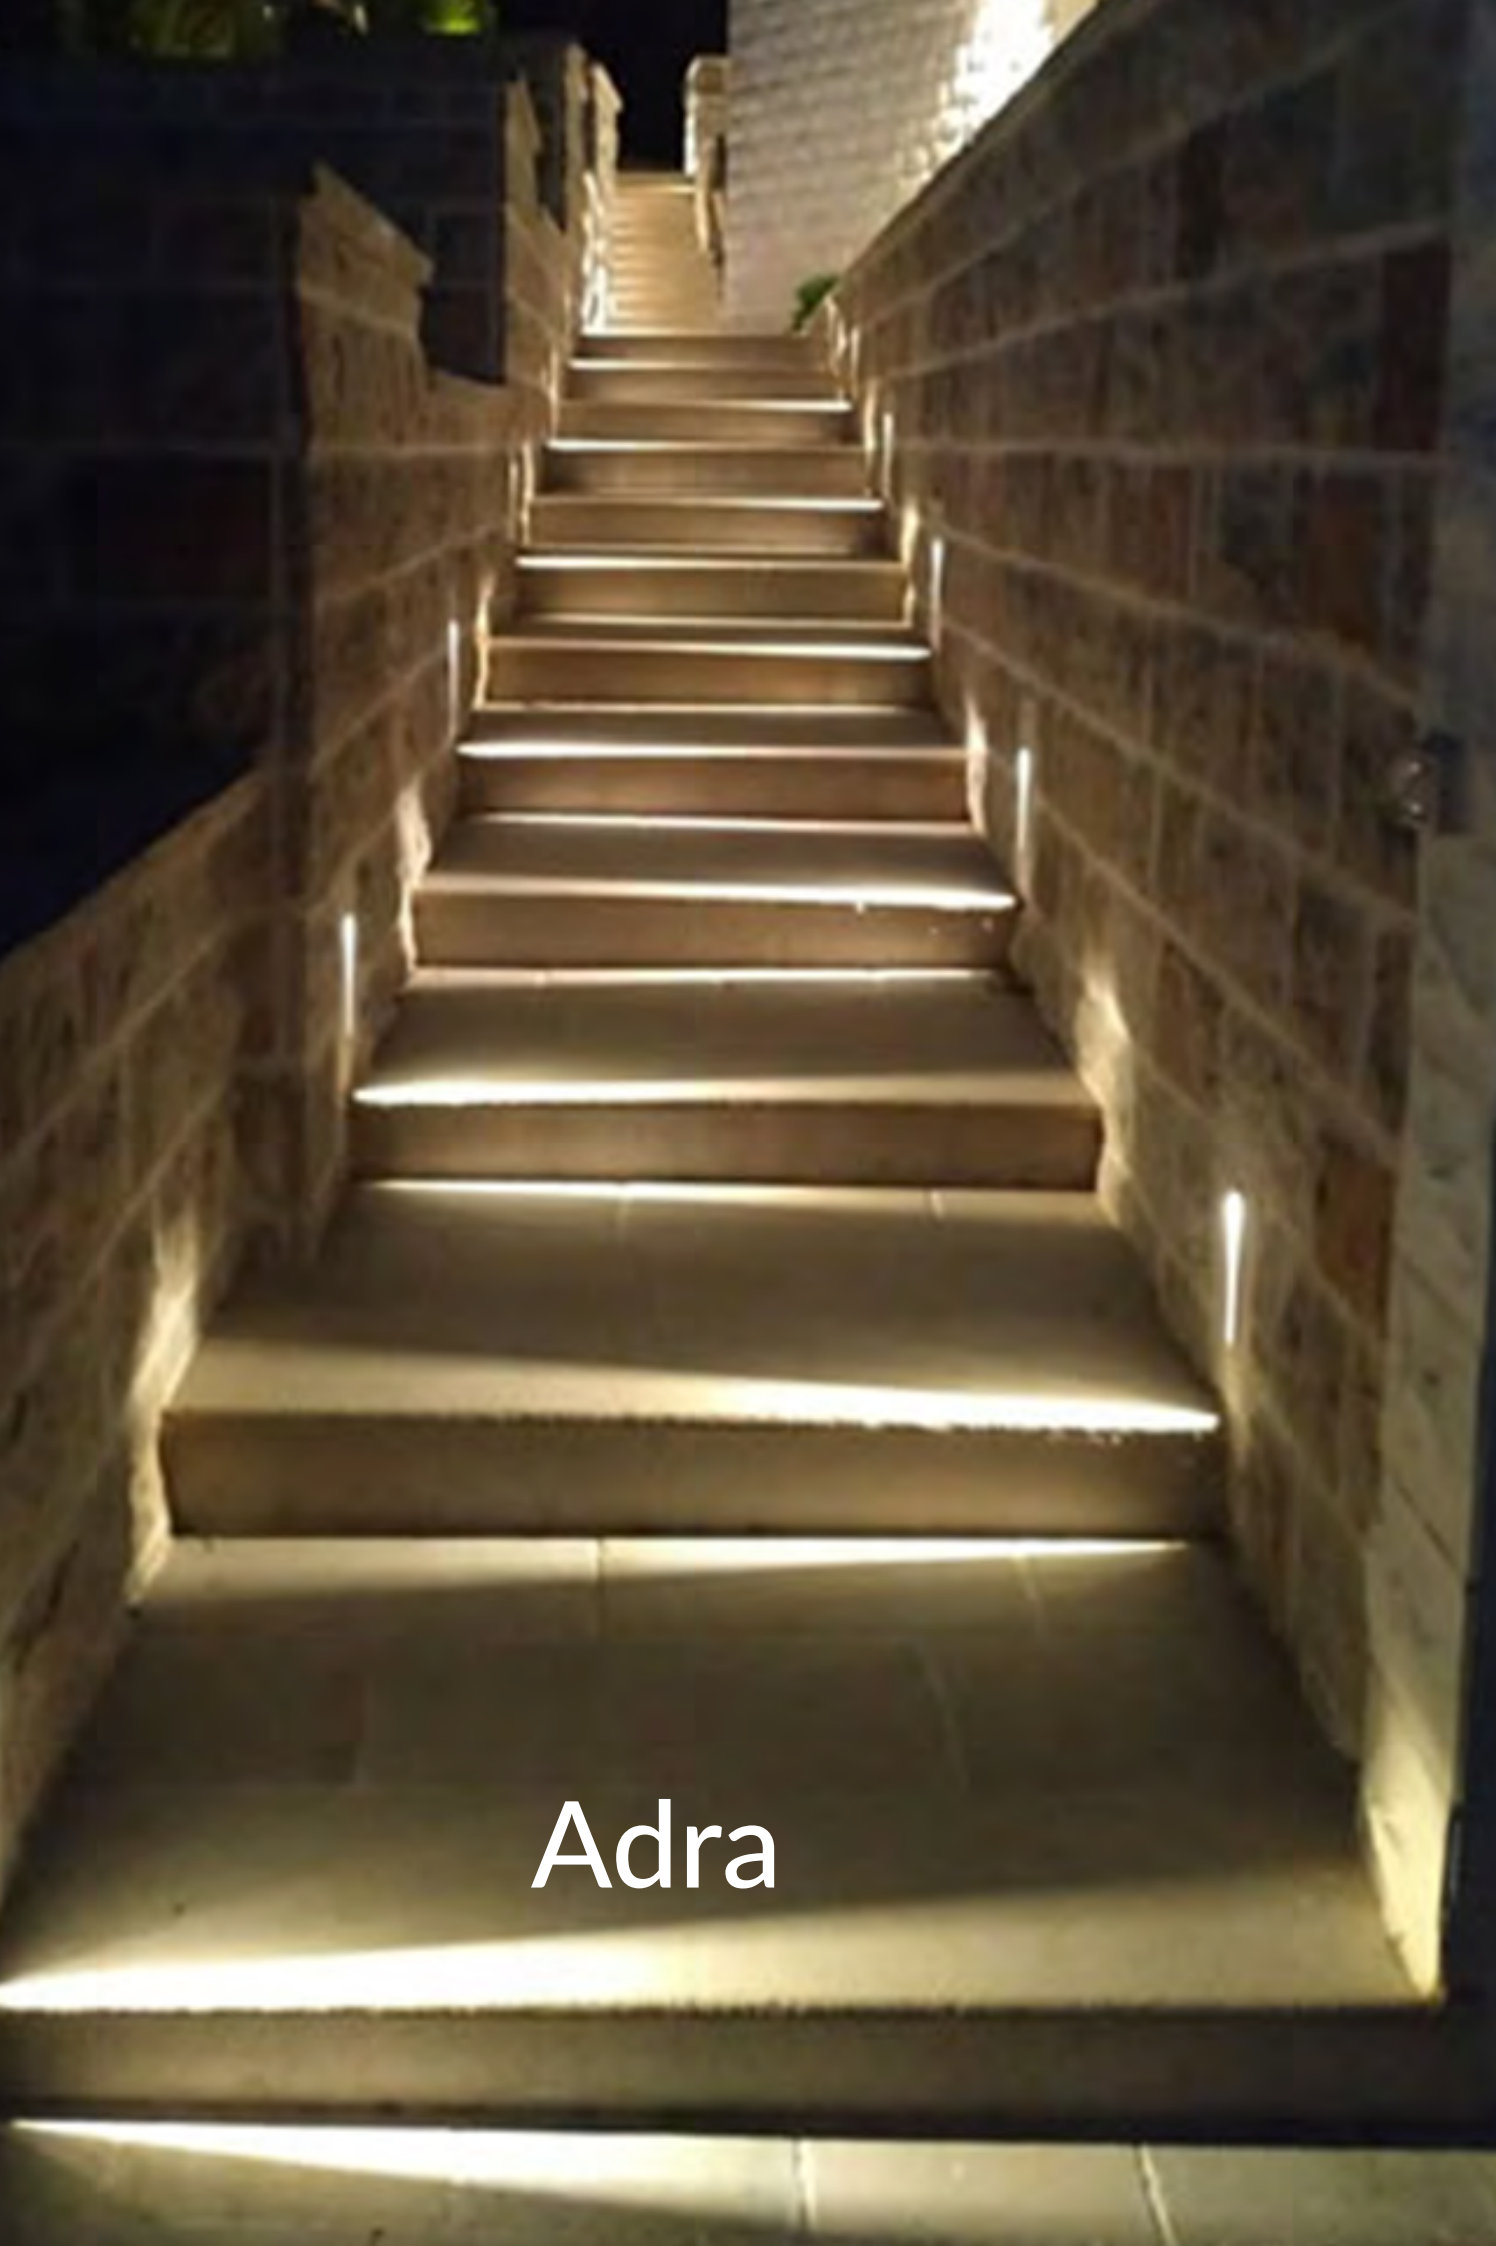

Product Specifications:


Lamp Type: EDISON LED
Operating Temp.: -20°C ~ +50°C
Material: Die-cast aluminum
Finish: Dark Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor



Product Options:

CCT: 3000K - 6000K
Finish: White, Black
Control: DALI / 1-10V / Triac / PWM


	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Elda	18560	5W	3000K	80lm	60mA	120°	L: 100 x W: 85.5 x H: 100mm	88x88
AC220-240V IP 65  CRI>80 PF>0.5    								

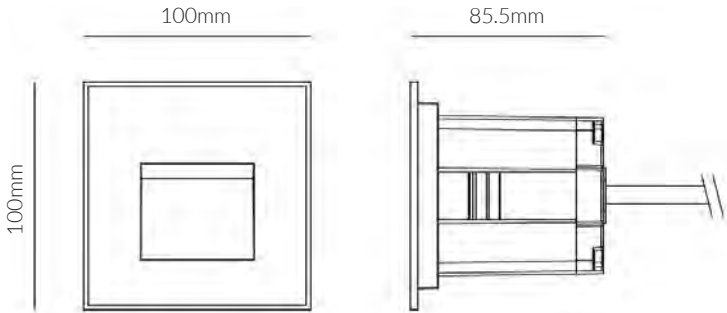

Cutout: 88x88mm

Product Specifications:


Lamp Type: EDISON LED
Operating Temp.: -20°C ~ +50°C
Material: Die-cast aluminum
Finish: Dark Grey
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor




Product Options:

CCT: 3000K - 6000K
Finish: Silver Grey, Black
Control: DALI / 1-10V / Triac / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vic	18559	3W	3000K	630lm	51mA	120°	L: 311 x W: 52 x H: 66mm	303x58
AC220-240V IP 65  CRI>90 PF>0.5    								

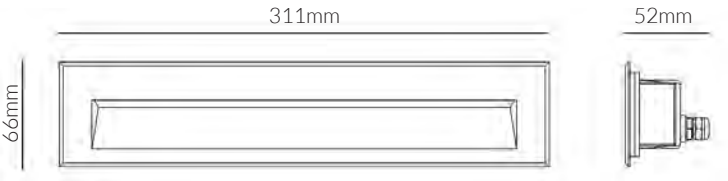

Cutout: 303x58mm

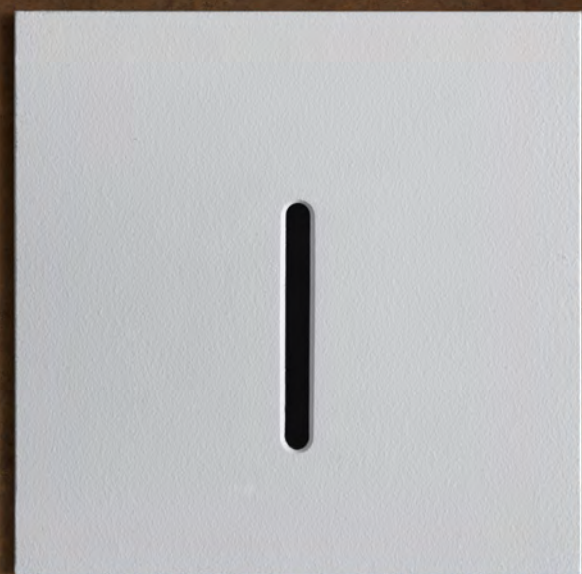

Coria

MAGNETIC STEP LIGHT

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Die-cast aluminum
Finish: White & Black
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Staircase, Sidewalk, Corridor

Product Options:

CCT: 3000K - 6000K
Control: DALI / 1-10V / Triac / PWM


	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Coria	20228	3W	3000K	240lm	-	120°	Ø86x50mm	Ø68mm
	20228	3W	3000K	240lm	-	120°	Ø86x50mm	Ø68mm

AC220-240V IP 65



CRI>80

PF>0.5

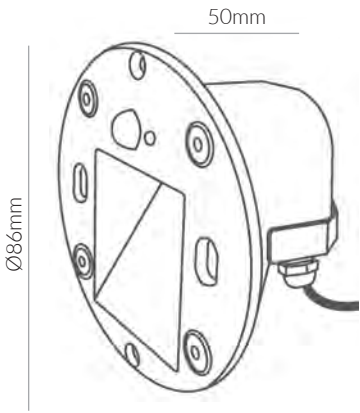

Cutout: Ø68mm




SKU 20229

SKU 20228

FACEPLATE OPTIONS



SKU 20230
Beam 48.9°
Dimension 90x90x50mm
Material Die Cast Aluminium
Finish Sand White
IP Rating 65
Warranty 5 Years




SKU 20231
Beam 48.9°
Dimension 90x90x50mm
Material Die Cast Aluminium
Finish Grey
IP Rating 65
Warranty 5 Years




SKU 20232
Beam 34.6°
Dimension 90x90x50mm
Material Die Cast Aluminium
Finish Sand White
IP Rating 65
Warranty 5 Years




SKU 20233
Beam 34.6°
Dimension 90x90x50mm
Material Die Cast Aluminium
Finish Grey
IP Rating 65
Warranty 5 Years




SKU 20234
Beam 34.6°
Dimension Ø90x50mm
Material Die Cast Aluminium
Finish Sand White
IP Rating 65
Warranty 5 Years



SKU 20235
Beam 34.6°
Dimension Ø90x50mm
Material Die Cast Aluminium
Finish Grey
IP Rating 65
Warranty 5 Years



SKU 20236
Beam 35.3°
Dimension Ø90x50mm
Material Die Cast Aluminium
Finish Sand White
IP Rating 65
Warranty 5 Years



SKU 20237
Beam 35.3°
Dimension Ø90x50mm
Material Die Cast Aluminium
Finish Grey
IP Rating 65
Warranty 5 Years



CEILING

Product Specifications:

Lamp Type: SAMSUNG LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminum
Diffuser: Tempered Glass
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Wattage: 9W
Finish: Silver / White / Rust
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Teja	15560	15W	3000K	1,275lm	350mA	110°	235x235x42	-
	15382	15W	4000K	1,350lm	350mA	110°	235x235x42	-
	15383	15W	6000K	1,425lm	350mA	110°	235x235x42	-

AC220-240V

IP 65

110°

CRI>80


PF>0.9

SDCM <3

Class I

IK06





TEJA

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium Body + PC
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 16W
Finish: Silver / White / Rust
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Agua	14747	10W	3000K	900lm	45mA	107°	220x200x65	-
	15851	10W	4000K	950lm	45mA	107°	220x200x65	-
	15852	10W	6000K	1,000lm	45mA	107°	220x200x65	-

AC220-240V

IP 65



CRI>80

PF>0.9



SDCM <3




Class I



IK06



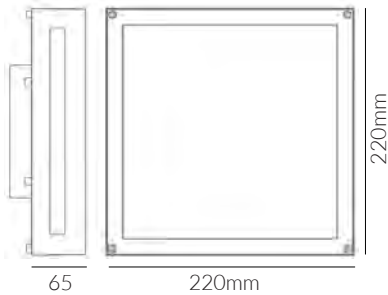

Product Specifications:

Lamp Type: EDISON LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminium Alloy
Diffuser: Opal PC
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Finish: White
Control: Switchable / TRIAC / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Domo	15540	25W	3000K	2,250lm	107mA	105°	Ø270x35	-
	15825	25W	4000K	2,375lm	107mA	105°	Ø270x35	-
	15826	25W	6000K	2,500lm	107mA	105°	Ø270x35	-

AC220-240V

IP 65



CRI>80

PF>0.9



SDCM <5




Class I



IK10



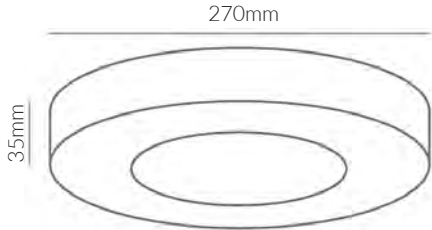



Product Specifications:

Lamp Type: E27 Par30
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminum
Diffuser: Tempered Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Finish: Black / Silver / White / Rust

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ace	13744	-	-	-	-	-	Ø108x140	-
	11193	-	-	-	-	-	Ø108x140	-



IP
65


Class I




IK08





Product Specifications:

Lamp Type: GU10
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminum
Diffuser: Tempered Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality

Product Options:

Finish: Black / Silver / White / Rust

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Kugel	13742	-	-	-	-	-	Ø90x130	-


IP
65


Class I




IK08





Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Extruded Aluminum Alloy #6063
Reflector: : Optical reflector. efficiency≥85%
Painting: Powder coating ,T= 60~80 um
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality




Product Options:

Wattage: 30W
Beam Angle: 9° / 15° / 20° / 45° / 60°
Finish: Sanded Black / Sanded White
Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cofa	15410	6x5W	3000K	3,000lm	146mA	30°	Ø160x200	-
	15837	6x5W	4000K	3,150lm	146mA	30°	Ø160x200	-
	15838	6x5W	6000K	3,300lm	146mA	30°	Ø160x200	-

AC220-240V IP 65  CRI>80 PF>0.9

 SDCM <4  Class I  IK06 

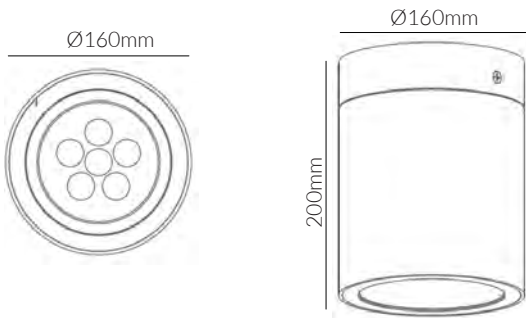

Product Specifications:


Lamp Type: PHILIPS LED
Operating Temp.: -20°C ~ +50°C
Material: Concrete body
Finish: Dark Grey Granite
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K-6000K
Beam: 15° / 24° / 36°
Finish: White Sandstone, Black Sandstone, Natural Grey, Travertine effects
Control: Switchable / TRIAC / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Arnel	19145	9W	3000K	1080lm	250mA	55°	Ø102x120	-
AC220-240V IP65  CRI>80 PF>0.9    								

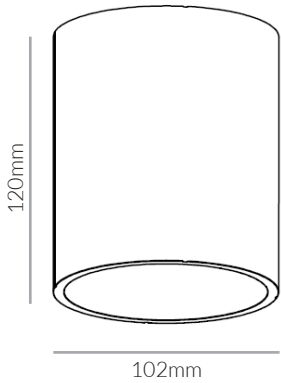

ARNEL

 Lifetime Warranty on Body

Product Specifications:

Lamp Type: GU10
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminum
Diffuser: Tempered Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Finish: Black / Silver / White / Rust

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Quadret	13743	-	-	-	-	-	Ø65x90	-


IP
65


Class I




IK08







FARO WITH SENSOR



SYV | Outdoor Ceiling

Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Polycarbonate Body
Finish: White
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 14W / 30W
CCT: 3000K - 6000K
Finish: Black
Control: Switchable / TRIAC / 1-10V / DALI
Optional: 3 Hours Emergency Back-up Kit / Microwave Sensor


		SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Faro	(Dimming Sensor)	16751	20W	4000K	1,800lm	300mA	120°	Ø300x93.5	-
	(On/Off)	15188	20W	6500K	2,000lm	300mA	120°	Ø300x93.5	-
	(Dimming Sensor)	16752	20W	6500K	2,000lm	300mA	120°	Ø300x93.5	-

AC220-240V IP 66  CRI>80 PF>0.9

 SDCM <6  Class I  IK08  CE

Sensor Details:

Hold Time : 5s/1min/2min/3min
Sensing Range: 50% / 100%
Daylight Sensor: 25 lux/disbale
Mounting Height: Ceiling Mount: 2.5 - 6m
Detection Area: 4-10m (Mounting Height - 3m)

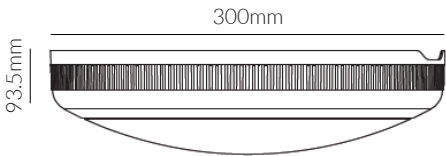



SYV | Outdoor Ceiling

Product Specifications:

Lamp Type: EPISTAR LED
Operating Temp.: -20°C ~ +50°C
Material: ABS Body
Finish: Black & White
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



SKU 18888



SKU 18887


Product Options:

Wattage: 40W / 50W
Control: Switchable / TRIAC / 1-10V / DALI
Optional: 3 Hours Emergency Back-up Kit / Microwave Sensor

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Almora	18888	30W	3000K/4000K/6000K	100-110lm/W	256mA	120°	Ø280x50	-
	18887	30W	3000K/4000K/6000K	100-110lm/W	256mA	120°	Ø280x50	-

AC220-240V IP 65  CRI>80 PF>0.9

 SDCM <3  Class II  IK08 

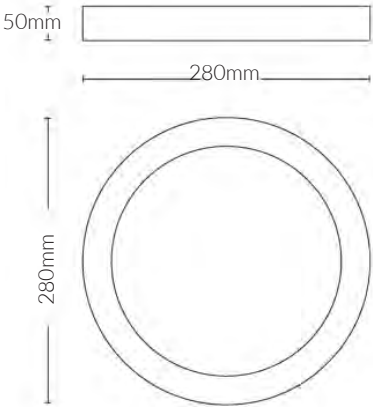



COMPOUND



VIDA

SYV | Outdoor Compound Lights

Product Specifications:

Lamp Type: E27
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium+Frost PC
Finish: Dark Grey
Warranty: 5 Years
Applications: Compound top, Boundary, Pillar, Fence




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Vida	17574	-	-	-	-	-	227x225	-

IP
65



Class I

IK08

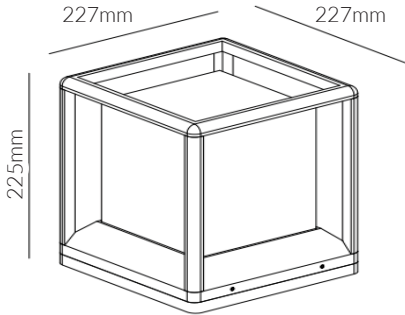

Product Specifications:

Lamp Type: E27
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium+Frost PC
Finish: Dark Grey
Warranty: 5 Years
Applications: Compound top, Boundary, Pillar, Fence




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Felix	18092	-	-	-	-	-	Ø90x350	-

IP
65

Class I

IK08

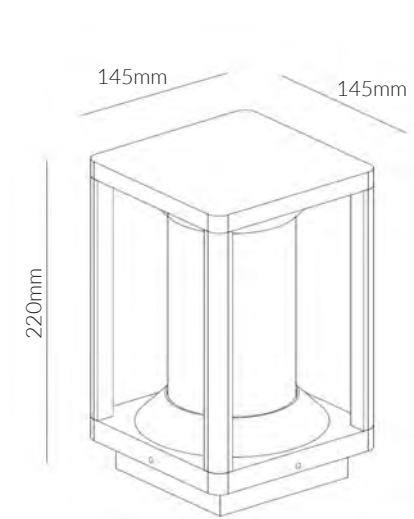

Product Specifications:

Lamp Type: E27
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium+Frost PC
Finish: Dark Grey
Warranty: 5 Years
Applications: Compound top, Boundary, Pillar, Fence




	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Canyon	18092	-	-	-	-	-	Ø90x350	-

IP
65

Class I

IK08

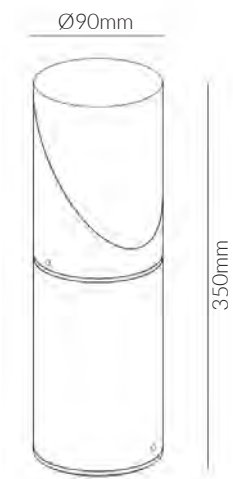



WARFEL

Product Specifications:


Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminum body+ Opal PC Diffuser
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

CCT: 3000K - 6000K
Finish: White
Control: Switchable / TRIAC / 1-10V / DALI / 0-10V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Warfel	14473	12W	3000K	1,100lm	300mA	-	180x230	-
AC220 240V IP 65  CRI>80 PF>0.9							 SDCM <4  Class I  IK06 	





SYV | Outdoor Tree Ring Light

Product Specifications:


Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium + PC
Finish: Black
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoors, Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 3000K - 6000K
Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

		SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)			
Jarra		15469	9W	3000K	810lm	350mA	185°	Ø95x124	-			
AC220 240V	IP 65	 185°	CRI>80	PF>0.9					 SDCM <3	 Class I	 IK08	

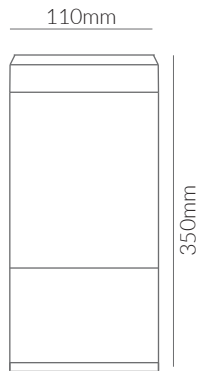

Product Specifications:

Lamp Type: Lumileds
Driver: Philips
Operating Temp.: -20°C ~ +50°C
Material: Concrete Body
Finish: Dark Grey Granite
Warranty: 5 Years on LED
Lifetime Warranty on the Body
Applications: Compound top, Boundary, Pillar, Fence




 Lifetime Warranty on Body

Product Options:

Wattage: 3000K - 6000K
Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Pezzo	19329	20W	3000K	1,340lm	500mA	270°	Ø192x540	-
AC220 240V IP 65  CRI>80 PF>0.9    								

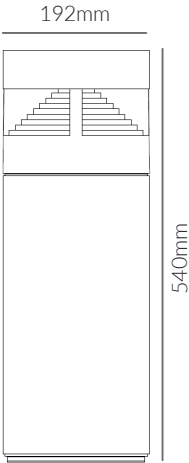

Product Specifications:

Lamp Type: Lumileds
Driver: Philips
Operating Temp.: -20°C ~ +50°C
Material: Concrete Body
Finish: Dark Grey Granite
Warranty: 5 Years on LED
Lifetime Warranty on the Body
Applications: Compound top, Boundary, Pillar, Fence




 Lifetime Warranty on Body

Product Options:

Wattage: 3000K - 6000K
Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Petto	19331	20W	3000K	1,340lm	500mA	250°	Ø192x590	-
AC220 240V IP 65  CRI>80 PF>0.9    								

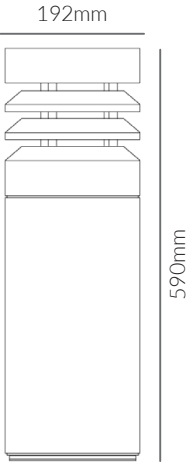

LIFETIME WARRANTY ON BODY





SPIKE

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: 6063 Aluminium Body
Finish: Matt Black
Lifespan: 50,000 Hours
Warranty: 10 Years
Applications: Outdoor, Gardens, Pathways, etc.

Product Options:

Wattage: 4W - 15W
CCT: 3000K - 6000K
Control: Switchable / DALI / 1-10V / TRIAC



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Teo	19162	3W	3000K	240lm	-	10°- 45°	Ø42 x L:82 x H:89mm	-
	19521	10W	3000K	800lm	-	10°- 45°	Ø69 x H:99mm	-

AC220
240V

IP
66

10-45°

CRI>80

PF>0.9


SDCM <3

Class I


IK08



3W

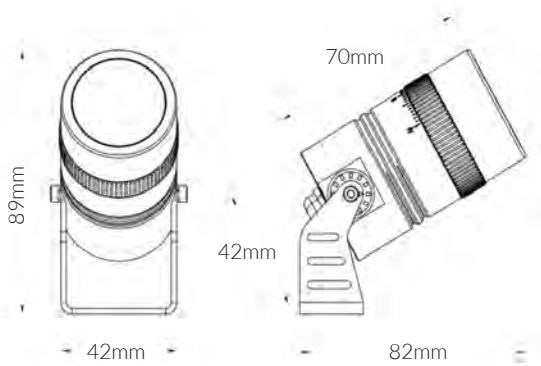


10W

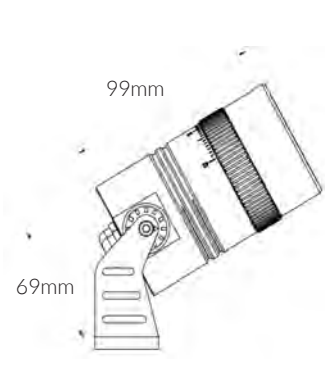

TEO

Zoomable Flood & Spike Light

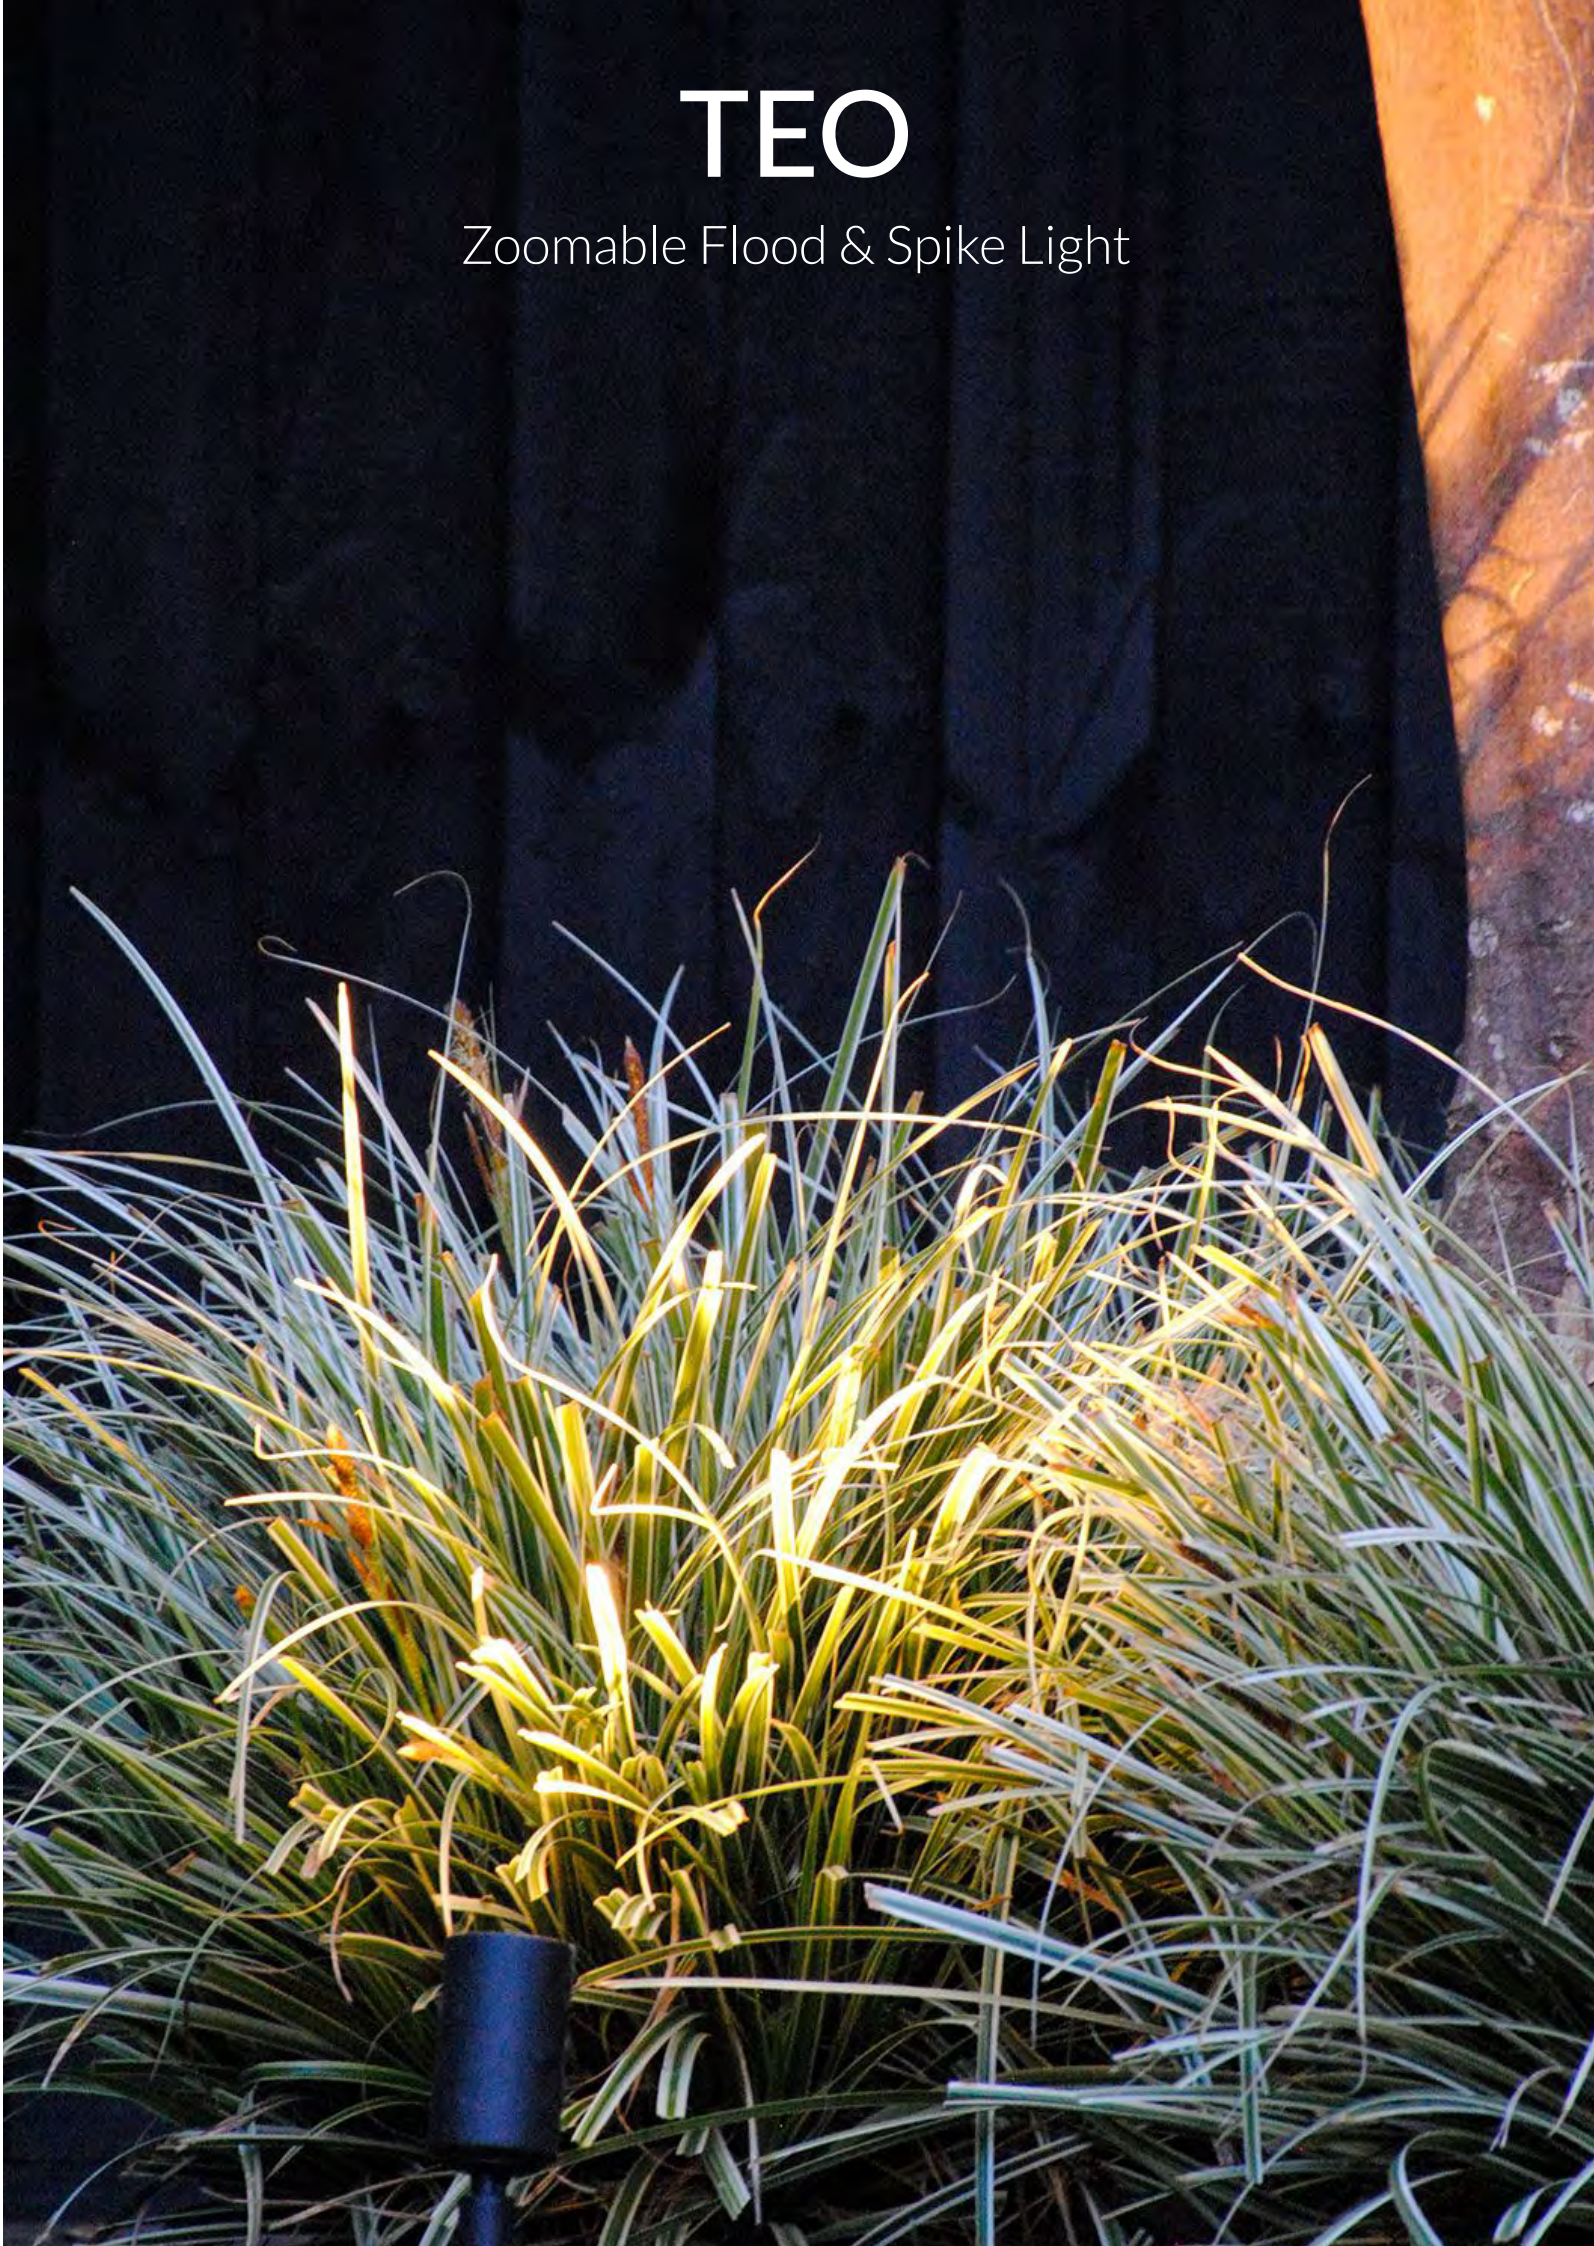

ELMO

Non-Zoomable
Flood & Spike Light

SYV | Outdoor Spike Lights

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium + Tempered Glass
Finish: Black
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



Product Options:

Wattage: 4W
CCT: 3000K - 6000K, RGB, RGBW
Beam Angle: 15° / 36° / 60°
Finish: Dsrk Grey / Matt Silver
Control: Switchable / 1-10V / DALI / TRIAC / PWM
Mounting Type: U bracket & mounting plate for solid ground, spike for soft ground

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Elmo	19946	3W	3000K	240lm	300mA	24°	Ø42 xH:345mm	-
	19947	10W	3000K	800lm	250mA	36°	Ø69 xH:389mm	-

AC220-240V

IP 66

24°/36°

CRI>80


PF>0.9

SDCM <3

Class I

IK08



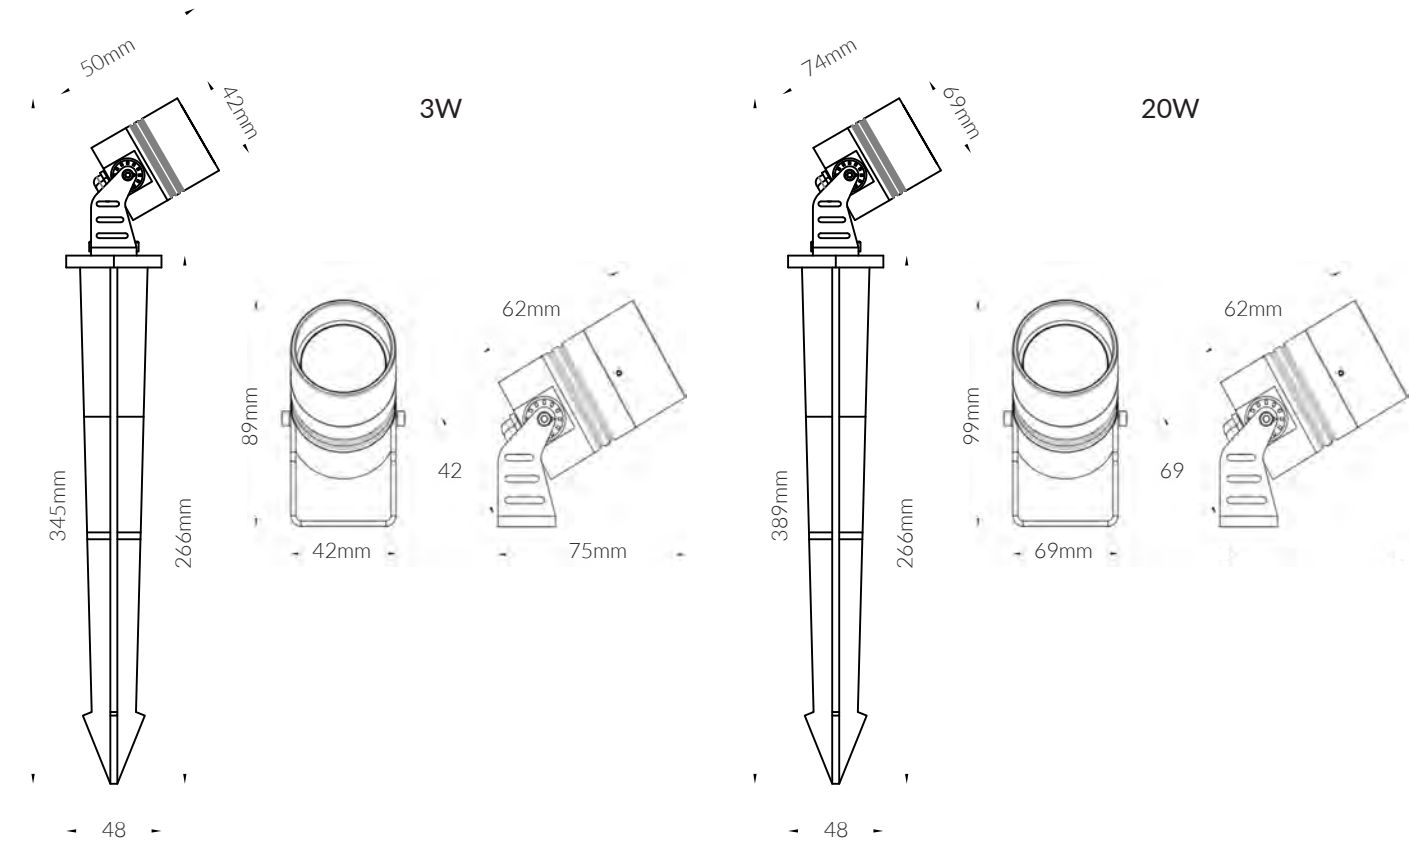


Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium body + Honeycomb Louvre
Finish: Dark Brown
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Outdoor, Gardens, Pathways, etc.

Product Options:

Wattage: 10W / 20W / 30W / 40W / 60W
CCT: 3000K - 6000K
Beam Angle: 15° / 18° / 36° / 60°
Control: Switchable / DALI / 1-10V / TRIAC
Mounting: Pole Coupler, Candlestick Mount, Tree Mount

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Kevin	18759	12W	3000K	1,200lm	250mA	30°	Ø95 x L:124 x H:199mm	-
AC220 240V	IP 66		CRI>80	PF>0.9				

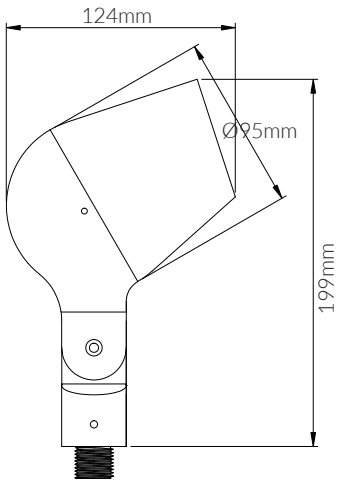


Product Specifications:

Lamp Type: GU10
Operating Temp.: -20°C ~ +50°C
Material: Aluminium body+ Temper Glass
Finish: Dark Grey
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Speren	13580	-	-	-	-	-	Ø100x156x390	-

IP
65

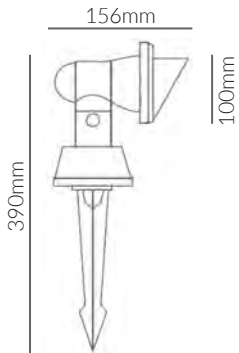


Product Specifications:

Lamp Type: 2 x E27 PAR30
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum body+Tempered Glass
Finish: Black
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Eolo	12106	-	-	-	-	-	363x400	-

IP
65



SPEREN/
EOLO

Product Specifications:

Lamp Type: CITIZEN LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminium Body
Finish: Matt Black Anodized
Lifespan: 50,000 Hours
Warranty: 10 Years
Applications: Outdoor, Gardens, Pathways, etc.



Product Options:

Wattage: 7W
CCT: 3000K - 6000K
Beam Angle: 15° / 24° / 36° / 60°
Control: Switchable / DALI / 1-10V / TRIAC
Accessories: Linear glass lens, Soften glass lens & Honeycomb louver


	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Corzo	16839	5W	3000K	450lm	120mA	20°	Ø76x169	-
	17593	12W	3000K	1,250lm	120mA	20°	Ø86x199	-

AC220
240V

IP
67

CRI>80

PF>0.9

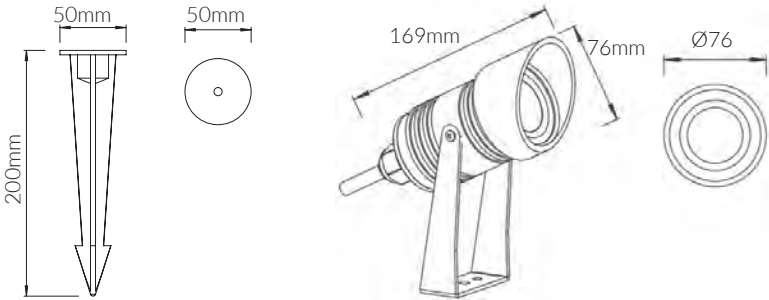

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Die-cast Aluminum
Finish: Matte Silver
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Outdoor, Gardens, Pathways, etc.



Product Options:

Wattage: 1W / 3W / 8W / 9W / 10W / 15W
CCT: 3000K - 6000K
Beam Angle: 40° / 60°
Control: Switchable / DALI / 1-10V / TRIAC
Voltage: DC24V


	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Garzon	17076	5W	3000K	450lm	120mA	24°	Ø45x83	Ø35

DC
12V

IP
67

CRI>80

PF>0.9

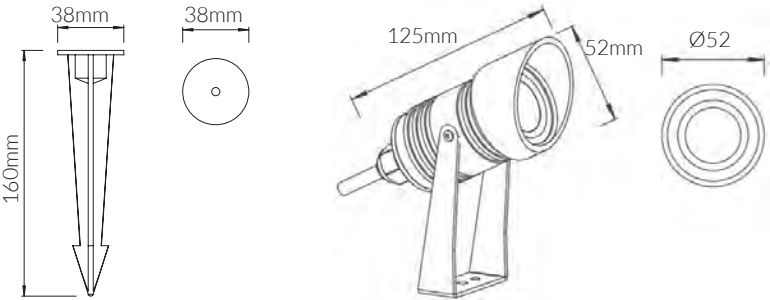



STANO

in Bronze Finish

SYV | Outdoor Spike Lights

Product Specifications:


Lamp Type: MR16
Operating Temp.: -20°C ~ +50°C
Material: Brass Body
Finish: Bronze
Warranty: 10 Years
Applications: Driveways, Walkways, Pathways

Lens: Clear Convex
Socket: Bi Pin
Lead Wire: 3FT



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Stano	16588	-	-	-	-	-	Ø61x185	-

IP 65

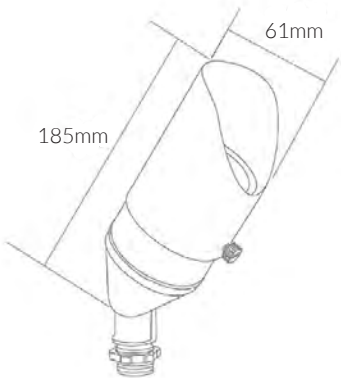



CLAVO

FLOOD & SPIKE



SYV | Outdoor Spike/Flood Light

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium body
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



Product Options:




Wattage: 12W / 20W / 40W
CCT: 3000K - 6000K
Beam Angle: 9° / 15° / 20° / 45°
Finish: Silver Grey / Black / White
Control: Switchable / 1-10V / DALI / TRIAC / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Clavo	15121	6W	3000K	540lm	65mA	30°	Ø70x144	-
	15122	20W	3000K	1,800lm	101mA	45°	Ø120x227	-
	15123	45W	3000K	4,050lm	186mA	45°	Ø160x265	-

AC220-240V IP65  CRI>80 PF>0.9

 SDCM <3  Class I  IK06 

Optional Accessory: Spike



FEATURES





TREE RING LIGHT

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Die Cast Aluminium Body
Finish: Black
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Palm Trees



Product Options:

Wattage: 7W / 8W
CCT: 3000K - 6000K
Beam Angle: 15°/24°/36°/60°/40°*70°
Ring Diameter: Ø300 | Ø400 | Ø500 or any customised size
Voltage: DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Árboles	16947	4x5W	3000K	4x550lm	-	30°	Ø55X173	-
	17563	8x5W	3000K	8x550lm	-	30°	Ø55X173	-

AC220
240V

IP
66



CRI>80

PF>0.9



SDCM <3



Class I



IK05



Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -25°C ~ +60°C
Material: Die-cast Aluminum
Diffuser: Tempered glass & Honeycomb
Finish: Dark Brown
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Palm Trees



Product Options:

Wattage: 10W / 20W
CCT: 3000K - 6000K
Beam Angle: 15°/24°/36°/60°/40°*70°
Ring Diameter: Ø300 | Ø400 | Ø500 or any customised size
Voltage: DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Kevin	17912	4x10W	3000K	4x1100lm	-	30°	Ø95x124	-

AC220
240V

IP
66



CRI>80

PF>0.9



SDCM <3





Class I



IK05



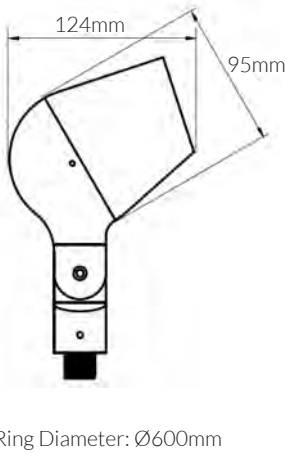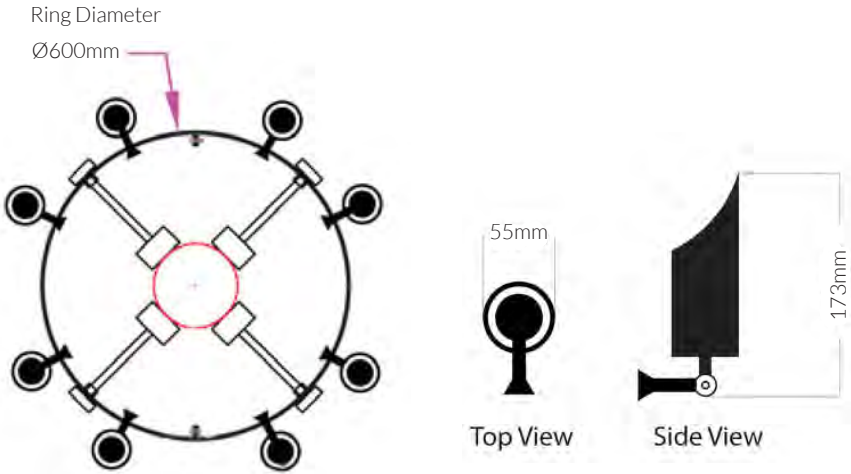



**UNDER
WATER**

Product Specifications:

Lamp Type: NICHIA LED
Operating Temp.: -20°C ~ +50°C
Material: Hard chrome-plated stainless steel #316
Finish: Chrome
Gasket: : Silicone gasket
Excellent heat conductivity aluminum.coefficient of heatConductivity≥2.0w/mk
Automatic Shutdown at 75°C
Temperature of water between -20°C~+50°C less than 1 meter depth
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Pools, Fountains

Product Options:

Wattage: 9W
CCT: 3000K - 6000K
Beam Angle: 15°/24°/45°/60°
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM
Accessory: Tripod Stand

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Voltage
Modo	20669	1x6W	3000K	780lm	416mA	30°	D: 95	DC12V
	20670	3x5.5W	3000K	1,815lm	770mA	30°	D: 127	DC24V
	20671	6x4.5W	3000K	2,970lm	1250mA	30°	D: 150	DC24V

IP 68




CRI>80

SDCM <3

Class I

IK08




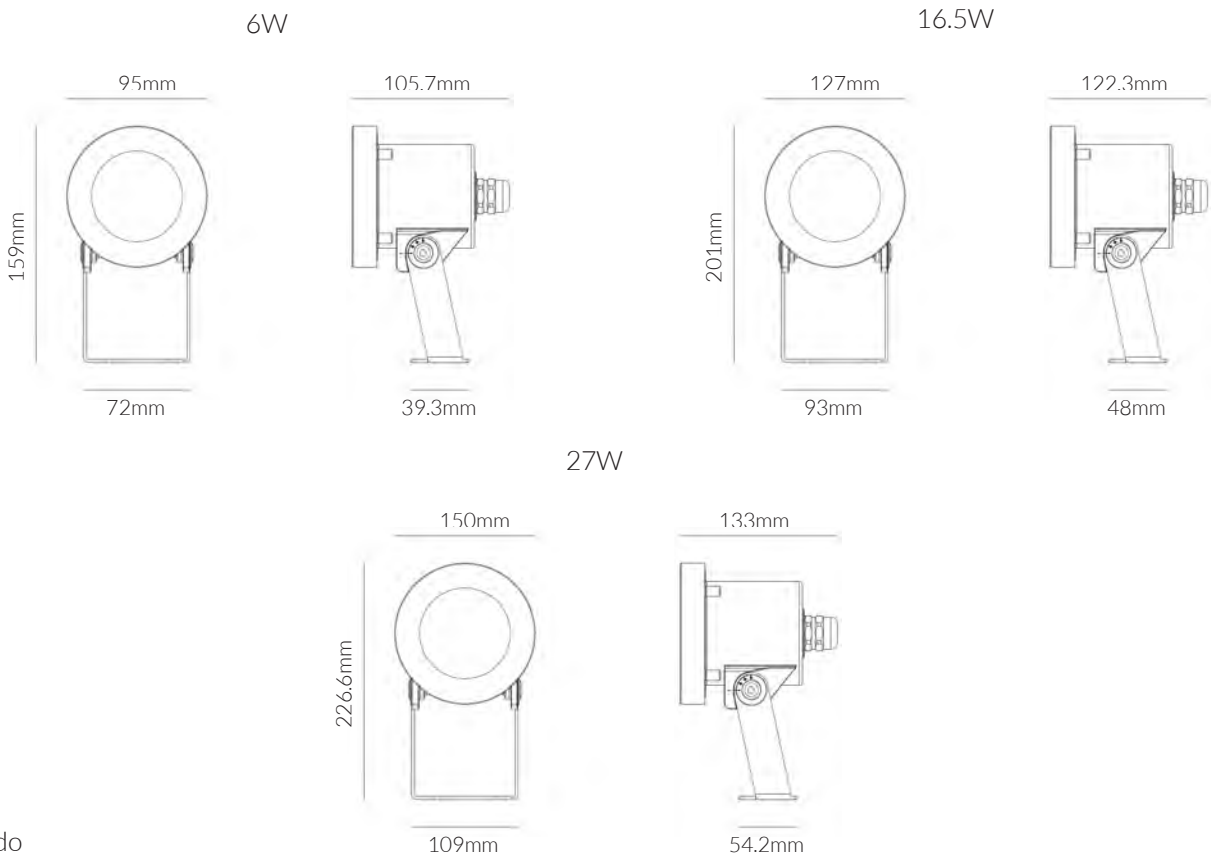

MODO



Built-in Radiator

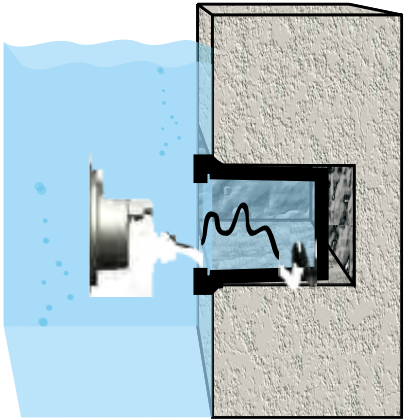

- Water must be allowed to go inside and outside sleeve freely without leaking to the other side.
- Warning : Must be installed under the water to prevent the light from being burnt off because of over-heating.

ELLO

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Hard chrome-plated stainless steel #316
Finish: Chrome
Gasket: : Silicone gasket
Cable Gland: PG-11 copper with nickel-coated
Excellent heat conductivity aluminum.coefficient of heatConductivity≥2.0w/mk
Automatic Shutdown at 75°C
Temperature of water between -20°C~+50°C less than 1 meter depth
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Pools, Fountains



Product Options:

Wattage: 16W/20W
CCT: 3000K - 6000K
Voltage: DC12V
Beam Angle: 20° / 25° / 35° / 45°
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ello	16516	8W	3000K	720lm	371mA	30°	D: 135	-
	16199	8W	RGB	640lm	R: 200mA, G: 215mA, B: 215mA	30°	D: 135	-

DC
24V

IP
68

30°



CRI>90

SDCM <3

Class II

IK08



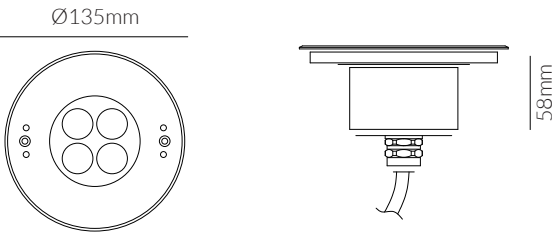

Mounting Sleeve 058

Product Specifications:

Lamp Type: CREE LED
Operating Temp.: -20°C ~ +50°C
Material: Hard chrome-plated stainless steel #316
Finish: Stainless Steel
Excellent heat conductivity aluminum.coefficient of heatConductivity≥2.0w/mk
Temperature of water between -20°C~+50°C less than 1 meter depth
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Pools, Fountains



Product Options:

Beam Angle: 12° / 40° / 60°
CCT: 4000K,6000K, RGB
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM
Accessory: Honeycomb louver/Half shading

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ela	19091	2W	3000K	200lm	60mA	25°	38 x 75mm	-

DC
24V

IP
68


CRI>90

SDCM <3

Class III

IK06



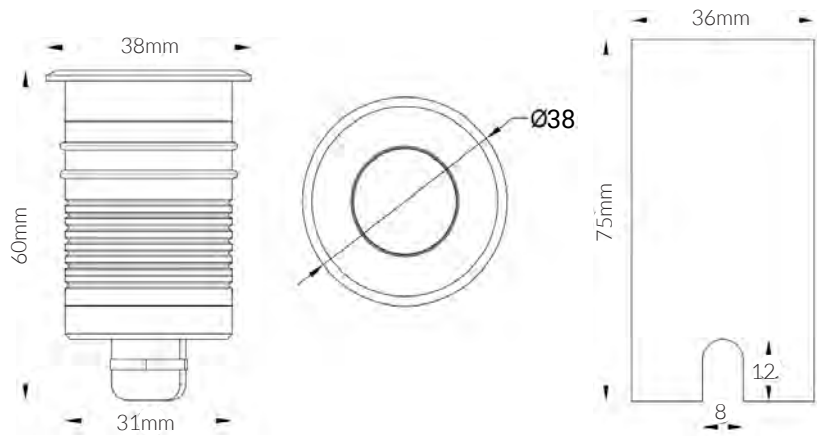

ELA



Product Specifications:

Lamp Type: EPISTAR LED
LED Qty: 252 Pcs
Operating Temp.: -20°C ~ +50°C
Energy Class: A
Material: Glass body
Finish: Chrome
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Outdoor, Pool, Fountains




Product Options:

Wattage: 24W / 35W
CCT: 3000K - 6000K, RGB
Voltage: AC24V, DC12V, DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Zona (Par56 LED Lamp)	17311	18W	3000K	1,800lm	-	120°	Ø178x108	-

AC 12V IP 68 CRI>80

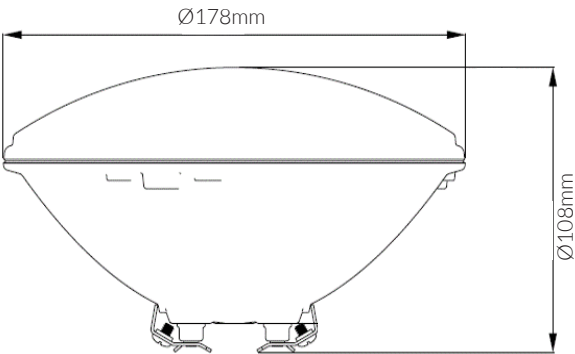

Product Specifications:

Lamp Type: EPISTAR LED
LED Qty: 144 Pcs
Operating Temp.: -20°C ~ +50°C
Energy Class: A
Material: #304 Stainless Steel Face Ring+Plastic Body
Finish: White
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Outdoor, Pool, Fountains




Product Options:

Wattage: 18W / 24W / 35W / 54W
CCT: 3000K - 6000K, RGB
Voltage: AC24V, DC12V, DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Mizar (Par56 LED Lamp)	17312	30W	3000K	2,700lm	-	-	Ø280x160	-

AC 12V IP 68 CRI>80

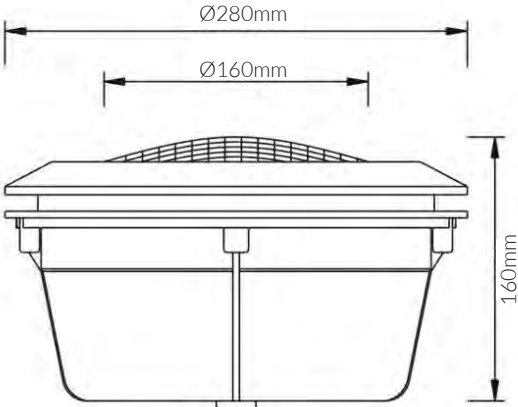

Product Specifications:

Lamp Type: EPISTAR LED
LED Qty: 252 Pcs
Operating Temp.: -20°C ~ +50°C
Material: Plastic Body
Finish: White
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Outdoor, Pool, Fountains




Product Options:

Wattage: 24W / 35W
CCT: 3000K - 6000K, RGB
Voltage: AC24V, DC12V, DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Franco	17313	18W	3000K	1,800lm	-	120°	Ø178x108	-

AC12VIP68CRI>80



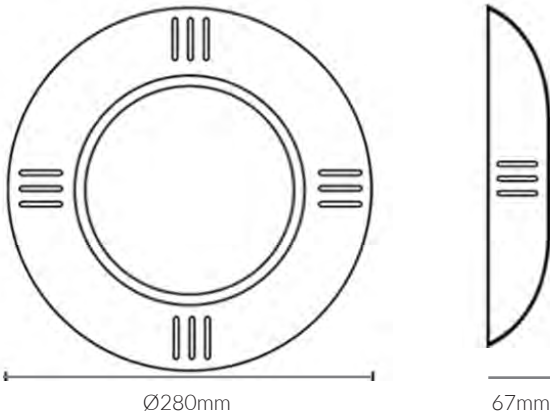

Product Specifications:

Lamp Type: EPISTAR LED
LED Qty: 108 Pcs
Operating Temp.: -20°C ~ +50°C
Material: Plastic Body
Finish: White
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Outdoor, Pool, Fountains




Product Options:

Wattage: 18W / 24W / 35W / 54W
CCT: 3000K - 6000K, RGB
Voltage: AC24V, DC12V, DC24V

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Mazimo	17314	8W	RGB	720lm	-	-	Ø248x57	-

AC12VIP68CRI>80



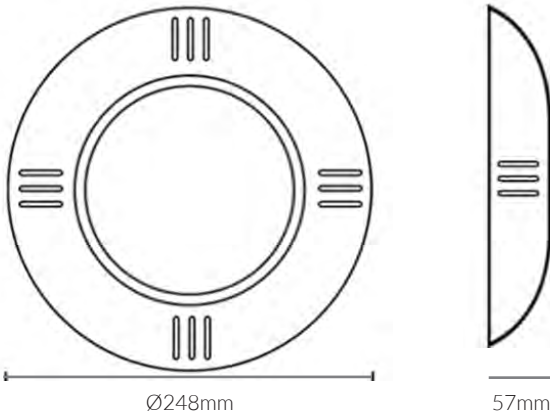



WALL WASHER

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium Body+Stainless Steel 316+Tempered Glass
Gasket: Glass and housing are silicone sealed
Finish: Chrome
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality





Product Options:

Beam Angle: 20° / 25° / 30° / 45°
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Luvio	15192	12x1.5W	3000K	1,620lm	910mA	35°	L: 549	-
	15969	12x1.5W	4000K	1,710lm	910mA	35°	L: 549	-
	15970	12x1.5W	6000K	1,800lm	910mA	35°	L: 549	-
(DALI)	15193	24x1.5W	3000K	3,240lm	1826mA	35°	L: 1025	-
	16831	24x1.5W	4000K	3,420lm	1826mA	12x50°	L: 1025	-
	16373	24x1.5W	6000K	3,600lm	1826mA	35°	L: 1025	-

DC 24V IP 67 CRI>80

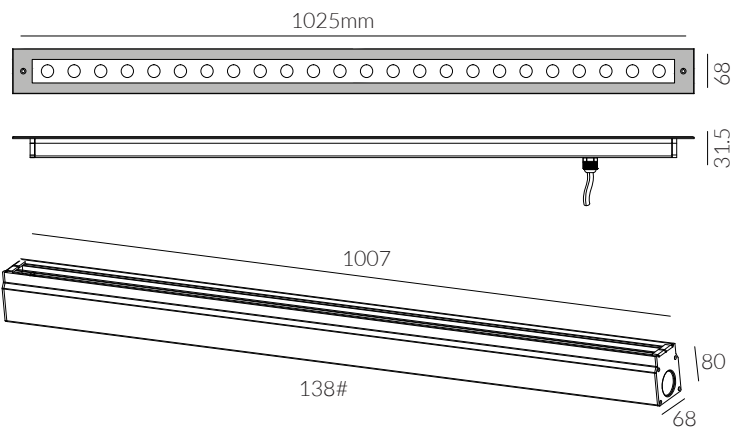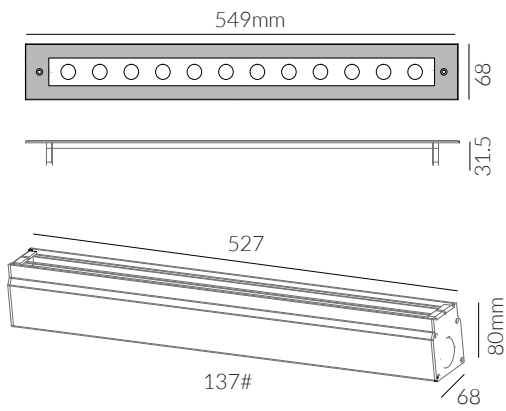



Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium Body+Stainless Steel 316+Tempered Glass
Gasket: Glass and housing are silicone sealed
Finish: Chrome
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality





Product Options:

Wattage: 6x1.0W
Voltage: DC24V
Beam Angle: 15° / 20° / 50°
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Verso	15194	12x1.0W	3000K	1,080lm	65mA	30°	L: 510	-
	15976	12x1.0W	4000K	1,140lm	65mA	30°	L: 510	-
	15977	12x1.0W	6000K	1,200lm	65mA	30°	L: 510	-
	15195	24x1.0W	3000K	2,160lm	163mA	30°	L: 985	-
	15978	24x1.0W	4000K	2,280lm	163mA	30°	L: 985	-
	15979	24x1.0W	6000K	2,400lm	163mA	30°	L: 985	-

AC220-240V IP 66  CRI>80

 SDCM <5  Class I  IK05  CE

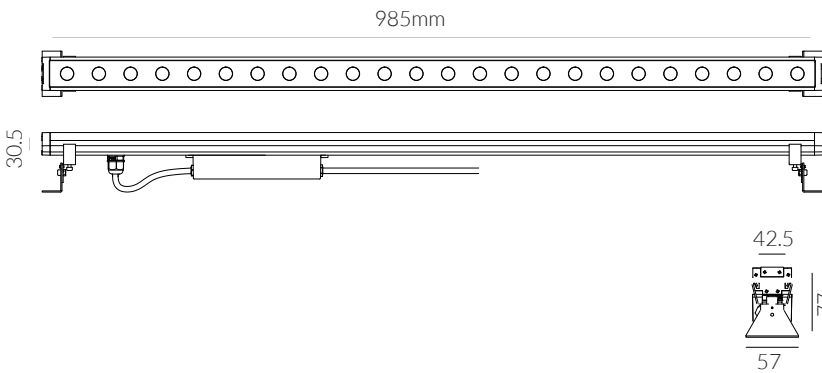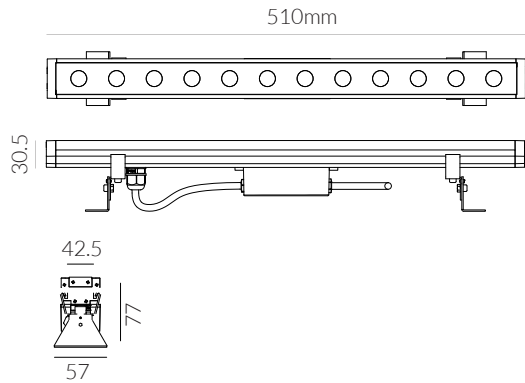

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum
Finish: Silver
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 48W/60W
CCT: 4000K-6000K, RGB
Beam Angle: 10x60° / 15x18°
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / DMX512

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Selina	19489	18W	3000K	1,620lm	-	15x45°	L: 504	-
	19490	36W	3000K	3,240lm	-	15x45°	L: 1000	-

AC220-240V

IP 67

15x45°

CRI>80

SDCM <3


Class I

IK08


Flicker Free



18W

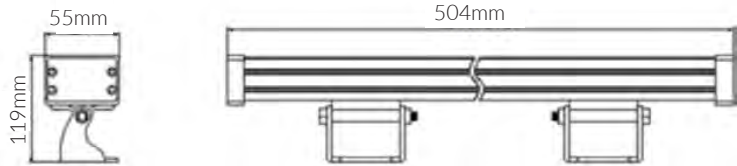

36W

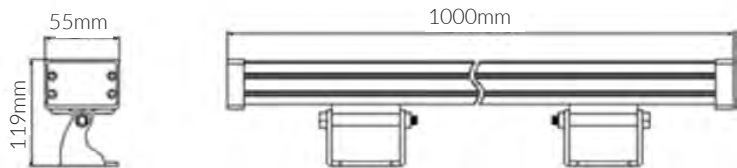

SELINA

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminum
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 24W
CCT: 4000K-6000K, RGB
Beam Angle: 10°/15°/45°/60°/20°45°/10x60°
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / DMX512

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Minas	19862	18W	3000K	1,620lm	-	30°	L: 510	-
	19861	36W	3000K	3,240lm	-	30°	L: 1000	-

AC220-240V

IP 66



CRI>80












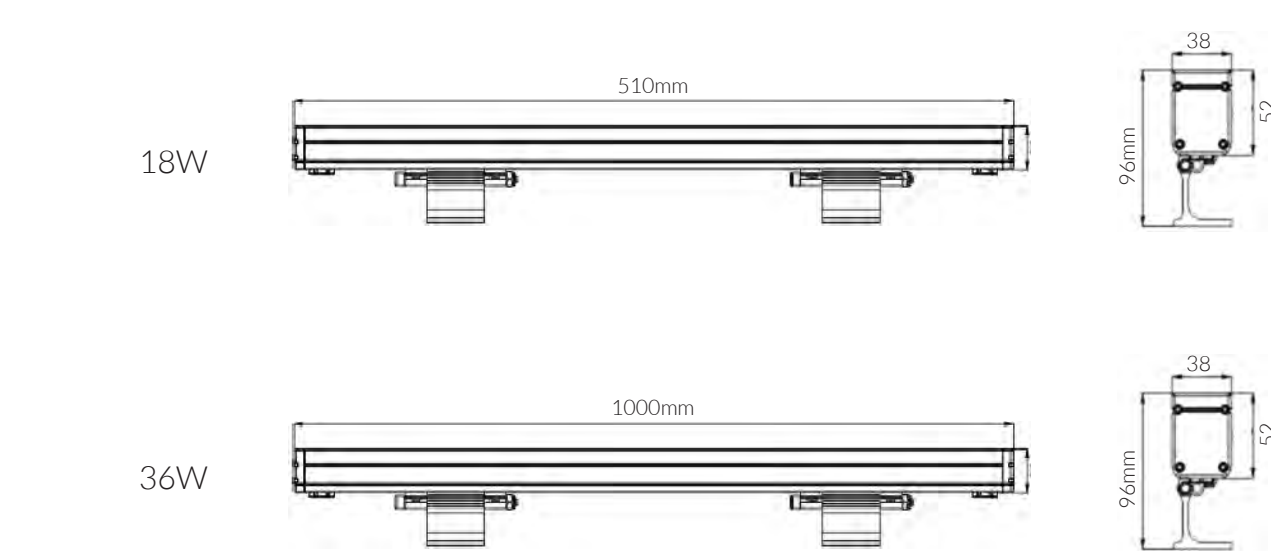

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium
Finish: White
Lifespan: 50,000 Hrs
Warranty: 3 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 18W/36W/48W
CCT: 4000K-6000K, RGB
Beam Angle: 10x60°/15x45°
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Agora	19250	15W	3000K	1,350lm	-	15x18°	L:256	-
	19249	30W	3000K	2,700lm	-	15x18°	L:504	-
	19248	60W	3000K	5,400lm	-	15x18°	L:1000	-
	19233	72W	3000K	6,480lm	-	15x18°	L:1000	-

AC220-240V

IP 67



CRI>80












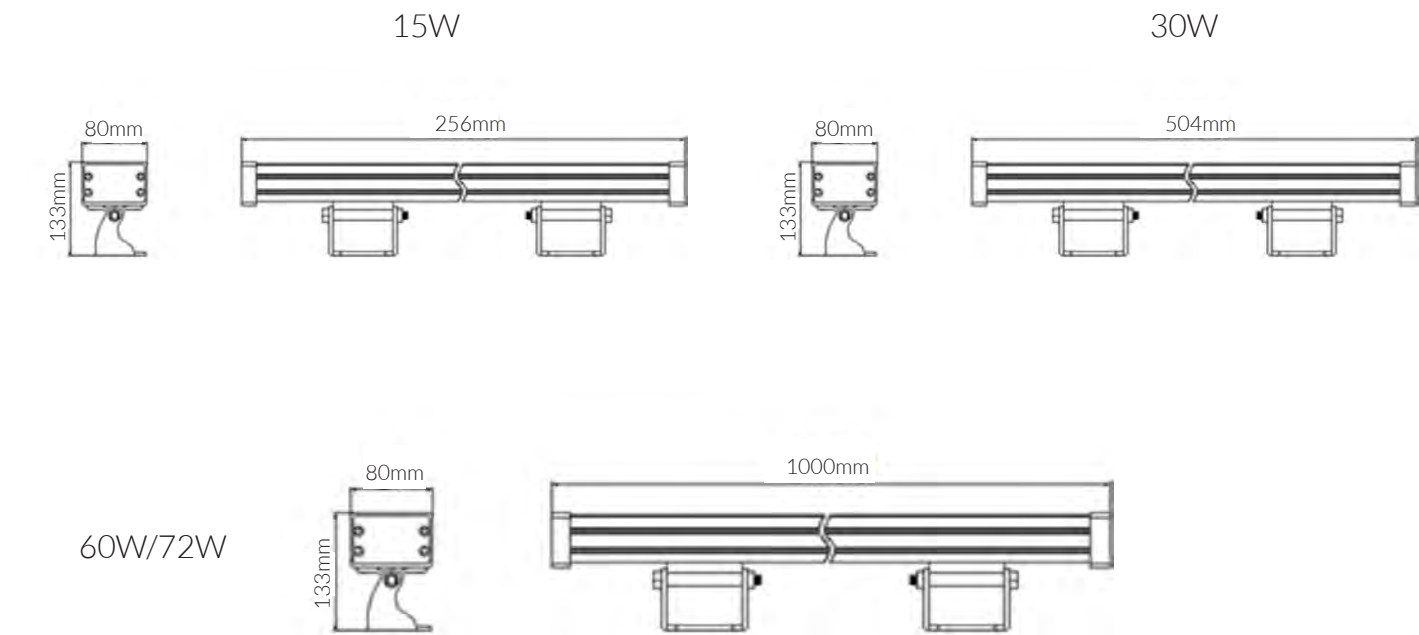



Product Specifications:

Lamp Type: LED
Operating Temp.: -20°C ~ +50°C
Material: Silicone Body + PMMA Lens
Finish: White
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality




Product Options:

CCT: 4000K-6000K, RGB
Beam Angle: 10°/15°/25°/30°/40°/50°/25x50°
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / DMX512

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Elisa	18903	25W/Mtr	3000K	2,500lm	1040mA	45x30°	L: 1000	-
	18904	25W/Mtr	4000K	2,625lm	1040mA	45x30°	L: 1000	-

DC 24V IP 67  CRI>80

 SDCM <3  Class III  IK07 



L: 1000mm (customisable)





JUNO

Wall washer strip

SYV | Outdoor Wall Washer

Product Specifications:


Lamp Type: PHILIPS LED
Operating Temp.: -25°C ~ +55°C
Humidity: 0-95% non condensing
Material: PU + PMMA Lens
Finish: White
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality



Product Options:

Wattage: 70W/140W
CCT: 3000K-6500K
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI

				SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)		
Juno				19422	12W/mtr	4000K	1440lm	-	30°	L:1000 12x8mm	-		
DC 24V	IP 67		CRI>80										

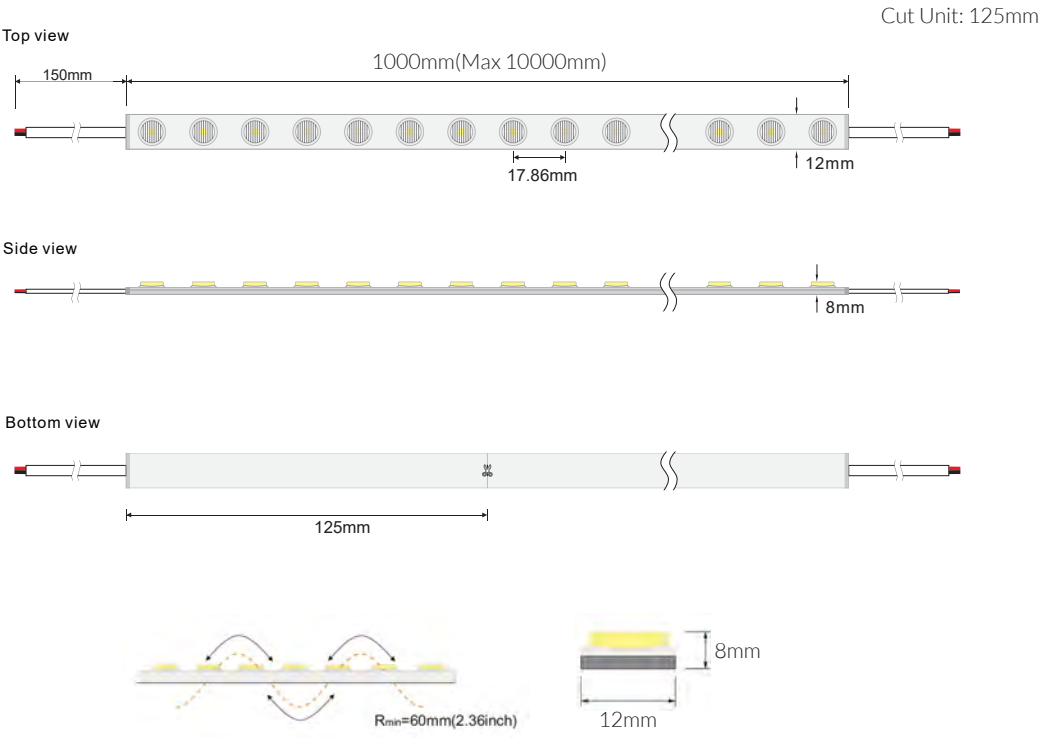

Product Specifications:


Lamp Type: CREE LED
LED Qty: 6 LEDs/set (max 24Leds)
Operating Temp.: -40°C ~ +55°C
Material: PC Body
Finish: Black
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Commercial, Retail, Residential, Hospitality




Product Options:


CCT: 4000K-6000K,
Beam Angle: 30°/45°
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / DMX512

				SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Gina				19333	1W/Pc	3000K	2,500lm	1040mA	15°	Customisable Length upto 1 Mtr	-
DC 24V	IP 68		CRI>80					 SDCM <3  Class III  IK03 			

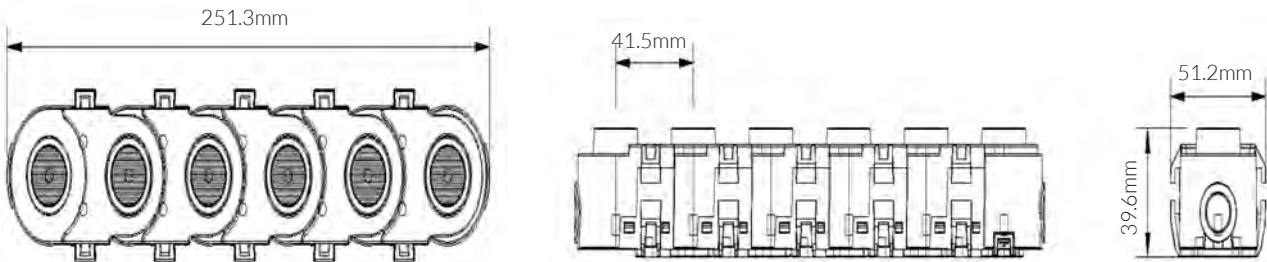

Customisable Length upto 1 Mtr (24 Leds/set)

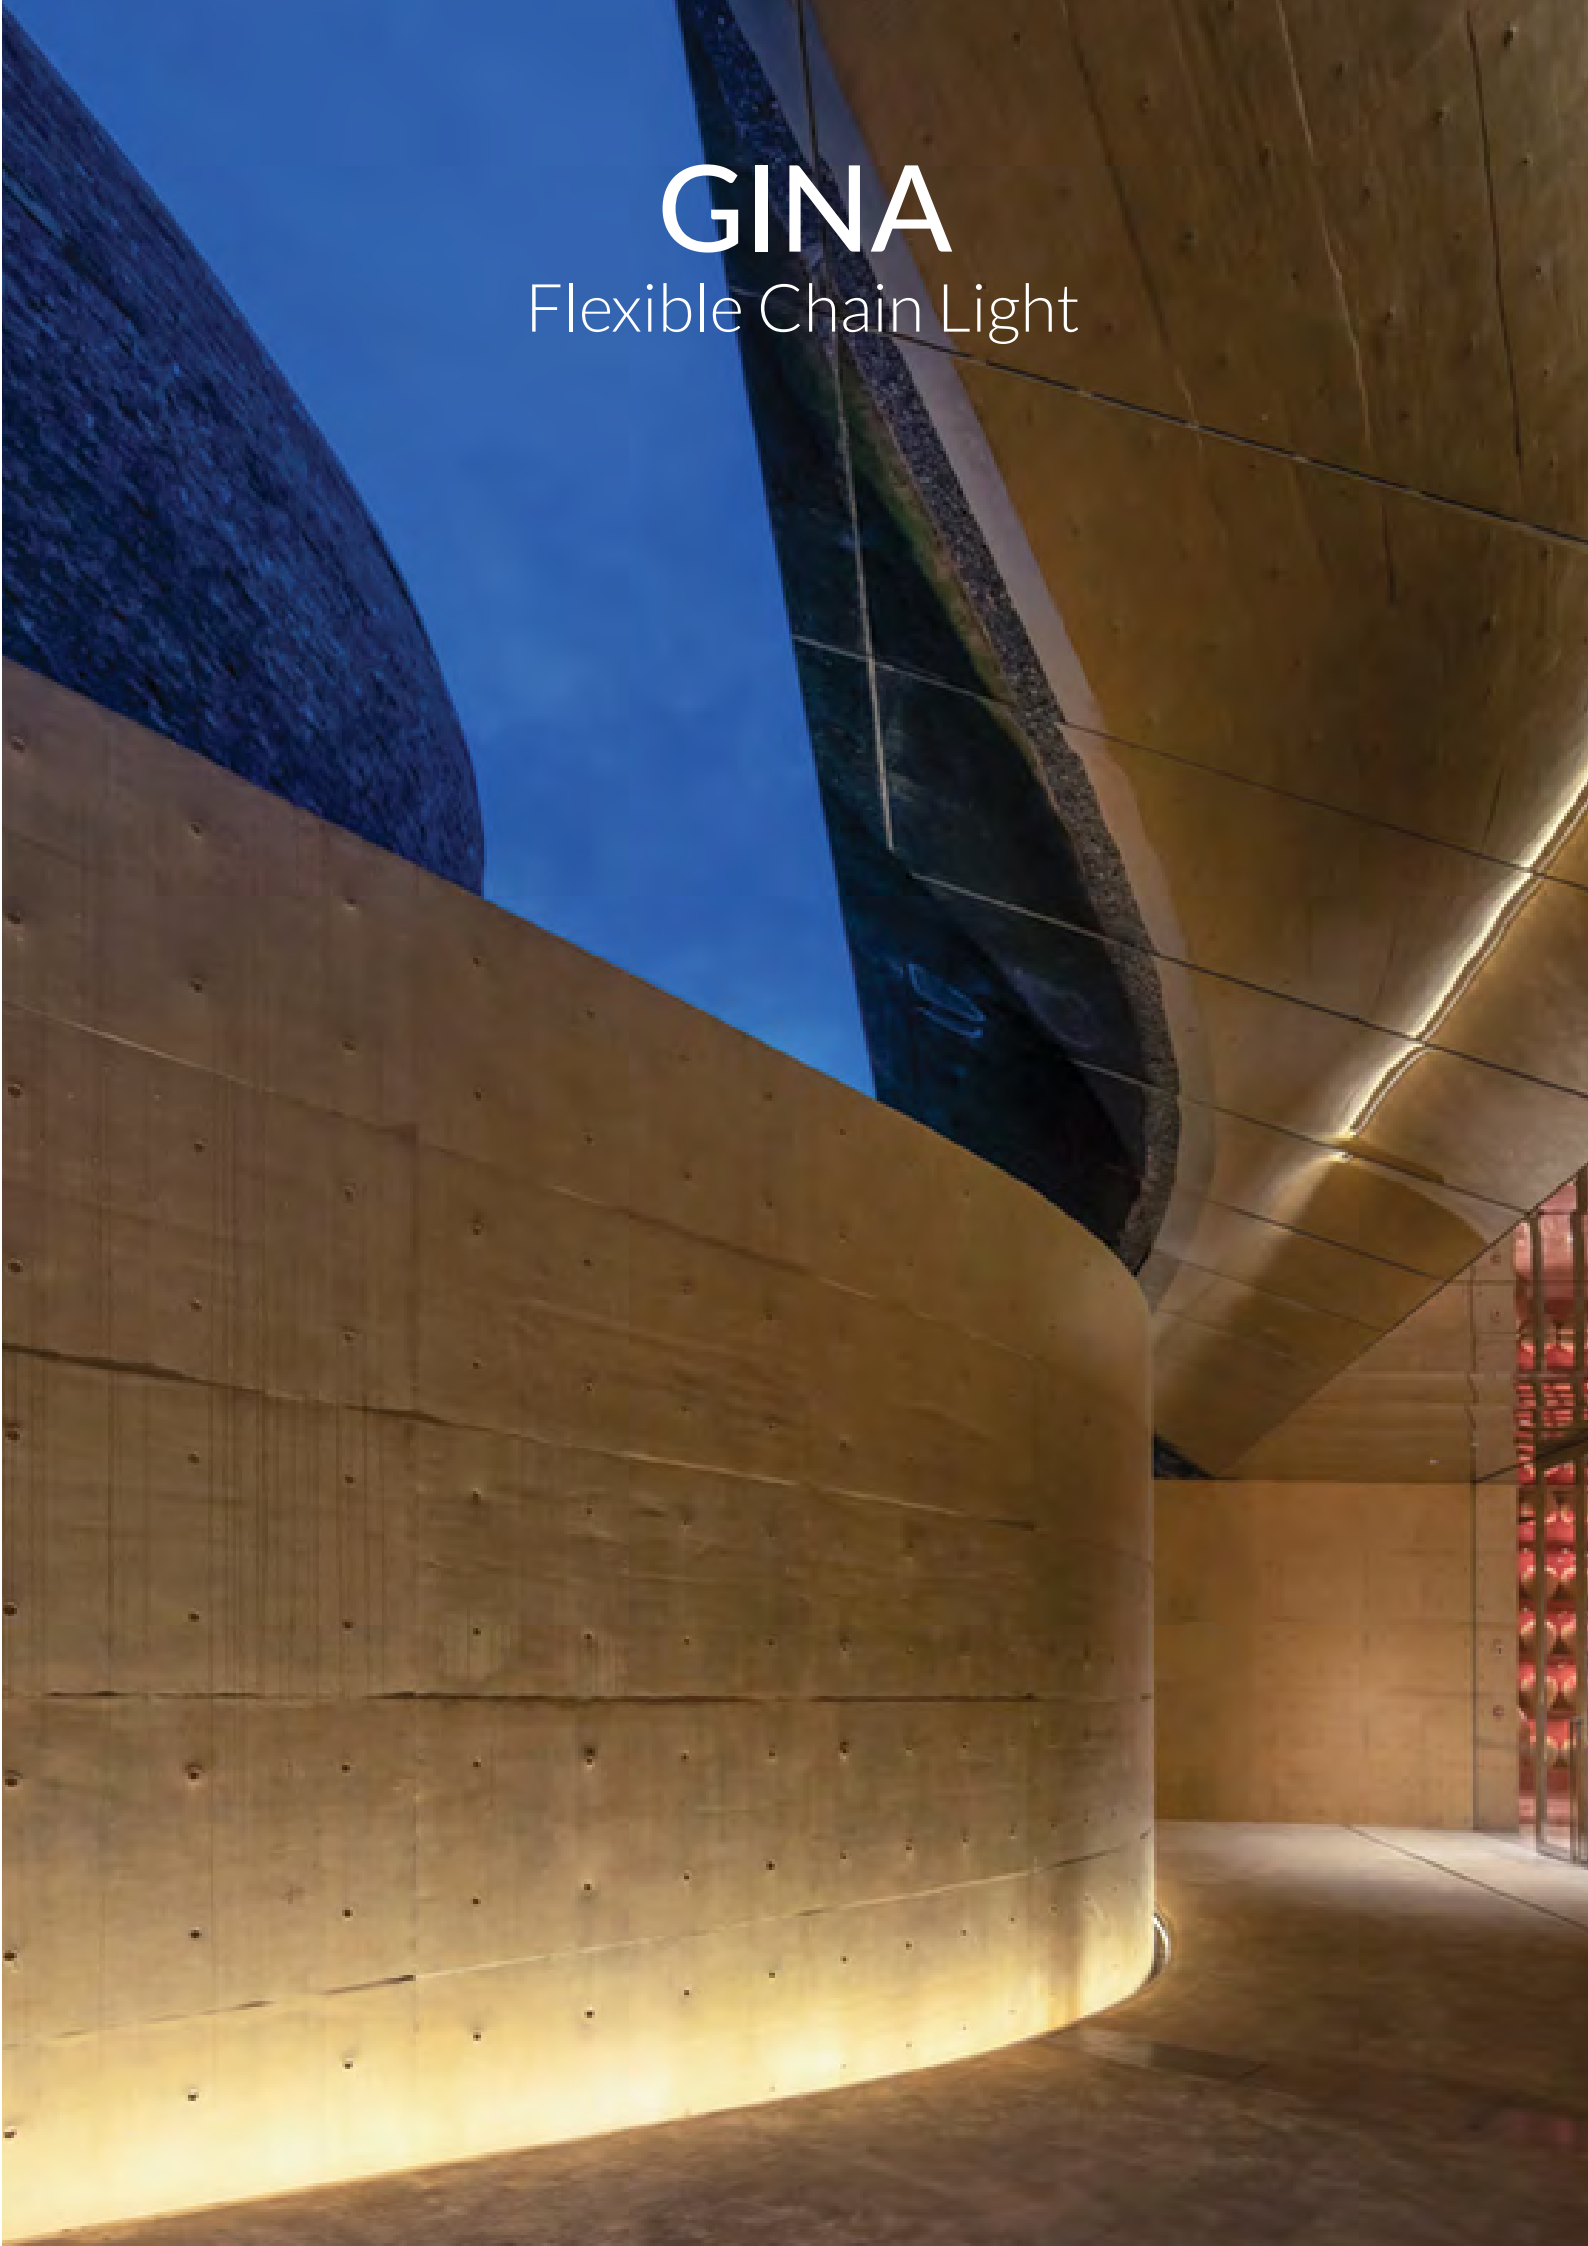

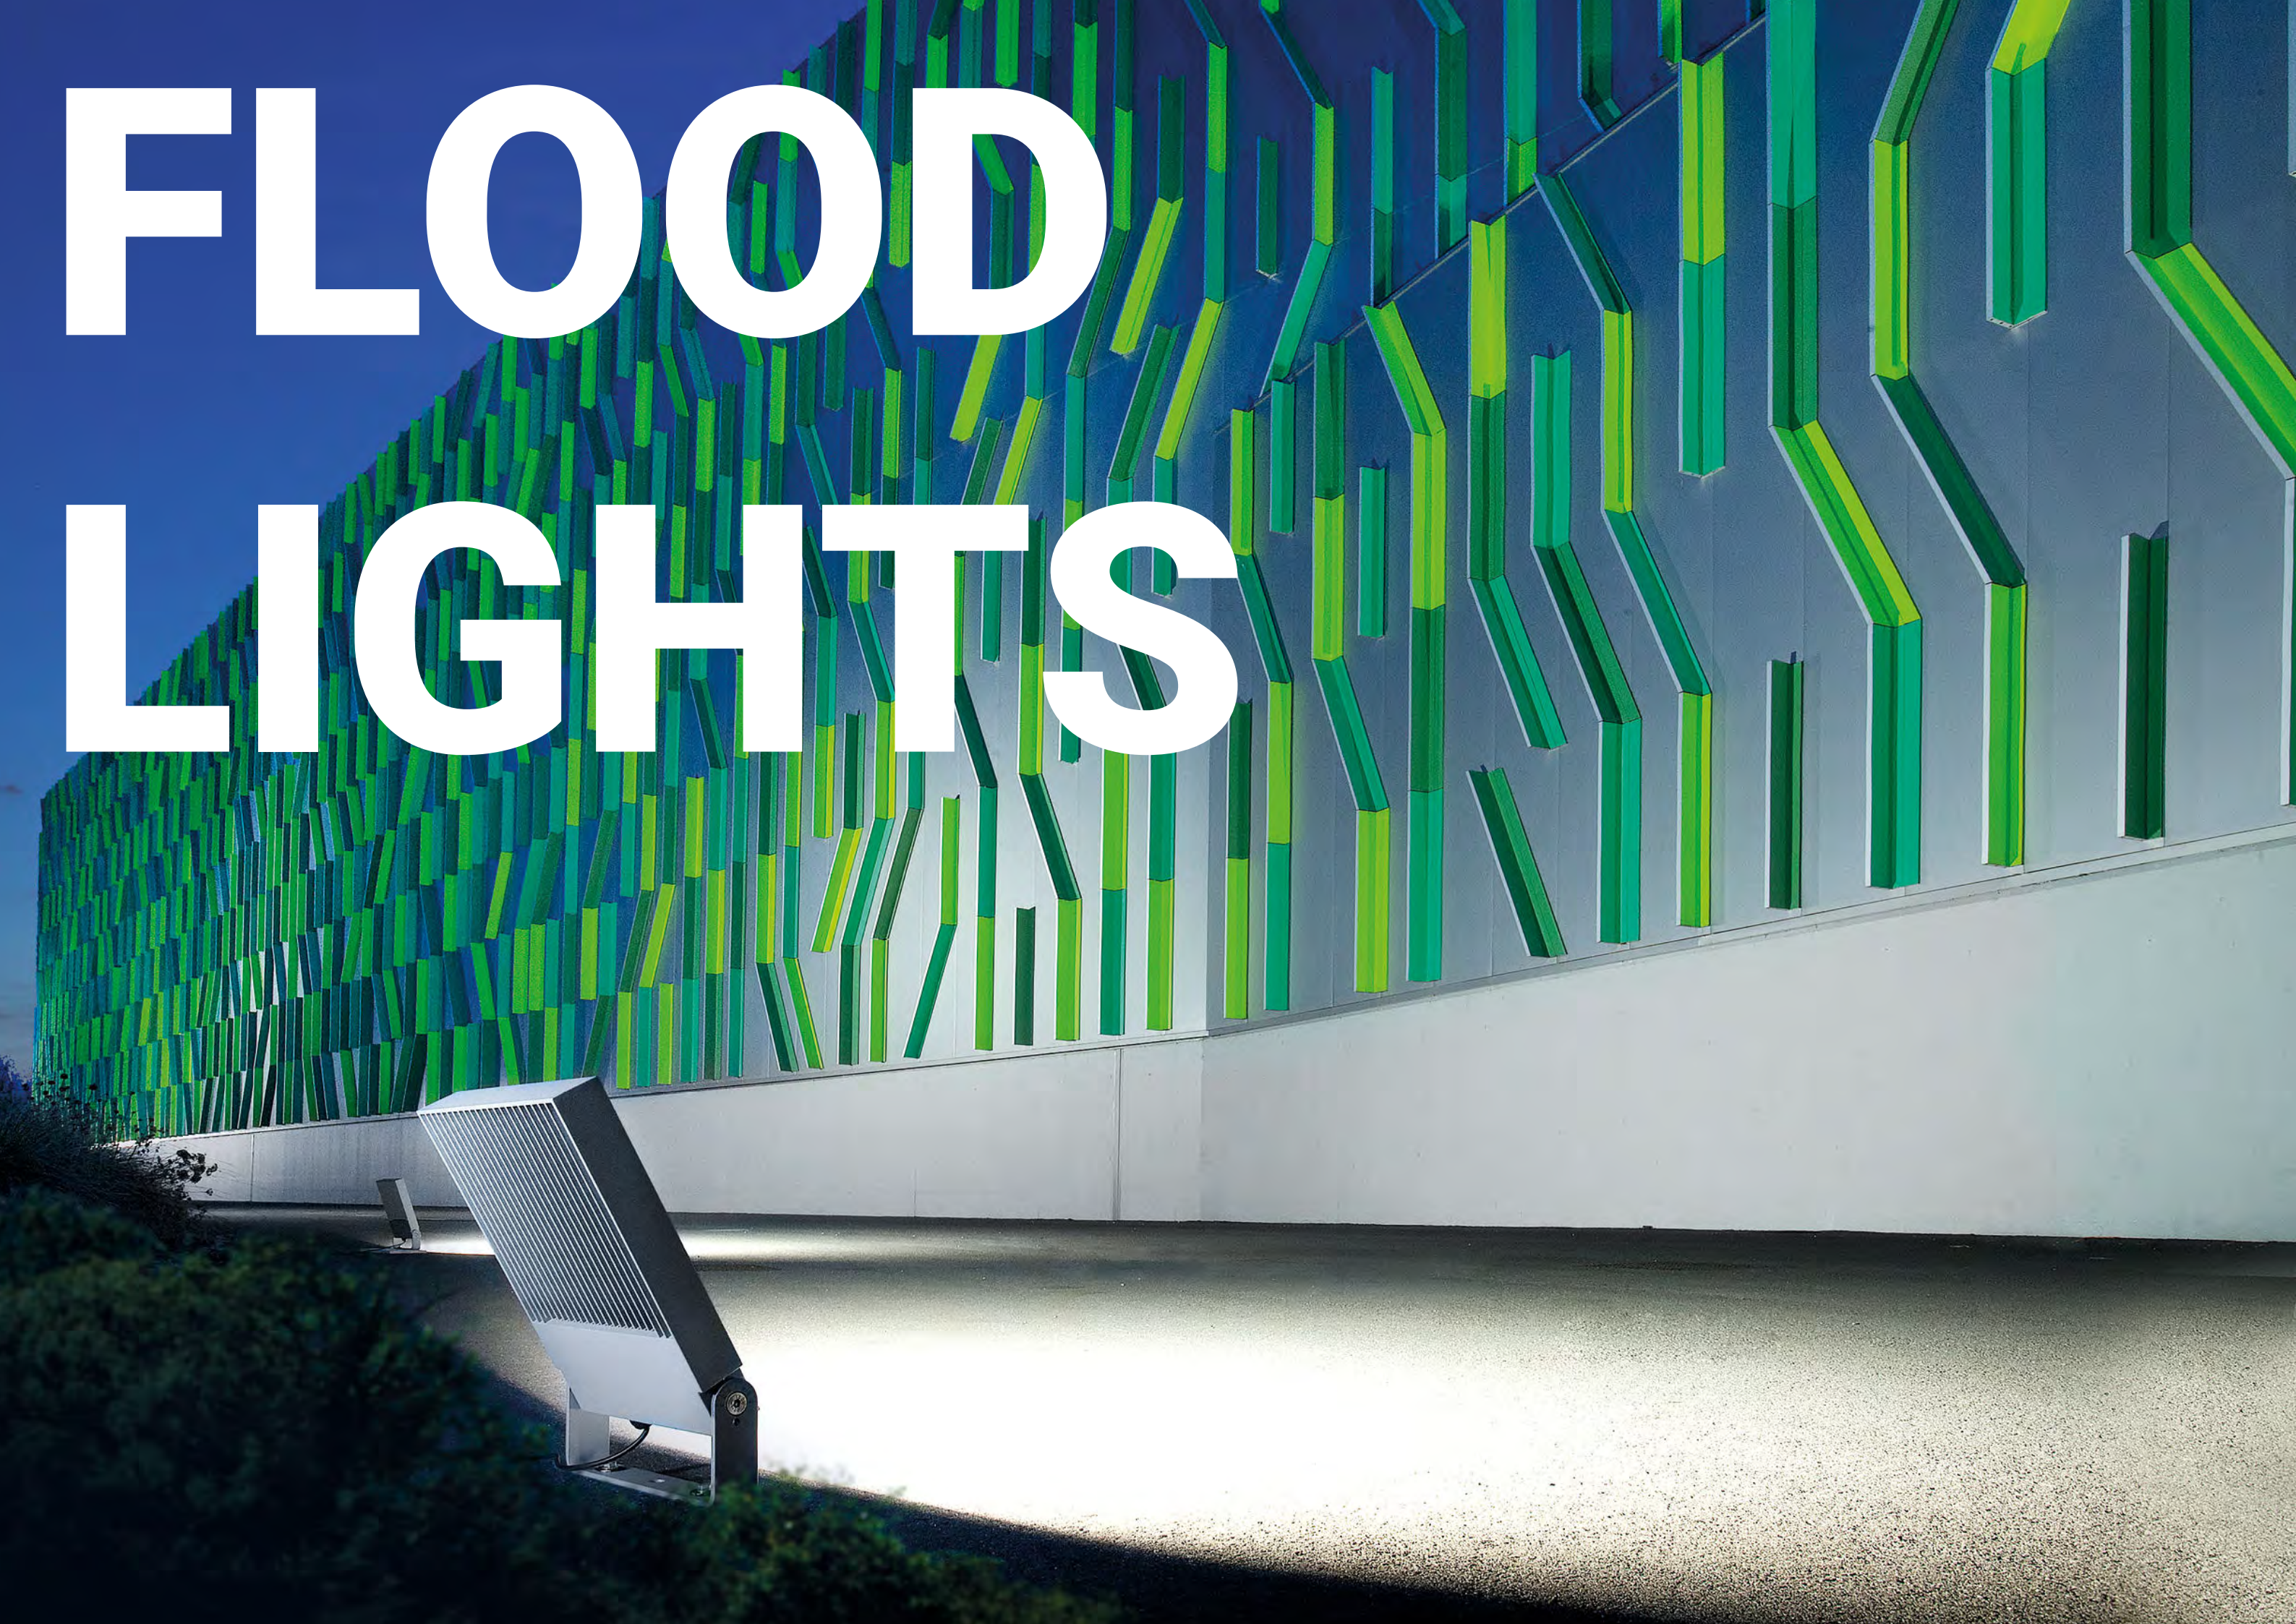

FLOOD LIGHTS



EWO

CCT & Wattage Changeable

SYV | Outdoor Flood Light

Product Specifications:

Lamp Type: LUMI LED's
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium body
Lens: Tempered & Frosted glass
Finish: Matte Black
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



SKU 18450/18451



SKU 18408/18409

Product Options:


Control: Switchable / TRIAC / 0-10V / 1-10V / DALI
Optional: PIR Sensor

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Ewo (CCT & Wattage Changeable)	18408	80W/100W/ 150W	3000K/4000K/ 5000K	140lm/W	-	120°	338.5x80x323	-
	18409	150W/180W/ 200W	3000K/4000K/ 5000K	140lm/W	-	120°	338.5x80x323	-
	18450	50W	3000K	6,500lm	-	120°	228x60x203	-
	18451	50W	6000K	7,000lm	-	120°	228x60x203	-


AC220-240V IP 66  CRI>70 PF>0.9

 SDCM <5  Class I  IK08 

SKU 18408/18409

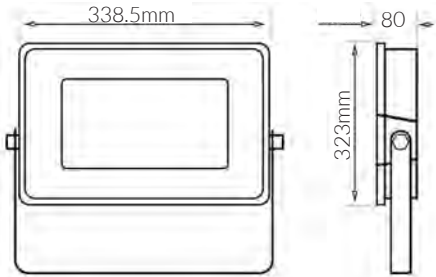

SKU 18450/18451

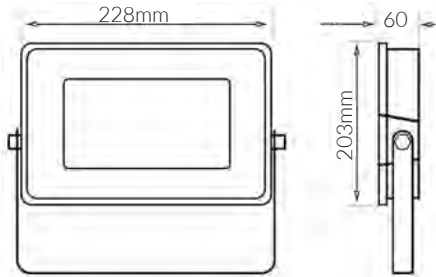

PRODUCT FEATURES & BENEFITS



Multi-CCT & Multi-Wattage Switchable
80W-100W-150W
3000K-4000K-5000K



Slim & Sturdy One-piece
Die Cast Aluminum Housing




Integrated Visor Reduces
Observable Glare



High Efficacy Up to 160LPW



High-reflectance white reflector
maximizes output

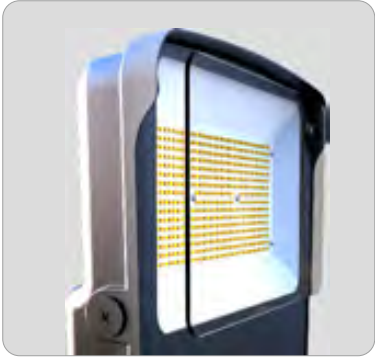

Tempered glass lens won't yellow



Photocell



Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium body
Lens: Tempered glass
Finish: Black powder Coated
Lifespan: 100,000 Hrs
Warranty: 6 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



Product Options:

Wattage: 400W / 1000W / 1250W
CCT: 3000K - 6000K
Beam Angle: 20°x20° / 30°x30° / 45°x45° / 60°x60° / 75°x75°
Control: Switchable / 1-10V / DALI
Control: Occupancy Sensor

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Lunio	15757	600W	3000K	87,000lm	12400mA	8°x8°	533x230x518	-
	16018	800W	3000K	120,000lm	16800mA	10°x10°	533x230x518	-

AC220-240V

IP66

8x8°

10x10°

CRI>70


PF>0.9

SDCM <5

Class I

IK07

CE

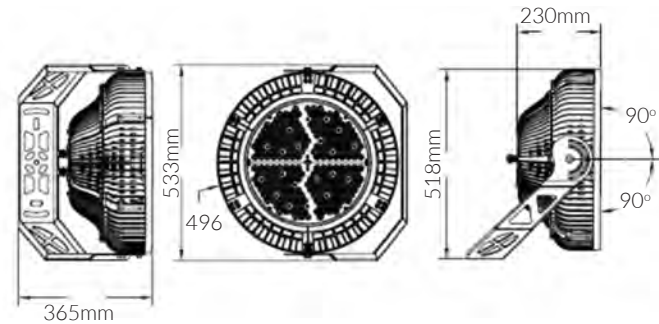

Product Specifications:

Lamp Type: PHILIPS LUMI LED's
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium body
Finish: Black
Lifespan: 100,000 Hrs
Warranty: 5 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



Product Options:

Wattage: 300W / 500W / 750W / 1000W
CCT: 3000K - 6000K
Beam Angle: 30°/ 60°/ 90°
Control: Switchable / 1-10V / DALI / 0-10V / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Cedro	17116	400W	4000K	74,800lm	-	15°	420x448.7	-

AC220-240V

IP66

15°

CRI>70

PF>0.9


3.75KV


SDCM <5

Class I

IK08

CE

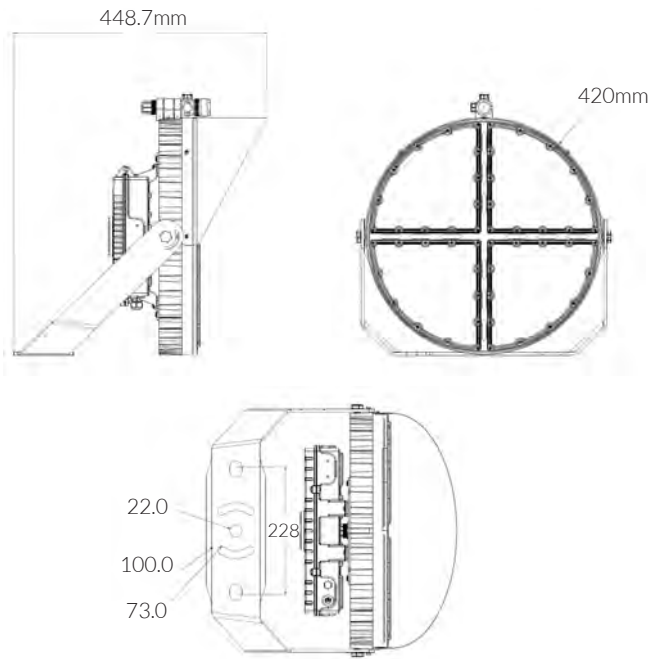

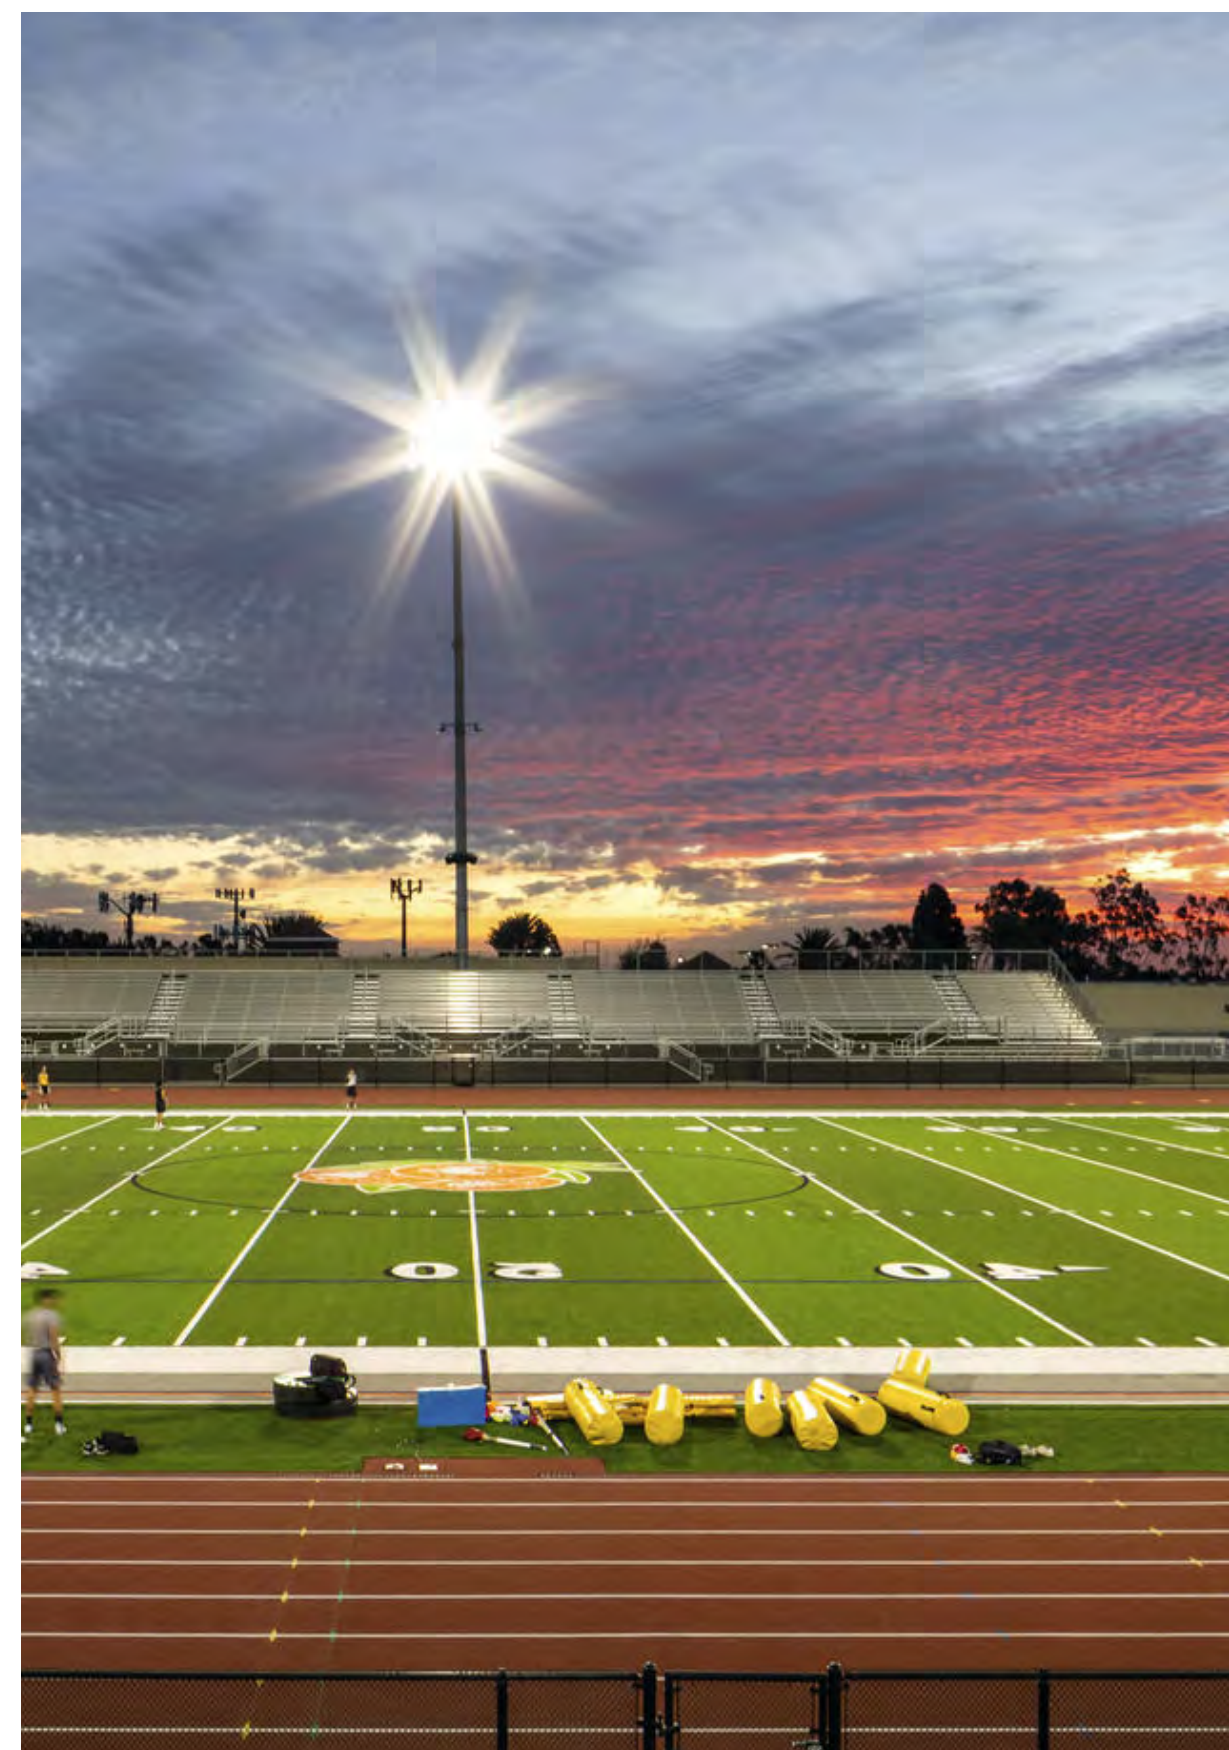



Product Specifications:

Lamp Type: LUMI LED's
Driver: Meanwell Driver
Operating Temp.: -20°C ~ +50°C
Alignment: 0° ~ 270°
Material: Die cast aluminium body,Zinc Galvanised Steel
Optical Cover: Polycarbonate
Finish: Black
Lifespan: 100,000 Hrs
Warranty: 6 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



Product Options:

Wattage: 50W/75W/300W/400W/800W
CCT: 3000K - 6000K
Beam Angle: 30x30°/60x60°/90x90°/Type I (30x100°)
Control: Switchable / 1-10V / DALI / TRIAC

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Pandora	15592	35W	5000K	4,550lm	72mA	90x90°	326x113x128	-
	15294	100W	5700K	17,500lm	2100mA	60x60°	326x113x128	-
	15593	100W	5000K	14,200lm	2100mA	90x90°	332x113x249	-
	15594	150W	5000K	19,500lm	3100mA	90x90°	332x113x249	-
	15372	200W	5700K	35,800lm	4200mA	60x60°	381x113x249	-
	15595	200W	5000K	26,800lm	900mA	90x90°	332x113x356	-

AC220-240V

IP65

CRI>70

PF>0.9

Class I

Product Specifications:

Lamp Type: PHILIPS LUMI LED's
Driver: MeanWell
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium body+Zinc Galvanized Steel Bracket
Finish: Black
Lifespan: 30,000 Hrs
Warranty: 3 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



Product Options:

Wattage: 50W/75W/100W/150W/300W/400W/500W
CCT: 3000K - 6000K
Beam Angle: 60x60° / 100x100° / 140x140°
Control: Switchable / 1-10V / DALI
Control: Occupancy Sensor

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Spartan	15646	200W	5000K	26,000lm	3125mA	60x60°	310x124x239	-
	15709	600W	5000K	78,000lm	12500mA	60x60°	582x124x359	-
	15726	1000W	5000K	120,000lm	16800mA	30°x30°	681x113x463	-

AC220-240V


IP65

CRI>80


PF>0.9

Class I


SKU 15592/15294

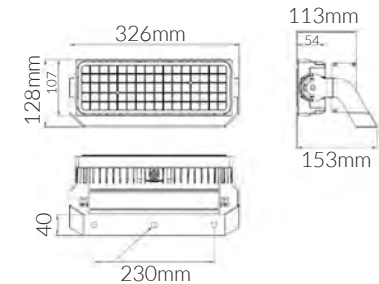


SKU 15593/15594/15372

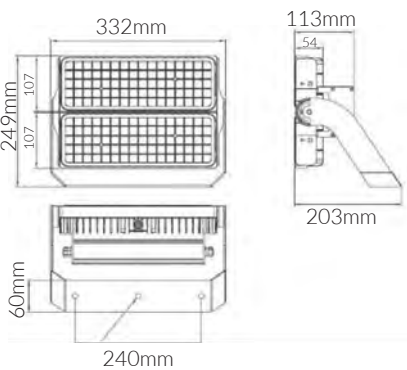


SKU 15595

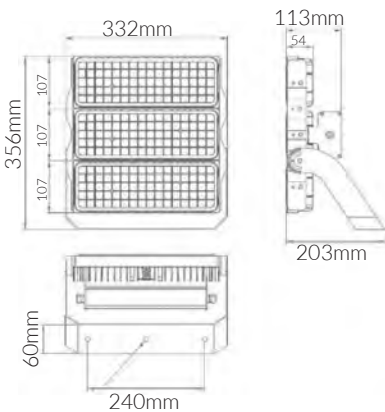


200W

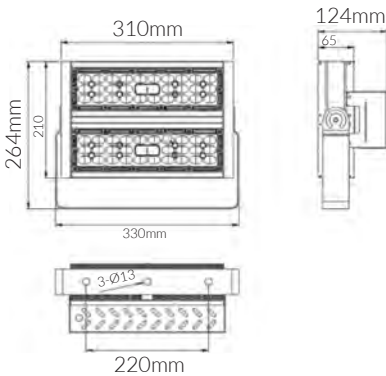


600W

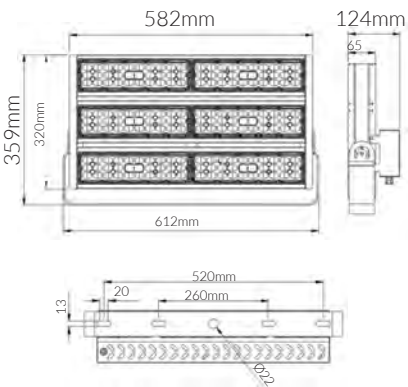

1000W

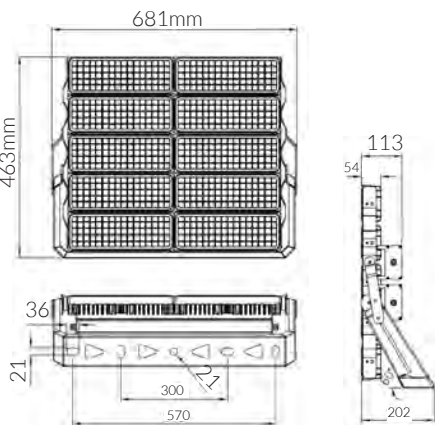

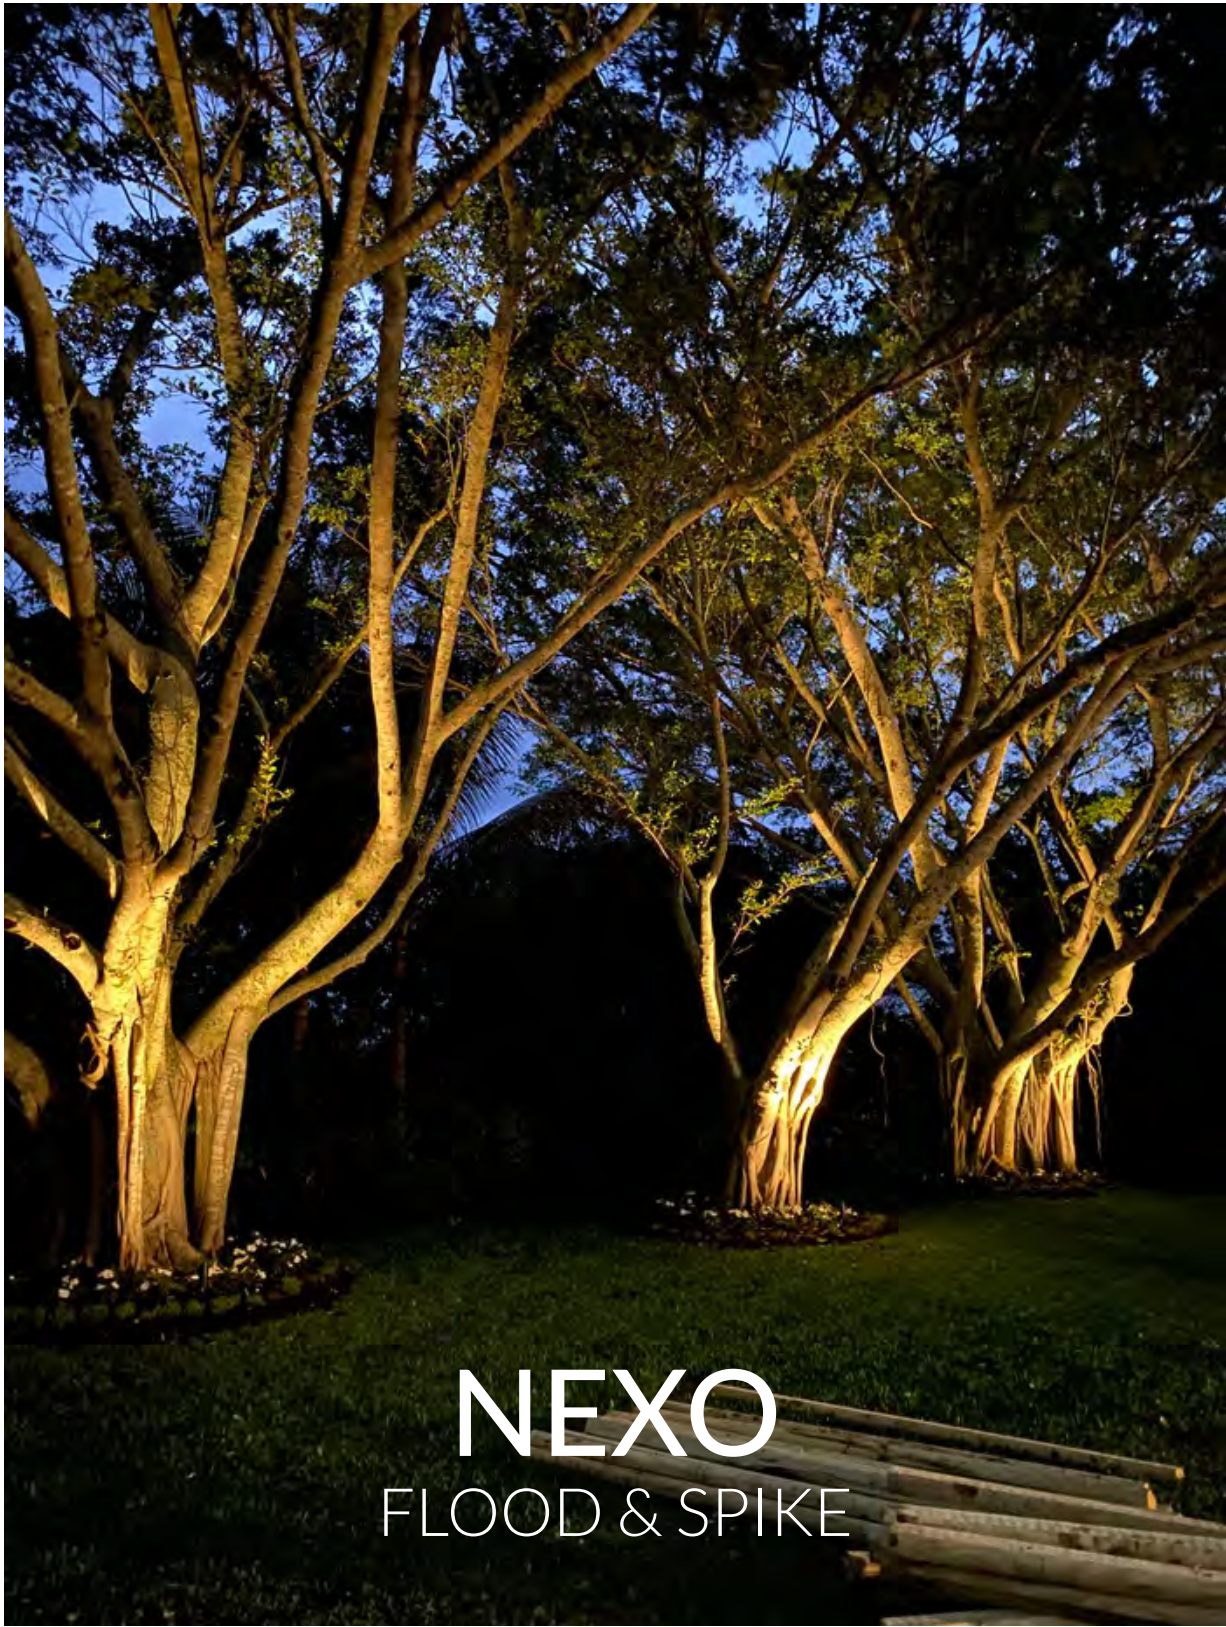

Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium body
Lens: All-in-one optical lens, efficiency ≥85%
Lens Window: Tempered glass. T=4mm
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting





Product Options:

CCT: 3000K - 6000K
Beam Angle: 9°/ 15°/20°/45°/60°
Finish: Silver Grey / Black
Control: Switchable / 1-10V / DALI / TRIAC / PWM

					SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)		
Nexo					17746	12W	3000K	1,080lm	97mA	30°	Ø130x184	-		
AC220-240V	IP 65		CRI>80	PF>0.9							 SDCM <5	 Class I	 IK08	

Optional Accessory: Spike

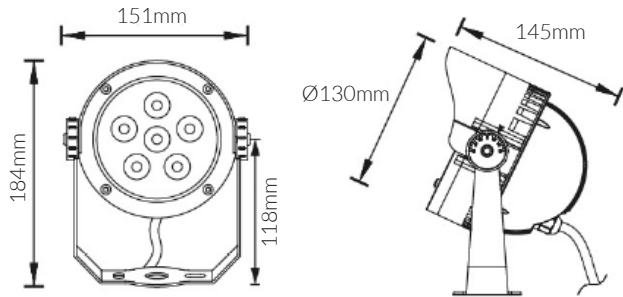



SYV | Outdoor Flood Light

Product Specifications:


Lamp Type: PHILIPS LUXEON LED
Driver: PHILIPS
Operating Temp.: -40°C ~ +50°C
Material: Die cast aluminium body
Finish: Black
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



Product Options:

Wattage: 240W / 360W / 480W / 720W
CCT: 3000K - 6000K
Beam Angle: 45x45° / 90x90°
Control: Switchable / 1-10V / DALI / TRIAC / PWM

					SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)	
Enyo					17221	500W	5000K	62,500lm	670mA	60x60°	595x125x787	-	
AC220-240V	IP 65		CRI>70	PF>0.9						 SDCM <6	 Class I	 IK08	

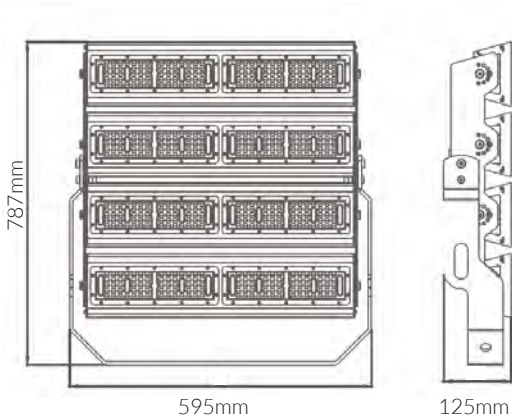

Product Specifications:


Lamp Type: CREE LED
Driver: MeanWell
Operating Temp.: -20°C ~ +50°C
Material: Die cast aluminium body+Tempered Glass
Finish: Dark Grey
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting



Product Options:

CCT: 3000K - 6000K
Control: Switchable / 1-10V / DALI / TRIAC / PWM

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Piatto	16764	150W	BLUE	13,500lm	600mA	90°	595x125x787	-
AC220-240V IP65 60x60° CRI>80 PF>0.8 SDCM <3 Class I IK08 								

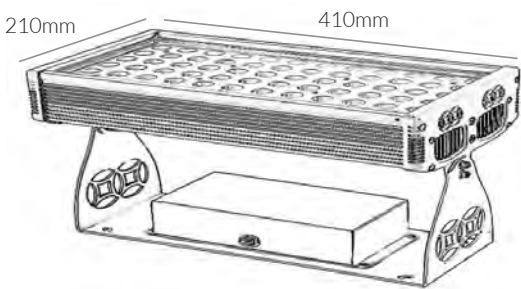



AREA & POST TOP



Product Specifications:

Lamp Type: BRIDGELUX LED
Operating Temp.: -20°C ~ +50°C
Material: Die-cast Aluminum
Gasket: Made of Thermostable silica gel to improve protection class
Fastener: Made of stainless steel with high intensity and corrosion protection
Diffuser: Clear Glass
Finish: Dark Grey UV-proof powder coating
Lifespan: 50,000 Hours
Warranty: 5 Years
Applications: Outdoor, Gardens, Pathways, etc.

Product Options:

CCT: 3000K - 6000K
Control: Switchable / DALI / 1-10V / TRIAC / 0-10V



	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Invitar	15237	30W	3000K	3,300lm	700mA	-	150x2500	-

AC220-240V IP 65  CRI>80 PF>0.9

 SDCM <3  Class I  IK08 



Product Specifications:


Lamp Type: E40
Operating Temp.: -20°C ~ +50°C
Head Material: Extruded Aluminium
Diffuser: Transparent Thermo-polymer stabilised
Finish: UV-proof powder coating in Black
Warranty: 10 Years
Applications: Outdoor, Gardens, Pathways, etc.



Product Options:

Lamp Type: E27

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Mecho	16839	-	-	-	-	-	Ø700x710	-
AC90-260V	IP 65		CRI>70	PF>0.9				

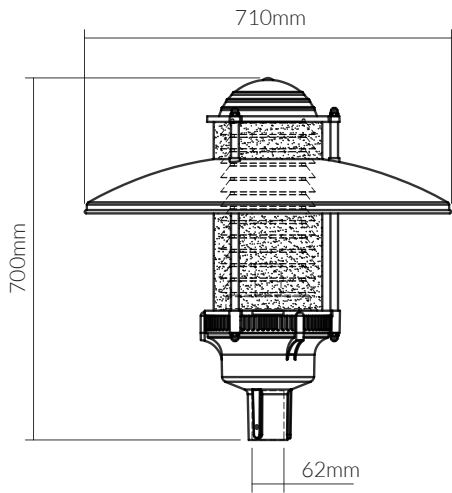

Product Specifications:


Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium Body + Hot-dip galvanized iron pole
Finish: Matt Black UV Proof powder coating
Warranty: 5 Years
Applications: Outdoor, Gardens, Pathways, etc.

Product Options:

CCT: 3000K - 6000K
Control: Switchable / 1-10V / DALI



		SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Alan		19121	45W	3000K	4500lm	-	-	Ø250x H:6000	
AC90-260V	IP 65		CRI>70	PF>0.9					 SDCM <3  Class I  IK08 

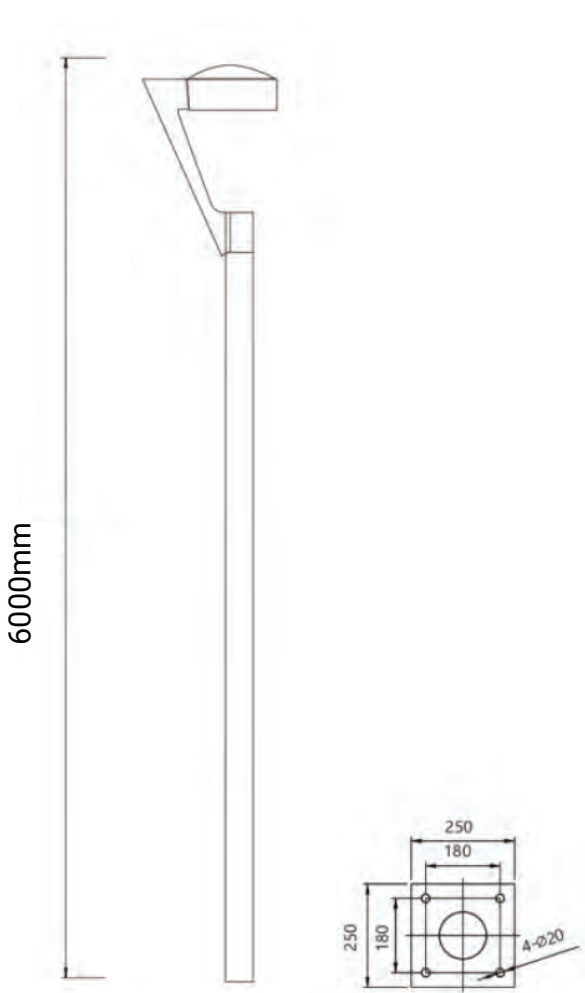

Product Specifications:


Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium Body + Opal PC Difusser + Hot-dip galvanized iron pole
Finish: Matt Black UV Proof powder coating
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting

Product Options:

CCT: 3000K - 6000K
Finish: Dark Grey, Sand Silver, Gray Metal Sand Grain
Control: Switchable / 1-10V / DALI / 0-10V / TRIAC



		SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Britto		19003	50W	4000K	5000lm	-	-	Ø500xH:4500mm	-
AC90-260V	IP 65		CRI>70	PF>0.9					 SDCM <3  Class I  IK08 

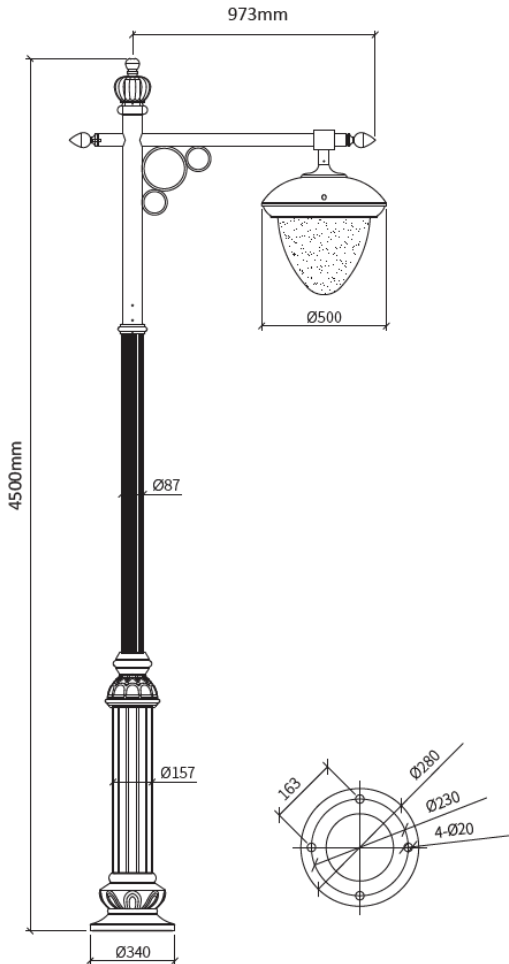


Product Specifications:

Lamp Type: OSRAM LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminium Body + Opal PC Difuser
+ Hot-dip galvanized iron pole
Finish: Matt Black UV Proof powder coating
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Outdoor Parking Lots, Playgrounds, Landscape Lighting

Product Options:

Wattage: 7W, 10W, 12W, 15W, 20W, 30W
CCT: 4000K/6000K
Control: Switchable / 1-10V / DALI

		SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Lucio		19154	35W	3000K	2,975lm	-	360°	Ø560x700	-
AC90-260V	IP 65		CRI>70	PF>0.9	SDCM <3 Class I IK08 				

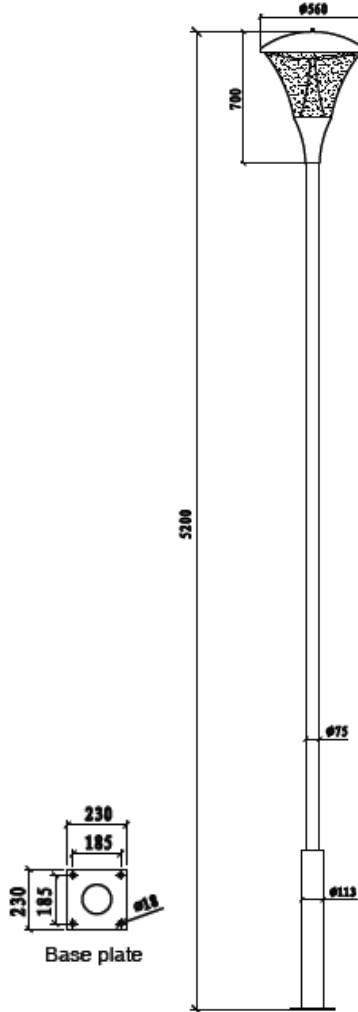



STREET
LIGHT

Product Specifications:

Lamp Type: EPISTAR LED
Operating Temp.: -20°C ~ +50°C
Material: Aluminum Body
Finish: Black
Power Distribution: 2.5KV
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Pools, Fountains












Product Options:

Wattage: 10W/20W/30W/50W
CCT: 3000K - 6000K
Beam Angle: 60°
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM
Accessory: Tripod Stand

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Liceo	16873	80W	5000K	9,600lm	350mA	150°	484x98x209	-
	15935	100W	3000K	12,500lm	350mA	150°	484x98x209	-
	15934	100W	4000K	10,500lm	350mA	140°	484x98x209	-
	15643	100W	6000K	10,000lm	350mA	140°	428x77x151	-
	15937	150W	4000K	15,750lm	350mA	140°	556x77x175	-

AC220-240V IP 65  CRI>70 PF>0.9

 SDCM <3  Class I  IK09 



LICEO


JABO

ECO-MIDI STREET LIGHT




Characteristics


- Housing is made of very anti corrosion resistant high pressure die-cast aluminium with polyester powder coated treatment.
- (NTC) Thermal management protect for LED module.
- Toughened glass with high light transmittance to optimize the light output ratio.
- Stainless steel bracket to secure the covering open position for maintenance.
- Integrated Surge protector (SPD) 10kV-10kA, type I / II, with LED signal and thermal fuse

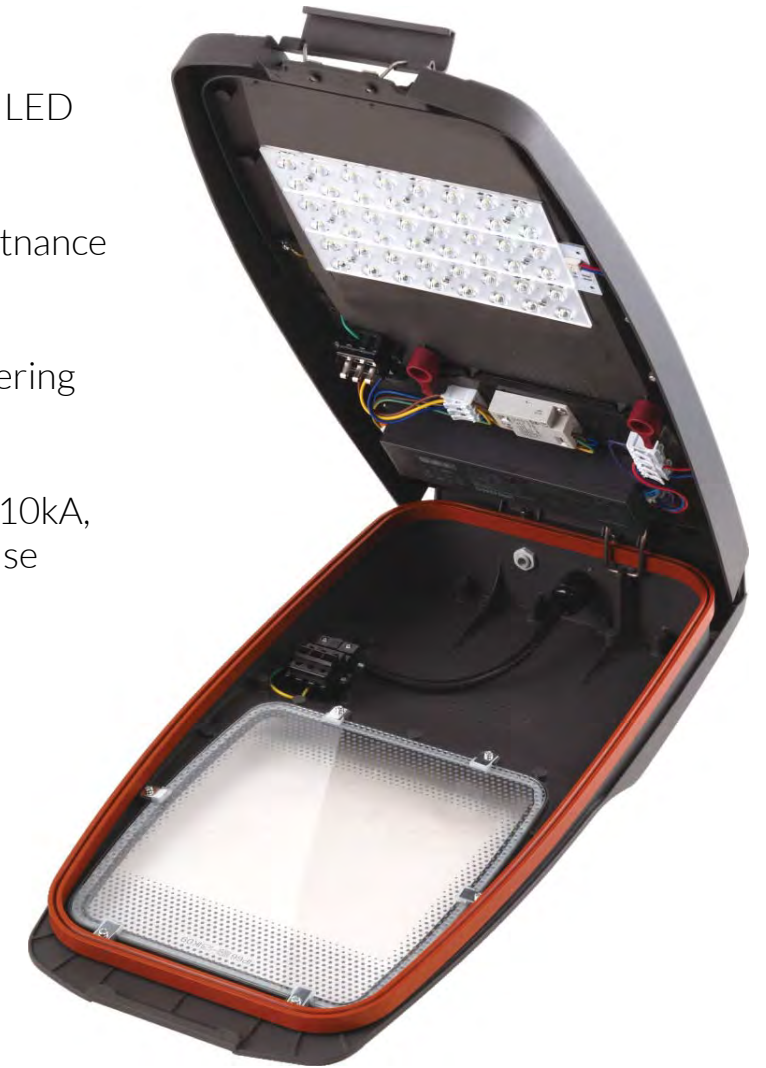

Horizontal Installation

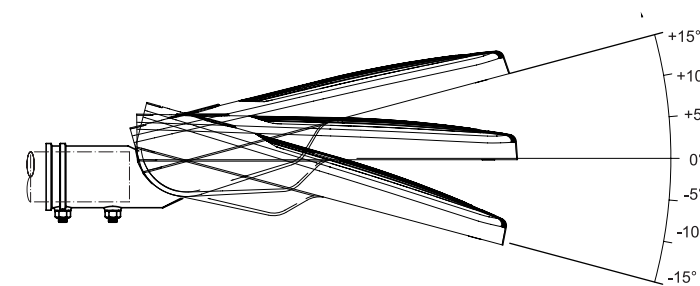

Post Top Installation

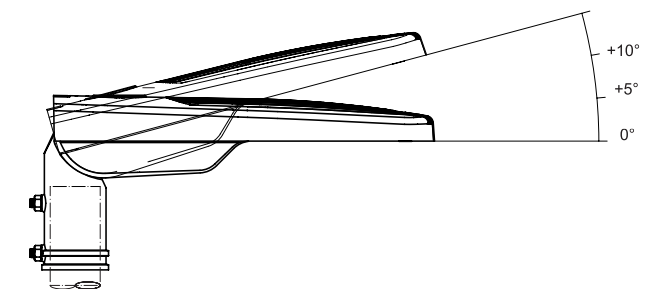

Product Specifications:

Lamp Type: CREELED
Driver: PHILIPS Driver
Installation Height: 6-14 M
Operating Temp.: -20°C ~ +50°C
Material: Die-cast aluminium+tempered glass
Finish: Dark Grey
Power Distribution: 2.5KV
Lifespan: 50,000 Hrs
Warranty: 5 Years
Applications: Pools, Fountains



Product Options:

Wattage: 51W to 137W
CCT: 3000K - 6000K
Control: Switchable / TRIAC / 0-10V / 1-10V / DALI / PWM
Mounting: Bracket or Post-top Ø60mm, Ø48mm (OPTIONAL) , Ø76mm (OPTIONAL)

	SKU	W	CCT	LM	mA	Beam	Size(mm)	Cut(mm)
Jabo	16723	103W	4000K	12,875lm	700mA	-	702x314x130	-
	16724	135W	4000K	16875lm	700mA	-	702x314x130	-

AC220-240V

IP66

60x60"

CRI>70



PF>0.9

SDCM <3

Class I

IK09



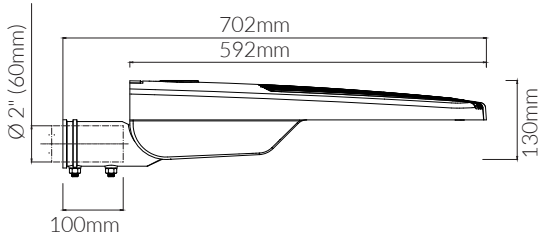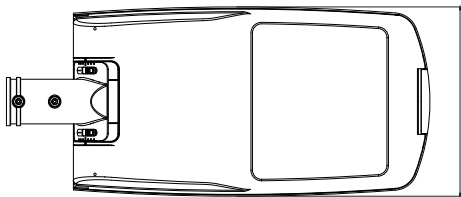



Lighting designed to elevate the way you
relax, entertain, and explore outdoors.

SYV ILUMINACIÓN EUROPEA S.L

