Floro
Spike light

Features

- Ultra-durable, Die cast solid case Brass
- spike light.
- Finish: Bronze finish
- Lens: Clear Flat Glass Lens
- LED wire: Pre-stripped H03RN-F 3*0.3mm², L=72"
- Spike: ABS

Spike

IK Rating
IK06

IP Rating
IP66

5 years warranty **Standard Warranty**

SYV Iluminacion Europea, Sociedad Limitada
Avda San Pablo 28 - 28820,
Cosloda (Madrid) Spain

© 2025 SYV

Floro

TECHNICAL DATA SHEET - FLORO - 21113 - SPIKE LIGHT

TECHNICAL DATA

Product Data	Spike Light
Lamp Type	SAMSUNG LED
Wattage	3W
Color Temperature	3000K
Rated Luminaire Luminous Flux	210lm
Rated Luminaire Efficiency	70lm/W
IP Rating	66
Beam Angle	38°
Input Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	0.9
SDCM	<3
Safety Class	Class II
Operating Temperature	-20°C ~ +50°C
Material	Die Cast Brass
Lens	Clear Flat Glass Lens
Finish	Bronze
Lifespan	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Gardens, Parks, etc.







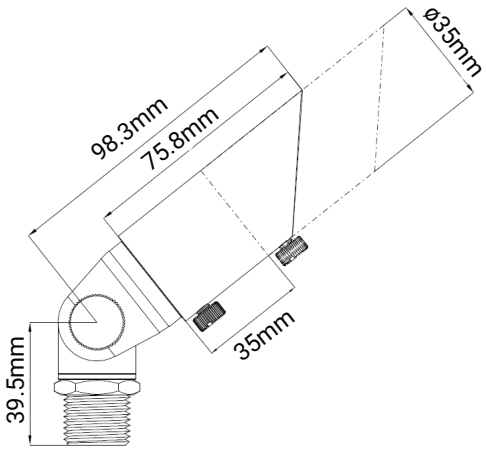

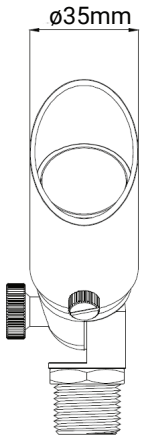

TECHNICAL OPTIONS

Wattage	6W / 12W
Color Temperature	2700K-6000K
Beam Angle	60° / 120°
Finish	Antique Bronze / Gun Metal Black / Matte Black
Control	Switchable, TRIAC, 1-10V, DALI,0-10V

OPTIONAL ACCESSORIES

Adjustable Shroud
SKU 21185



Surface Mounting Base
SKU 21159

SYV Iluminacion Europea, Sociedad Limitada
Avda San Pablo 28 - Naves 15 y 2 - 28820
Cosloda (Madrid) Spain
SYV Design is constantly developing and improving it's products. The right is reserved to change specification without prior notification or public announcement.