

Fargo

Tubular Linear Light



Features

- Fargo tubular lighting with special Non-dust collecting tubular design and IP69K high level water-proof function meets the stringent food industry hose-down criteria. The IK10 level shatter proof polycarbonate housing and stainless steel end cap makes the most reliable protection which is the ideal solution for food processing.

Application: Food processing, dairy processing, beverage processing, cold storage, slaughter house, bakery, medicine industry and clean room



IK Rating
IK10



IP Rating
IP69K

5 years
warranty

Standard Warranty

Configuration



Pendant



Ceiling






Wall

TECHNICAL DATA SHEET - FARGO - 21603 - TUBULAR LINEAR LIGHT



TECHNICAL DATA

Product Data	Tubular Linear Light
Lamp Type	OSRAM LED
Driver	BOKE
Wattage	36W
Color Temperature	4000K
Rated Luminaire Luminous Flux	5760lm
Rated Luminaire Efficiency	160lm/W
Beam Angle	120°
IP Rating	69K
Input Voltage	AC220-240V
Outout Voltage	DC180-264V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
SDCM (MacAdam)	<3
Safety Class	Class I
Operating Temperature	-20 ~+45°C
Service Life	L80/B10 104000h at +25°C
Material	Extruded PC/Aluminum
End Cap	Stainless steel 304
Finish	Silver
Life Span	50,000 Hours
Warranty	5 Years

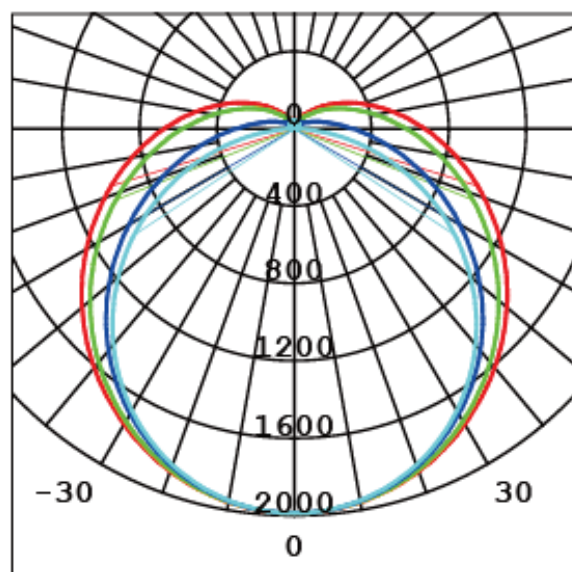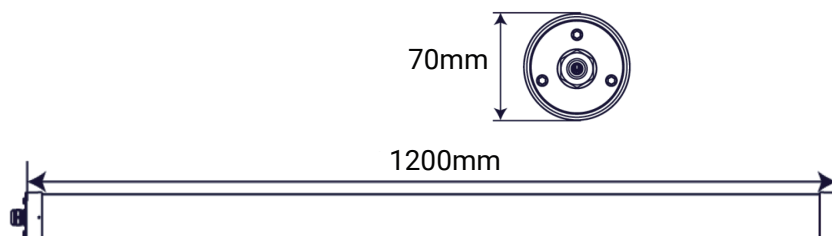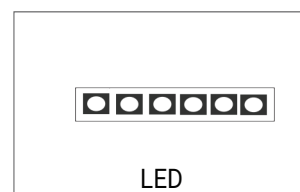

TECHNICAL OPTIONS

Wattage	48W
CCT	3000K - 6000K
Control	0~10V, DALI