

Asturia

Troffer panel light (CCT Changeable)



Features

- Designed for commercial and institutional spaces, this recessed troffer features a back-lit center basket with a SPCC Steel & polycarbonate diffuser, ensuring uniform, volumetric lighting that minimizes glare and prevents eyestrain.
- The LED troffer's energy-efficient design offers selectable color temperatures from 3000K to 6000K for versatile lighting.



Recessed



IP Rating
IP44



UGR
<16





Standard Warranty

TECHNICAL DATA SHEET - ASTURIA - 20575 - TROFFER PANEL LIGHT (CCT CHANGEABLE)



TECHNICAL DATA

Product Data	Troffer Panel light
Lamp Type	OSRAM LED
Driver	LIFUD
Wattage	40W
Color Temperature	3000K, 4000K, 6000K
Rated Luminaire Luminous Flux	4000lm, 4200lm, 4400lm
Rated Luminaire Efficiency	100lm/W, 105lm/W, 110lm/W
IP Rating	44
Beam Angle	90°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
UGR Rating	<16
Safety Class	Class II
Operating Temperature	-20°C ~ +45°C
SDCM(Macadam step)	<3
Material	SPCC steel, PC & Aluminun
Finish	White & Silver
Life Span	60,000 Hours
Warranty	6 Years
Applications	Residential, Commercial, Hospitality

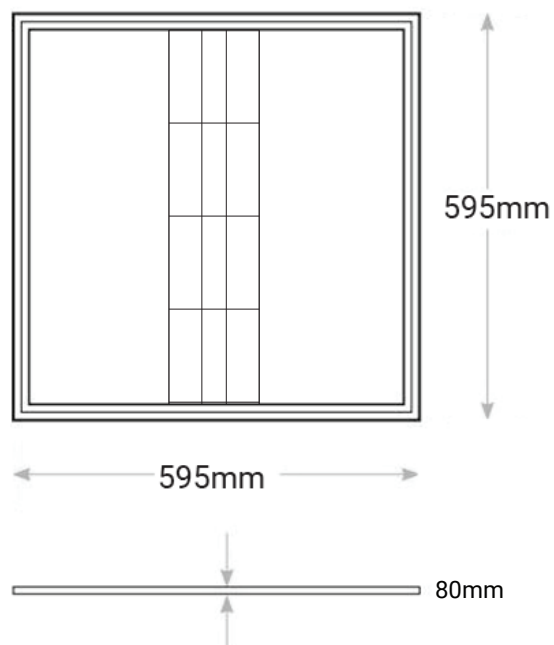

TECHNICAL OPTIONS

Wattage	26W / 30W / 36W
Control	On/OFF, TRIAC, 1-10V, Dali, 0-10V
Configuration	Surface Mount, Suspended
Optional	Emergency Kit