

Clavo

Flood/Spike light



Features

- 12# Die-casting dark grey powder coated aluminum
- Tempered glass.T=3mm
- Constant Voltage Input,Constant Current Output
- Gasket: Tooling shaped seal Gasket



Surface



IP Rating
IP66



IK Rating
IK06





Standard Warranty

TECHNICAL DATA SHEET - CLAVO - 15122 - FLOOD/SPIKE LIGHT



TECHNICAL DATA

Product Data	Flood/Spike Light
Lamp Type	OSRAM LED
Wattage	20W
Color Temperature	3000K
Rated Luminaire Luminous Flux	1,800lm
Rated Luminaire Efficiency	90lm/W
IP Rating	66
Beam Angle	45°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Lens	B33D
Operating Current	101mA
IK Rating	06
Safety Class	Class I
Operating Temperature	-20°C ~+50°C
Material	Aluminium Body
Finish	Dark Grey
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Residential, Hospitality, etc.

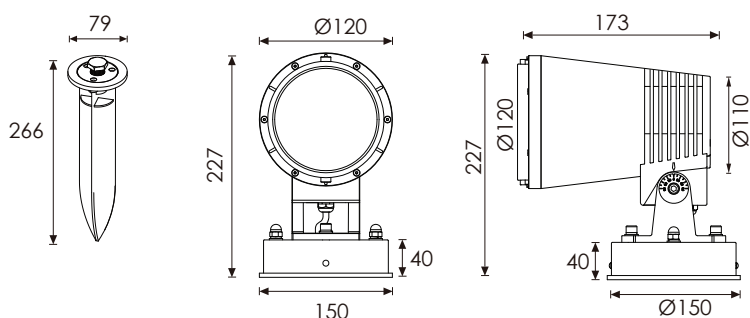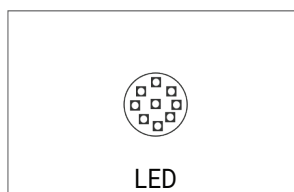

Unit: mm

Lux distance cure

Illuminance at a distance				
Center beam LUX		Beam width		
		V	H	
2m	2163.93 LUX	0.8m	0.8m	
4m	540.98 LUX	1.6m	1.6m	
6m	240.44 LUX	2.5m	2.4m	
8m	135.25 LUX	3.3m	3.2m	
10m	86.56 LUX	4.1m	4.0m	
12m	60.11 LUX	4.9m	4.8m	
Ver.Spread:23.2		Horiz.Spread:22.8		

TECHNICAL OPTIONS

Wattage	6W / 12W / 40W
Color Temperature	3000K - 6000K
Beam Angle	9°/15°/20°/30°
Finish	Silver Grey/Black/White
Control	Switchable/TRIAC/DALI/1-10V/PWM