

## Clavo

### Flood/Spike light



### Features

- 12# Die-casting dark grey powder coated aluminum
- Tempered glass.T=3mm
- Constant Voltage Input,Constant Current Output
- Gasket: Tooling shaped seal Gasket



Surface



IK Rating  
IK06



IP Rating  
IP66





Standard Warranty

## TECHNICAL DATA SHEET - CLAVO - 15123 - FLOOD/SPIKE LIGHT



### TECHNICAL DATA

<b>Product Data</b>	Flood/Spike Light
<b>Lamp Type</b>	OSRAM LED
<b>Wattage</b>	45W
<b>Color Temperature</b>	3000K
<b>Rated Luminaire Luminous Flux</b>	4,050lm
<b>Rated Luminaire Efficiency</b>	90lm/W
<b>IP Rating</b>	66
<b>Beam Angle</b>	45°
<b>Voltage</b>	AC220-240V
<b>Frequency Range</b>	50-60 Hz
<b>CRI</b>	Ra>80
<b>Power Factor</b>	>0.9
<b>Lens</b>	B33D
<b>Operating Current</b>	186mA
<b>IK Rating</b>	06
<b>Safety Class</b>	Class I
<b>Operating Temperature</b>	-20°C ~+50°C
<b>Material</b>	Aluminium Body
<b>Finish</b>	Dark Grey
<b>Life Span</b>	50,000 Hours
<b>Warranty</b>	5 Years
<b>Applications</b>	Outdoors, Residential, Hospitality, etc.

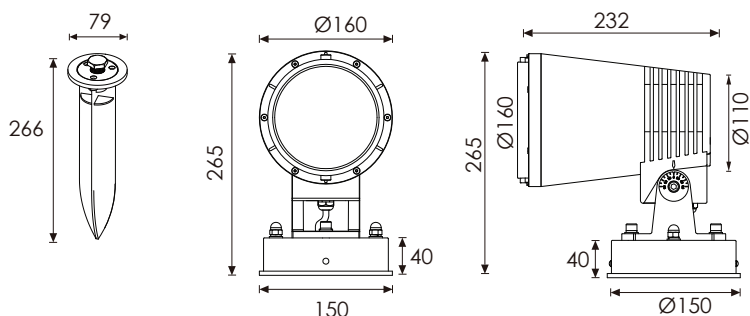

Unit: mm

### Lux distance cure

	Illuminance at a distance		Beam width	
	Center beam LUX	Beam width V	H	
2m	3968.45 LUX	0.8m	0.8m	
4m	992.11 LUX	1.7m	1.6m	
6m	440.94 LUX	2.5m	2.4m	
8m	248.03 LUX	3.3m	3.2m	
10m	158.74 LUX	4.1m	4.0m	
12m	110.23 LUX	5.0m	4.8m	

Ver.Spread:23.4 Horiz.Spread:22.8

### TECHNICAL OPTIONS

<b>Wattage</b>	6W / 12W / 20W
<b>Color Temperature</b>	3000K - 6000K
<b>Beam Angle</b>	9°/15°/20°/30°
<b>Finish</b>	Silver Grey/Black/White
<b>Control</b>	Switchable/TRIAC/DALI/1-10V/PWM