


Faro

Ceiling light with Motion Sensor



Features

- Slim IP66 Round surface mounted LED luminaire
- High quality Driver & capacitor ensuring excellent working performance
- White Polycarbonate body
- Suitable for a wide range of commercial and residential applications.

 **Surface**

 **IP Rating**
IP66

Colour Rendering Index
≥80




5 years **Standard Warranty**
warranty

TECHNICAL DATA SHEET - FARO - 15188 - CEILING LIGHT WITH MOTION SENSOR



TECHNICAL DATA

Product Data	Surface Mounted light
Lamp Type	SMD 2835 LED
Wattage	20W
Color Temperature	6500K
Rated Luminaire Luminous Flux	2000lm
Rated Luminaire Efficiency	100lm/W
IP Rating	66
Beam Angle	120°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Operating Temperature	-20°C ~ +60°C
IK Rating	08
Safet Class	Class II
Hold Time	5s/1min/2min/3min
Sensing Range	50% / 100%
Daylight Sensor	25 lux/disbale
Mounting Height	Ceiling Mount: 2.5 - 6m
Detection Area	4-10m (Mounting Height - 3m)
Material	Polycarbonate Body With PC Diffuser
Finish	White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Residential, Commercial, Hospitality etc.

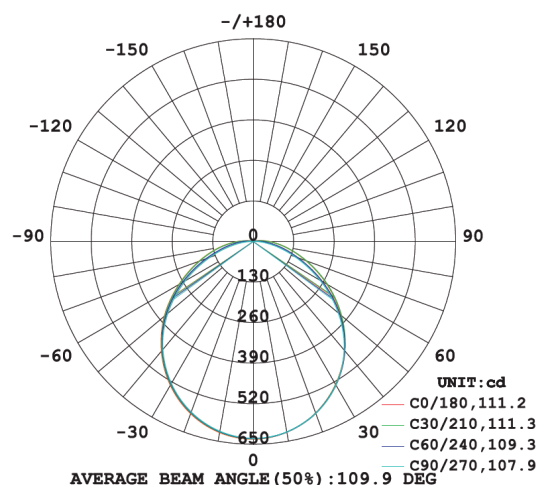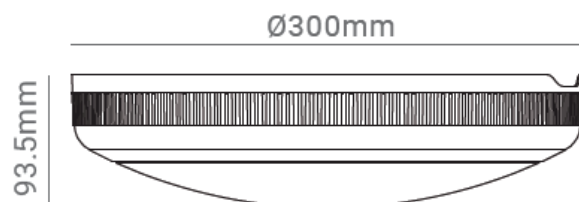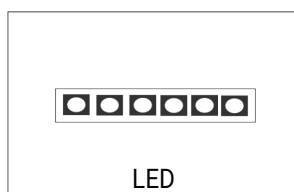

TECHNICAL OPTIONS

Wattage	14W / 30W
Color Temperature	3000K-6000K
Finish	Black
Control	Switchable, DALI, TRIAC, 0-10V