

## Esfera

### Recessed Downlight



### Features

- New appearance with high performance, more compact, more professional
- High quality PMMA diffuser distribution soft light
- Imported reflected paper with 96% reflective rate
- Textured white finish perfect match with your ceiling
- Aluminium alloy anti-glare front ring

 **Recessed**

 **UGR**  
**<21**

 **IP Rating**  
**IP44**



**5** years  
warranty **Standard Warranty**

## TECHNICAL DATA SHEET - ESFERA - 15297 - RECESSED DOWNLIGHT



### TECHNICAL DATA

Product Data	Recessed Downlight
Lamp Type	BRIDGELUX LED
Wattage	20W
Color Temperature	4000K
Rated Luminaire Luminous Flux	1900lm
Rated Luminaire Efficiency	95lm/W
IP Rating	44
Beam Angle	80°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.95
SDCM(Macadam step)	< 7
Output Current (mA)	500mA
Safety Class	Class II
Operating Temperature	-20°C ~ +40°C
Material	Aluminium + PMMA Milky Diffuser
Finish	White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Residential, Commercial, Hospitality etc.

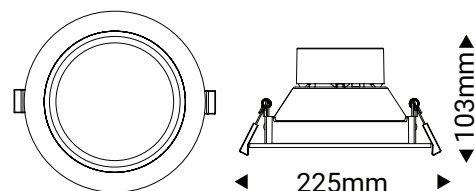

Cutout: Ø210mm

### TECHNICAL OPTIONS

Wattage	8W / 12W / 16W
Color Temperature	3000K-6000K
Control	Switchable/TRIAC/0-10V/DALI/1-10V

