

Caer

Recessed Downlight



Features

- Selected LED chip with efficient driver
- Frosted cover with high transmittance, offering uniform and comfortable light
- Excellent heat dissipation design for good heat dissipation to extend the lifespan of the lamp
- Housing material: Aluminum with good performance
- Powder coated surface treatment is durable and not easy to fall off

 **Recessed**



IP Rating
IP65



UGR
<24





Standard Warranty

TECHNICAL DATA SHEET - CAER - 15586 - RECESSED DOWNLIGHT




TECHNICAL DATA

Product Data	Recessed Downlight
Lamp Type	SAMSUNG LED
Wattage	30W
Color Temperature	6000K
Rated Luminaire Luminous Flux	3000lm
Rated Luminaire Efficiency	90lm/W
IP Rating	65
Beam Angle	90°
Voltage	AC220-240V
Ouput Voltage	32-42V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.95
SDCM(Macadam step)	< 4
Max Current (mA)	180mA
Output Current	630~770mA
THD (%)	≤20%
Safety Class	Class II
UGR	<24
Operating Temperature	-20°C ~ +40°C
Material	Die Cast Aluminium Body
Finish	White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Residential, Commercial, Hospitality etc.

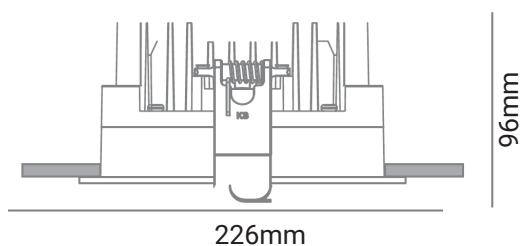

Cutout: 200-215mm

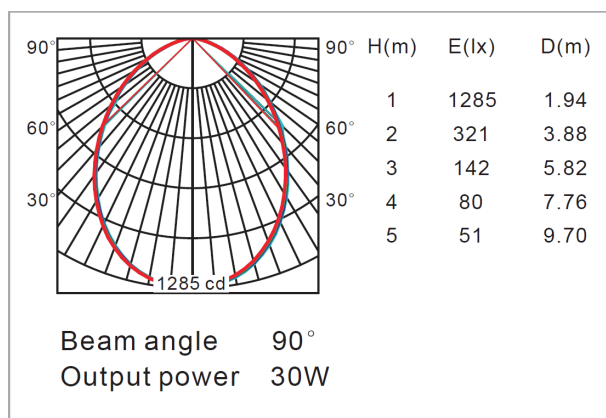

TECHNICAL OPTIONS

Wattage	40W(42W) / 50W
Color Temperature	3000K-6000K
Control	Switchable, TRIAC, 1-10V, DALI,0-10V