

Centro Flood light



Features

- The compact design of structure save the shipping cost at most maintaining the superb heat dissipation ability
- Adjustable projecting angle, easy to dismantle and maintain
- More widely usage fields
- DE/UL listed 3*1.0mm² rubber cable with cold-pressed terminal.



Surface



IP Rating
IP65

Colour Rendering Index
≥70

5 years
warranty





Standard Warranty

TECHNICAL DATA SHEET - CENTRO - 15997 - FLOOD LIGHT



TECHNICAL DATA

Product Data	Flood Light
Lamp Type	PHILIPS LED
Wattage	100W
Color Temperature	5000K
Rated Luminaire Luminous Flux	13000lm
Rated Luminaire Efficiency	130lm/W
IP Rating	65
Beam Angle	110°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>70
Power Factor	>0.95
SDCM	<5
IK Rating	08
Operating Temperature	-20 °C to +50 °C
Surge	10KV
Safety Class	Class I
Alignment	0° ~ 270°
Material	Die cast aluminium body +Tempered glass
Finish	Matte Black
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Commercial, Hospitality etc.

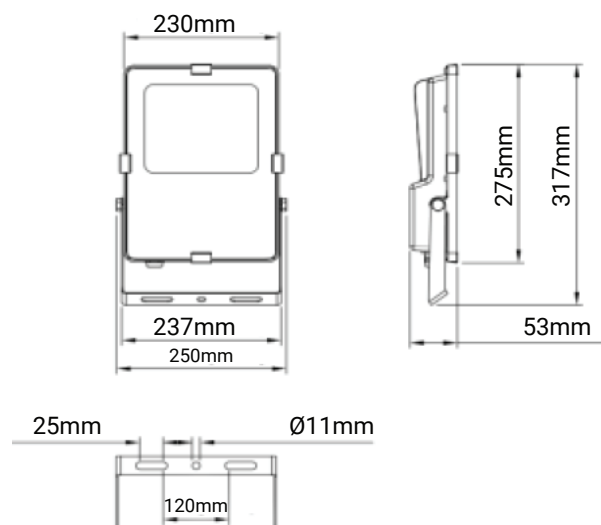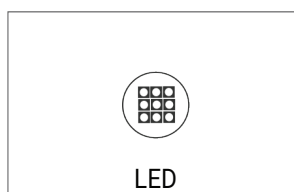

TECHNICAL OPTIONS

Wattage	50W/80W/150W/200W/250W
Color Temperature	3000K - 6000K
Control	Switchable, 1-10V, DALI
Sensor	PIR Sensor