

Nube

Panel light



Features

- Energy saving up to 40% compared to conventional light sources
- Even light distribution, low flicker, no yellowing
- Low glare diffuser UGR < 19
- Additional energy saving through proximity sensor/ daylight harvesting
- Flame resistant diffuser TP(a) / UL94 V0
- Emergency battery 3W * 3 hours

 **Recessed**

 **IP Rating**
IP44

 **UGR**
<19



5 years
warranty **Standard Warranty**

TECHNICAL DATA SHEET - NUBE - 16166 - PANEL LIGHT



TECHNICAL DATA

| | |
|-------------------------------|---|
| Product Data | Panel light |
| Lamp Type | BRIDGELUX LED |
| Driver | LIFUD Driver |
| Wattage | 40W |
| Color Temperature | 4000K |
| Rated Luminaire Luminous Flux | 3800lm |
| Rated Luminaire Efficiency | 95lm/W |
| IP Rating | 44 |
| Beam Angle | 120° |
| Voltage | AC220-240V |
| Frequency Range | 50-60 Hz |
| CRI | Ra>80 |
| Power Factor | >0.9 |
| Output Current | 1000mA |
| UGR Rating | <19 |
| Safety Class | Class III |
| Operating Temperature | -20°C ~ +40°C |
| SDCM(Macadam step) | < 6 |
| Material | Steel, Aluminium, PS |
| Finish | White |
| Life Span | 50,000 Hours |
| Warranty | 5 Years |
| Applications | Residential, Commercial, Hospitality etc. |

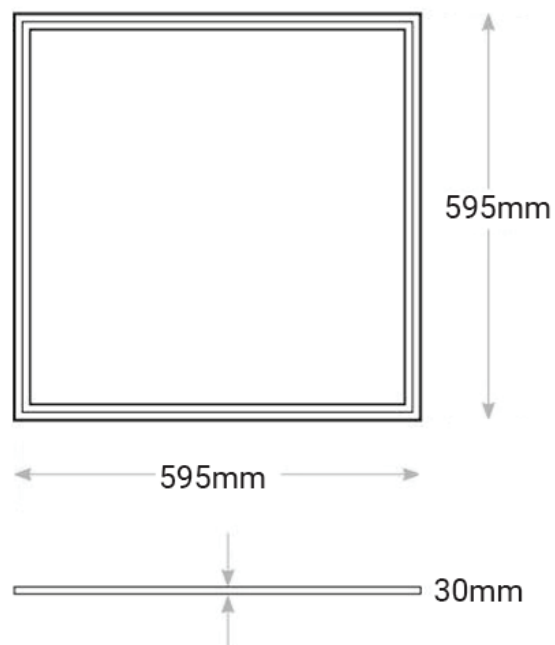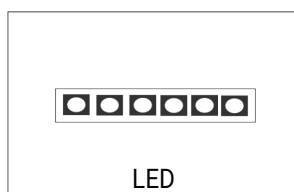

TECHNICAL OPTIONS

| | |
|-------------------|---------------------------------------|
| Wattage | 18W, 24W, 36W, 72W |
| Color Temperature | 3000K-5000K |
| Control | Switchable, TRIAC, 1-10V, Dali, 0-10V |