

Paleto

Bollard & Pathway light



Features

- Paleto is a comfortable window of light every step of the way.
- Housing: Die Cast aluminum body with a safety glass & screws in stainless steel
- Optional LED color temperature



Bollard



IP Rating
IP65

Colour Rendering Index
≥80





5 years Standard Warranty
warranty

TECHNICAL DATA SHEET - PALETO - 16398 - BOLLARD & PATHWAY LIGHT



TECHNICAL DATA

Product Data	Bollard & Pathway light
Lamp Type	COB LED
Driver	In-Built Driver
Wattage	24W
Color Temperature	3000K
Rated Luminaire Luminous Flux	2880lm
Rated Luminaire Efficiency	120lm/W
IP Rating	65
Voltage	AC100-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Operating Temperature	-20°C ~+50°C
Material	Die Cast Aluminium
Finish	Dark Grey
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Residential, Commercial, Hospitality etc.

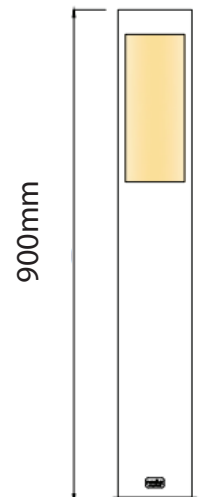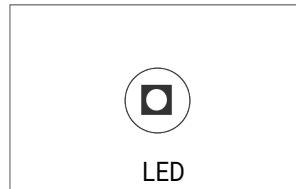

TECHNICAL OPTIONS

Color Temperature	3000K - 6000K
Control	Switchable, TRIAC, 0-10V, 1-10V, Dali