

## Faro

### Ceiling light with Dimming Sensor



### Features

- Slim IP66 Round surface mounted LED luminaire
- High quality Driver & capacitor ensuring excellent working performance
- White Polycarbonate body
- Suitable for a wide range of commercial and residential applications.



**Surface**



**IP Rating**  
IP66

**Colour Rendering Index**  
≥80

**5**  
years  
warranty




**Standard Warranty**

## TECHNICAL DATA SHEET - FARO - 16751 - CEILING LIGHT WITH DIMMING SENSOR



### TECHNICAL DATA

Product Data	Surface Mounted light
Lamp Type	BRIDGELUX LED
Wattage	20W
Color Temperature	4000K
Rated Luminaire Luminous Flux	1800lm
Rated Luminaire Efficiency	90lm/W
IP Rating	66
Beam Angle	120°
Voltage	AC220-240V
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.9
Operating Temperature	-20°C ~ +60°C
IK Rating	08
Safety Class	Class II
Output Current	300/350mA
Control	Dimmable
Sensor	Built-in Motion Sensor
Hold Time	5S/1min/5min/10min
Daylight sensor	5lux / 25lux /50lux / Disable
Standby period	0S/ 1min/ 10min/ +∞
Standby DIM level	10% /25%
Detection Area	50%/100%
Material	Polycarbonate Body With PC Diffuser
Finish	White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Outdoors, Residential, Commercial, Hospitality etc.

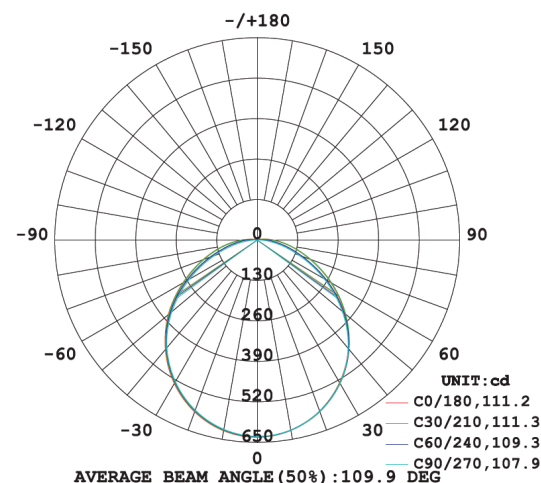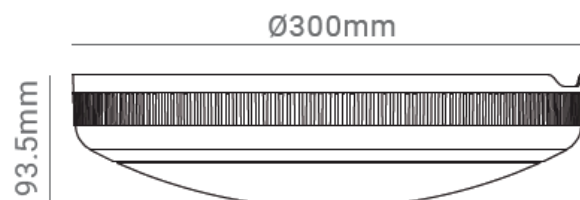

### TECHNICAL OPTIONS

Wattage	14W / 30W
Color Temperature	3000K-6000K
Finish	Black
Control	Switchable, DALI, TRIAC, 0-10V
Options	3 Hours Emergency Back-up Kit