

## Piatto Flood light



### Features

- High-strength die-cast aluminum with high-definition tempered glass structure
- Rotatable mounting base, can be rotated 90° in the vertical direction, easy to adjust the projection angle
- Highly reliable heat dissipation design
- Ultra-low power consumption and long life
- Very good thermal performance



Surface



IK Rating  
IK08




IP Rating  
IP66






Standard Warranty

## TECHNICAL DATA SHEET - PIATTO - 16764 - FLOOD LIGHT

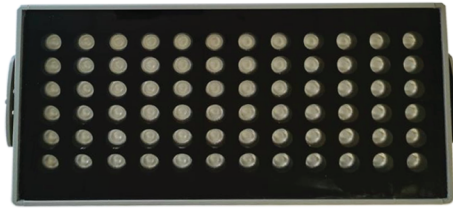

### TECHNICAL DATA

<b>Product Data</b>	Flood Light Module
<b>Lamp Type</b>	CREE LED
<b>Driver</b>	Meanwell Driver
<b>Wattage</b>	150W
<b>Color Temperature</b>	Blue
<b>Rated Luminaire Luminous Flux</b>	13,500lm
<b>Rated Luminaire Efficiency</b>	90lm/W
<b>IP Rating</b>	66
<b>Beam Angle</b>	90°
<b>Voltage</b>	AC220-240V
<b>Frequency Range</b>	50-60 Hz
<b>CRI</b>	Ra>80
<b>Power Factor</b>	>0.8
<b>Current</b>	600mA
<b>Ambient Temperature</b>	-25°C ~ +50°C
<b>IK Rating</b>	08
<b>Safety Class</b>	Class I
<b>Material</b>	Die Cast Aluminium with Tempered Glass
<b>Finish</b>	Dark Grey
<b>Life Span</b>	50,000 Hours
<b>Warranty</b>	5 Years
<b>Applications</b>	Outdoors, Signage & Billboards, Area lighting

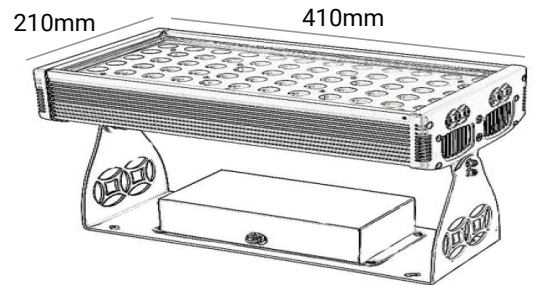

### TECHNICAL OPTIONS

<b>Color Temperature</b>	3000K - 6000K
<b>Control</b>	Switchable, TRIAC, DALI, 1-10V, 0-10V