

Ostra

Ceiling light



Features

- Ostra adopts high lumen SMD2835 LED, high light transmission polycarbonate diffuser with even light output
- It is competitive in quality and price with energy saving more than 75%-90%
- High efficiency and low energy consumption.



Surface



IP Rating
IP54

Colour Rendering Index
≥80

5 years
warranty



Standard Warranty

TECHNICAL DATA SHEET - OSTRÁ - 16823 - CEILING LIGHT



TECHNICAL DATA

Product Data	Ceiling light
Lamp Type	PHILIPS SMD 2835 LED
Driver	LIFUD DRIVER
Wattage	10W
Color Temperature	3000K
Rated Luminaire Luminous Flux	900lm
Rated Luminaire Efficiency	90lm/W
IP Rating	54
Beam Angle	120°
Voltage	230V AC
Frequency Range	50-60 Hz
CRI	Ra>80
Power Factor	>0.5
Energy Efficiency Class	A+
Operating Temperature	-20°C ~ +40°C
Material	Polycarbonate Body
Finish	White
Life Span	50,000 Hours
Warranty	5 Years
Applications	Residential, Commercial, Hospitality etc.

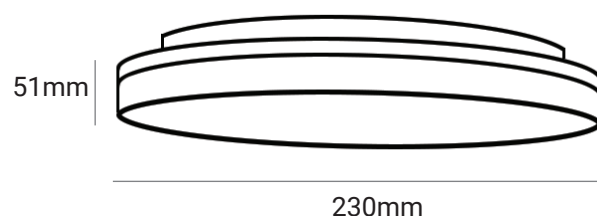

TECHNICAL OPTIONS

Wattage	18W / 24W
Color Temperature	2700K - 6500K
Control	Switchable, 0-10V, 1-10V, TRIAC, DALI