



## Oreo Recessed Spotlight

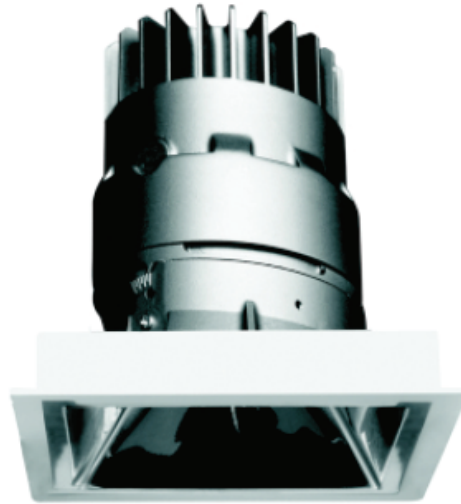


### Features

- High quality citizen cob led
- Universally adjustable, 0-30° in vertical, and 360° in horizontal
- Modularity structure, easier to assemble, install and disassemble, no damage to the ceiling floor
- Family structure appearance design to meet with the uniform aesthetic requirement
- Easy Installation


 Recessed

 IP Rating  
IP20

 UGR  
<19




 5 years  
warranty **Standard Warranty**

## TECHNICAL DATA SHEET - OREO - RECESSED SPOTLIGHT

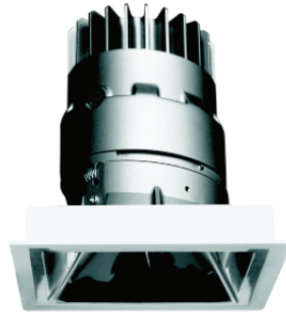


### TECHNICAL DATA

<b>Product Data</b>	Spot light
<b>Lamp Type</b>	CITIZEN LED
<b>Driver</b>	OSRAM Driver
<b>Rated Luminaire Efficiency</b>	Upto 80lm/W
<b>Color Temperature</b>	2700k/3000k/4000k
<b>IP Rating</b>	20
<b>Beam Angle</b>	36°
<b>Voltage</b>	AC220-240V
<b>Output Voltage</b>	DC33V
<b>Frequency Range</b>	50-60 Hz
<b>CRI</b>	Ra>90
<b>Power Factor</b>	>0.95
<b>SDCM</b>	< 3
<b>Safety Class</b>	Class III
<b>Operating Temperature</b>	-20 ~ +50°C
<b>Material</b>	Aluminum Body
<b>Finish</b>	White
<b>Life Span</b>	50,000 Hours
<b>Warranty</b>	5 Years
<b>Applications</b>	Residential, Commercial, Hospitality

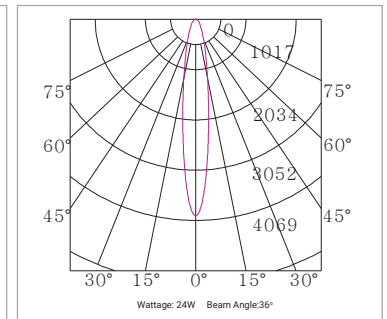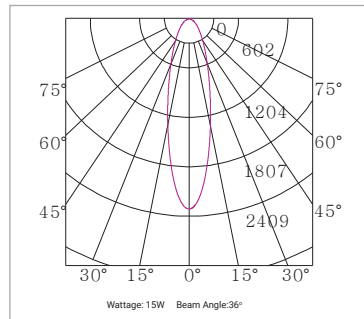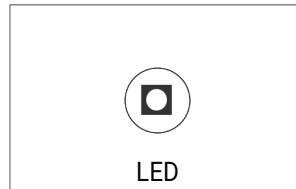

### TECHNICAL OPTIONS


<b>Wattage</b>	15W / 24W
<b>Beam Angle</b>	12°, 24°
<b>Finish</b>	Black
<b>Control</b>	Switchable, DALI, TRIAC, 1-10V

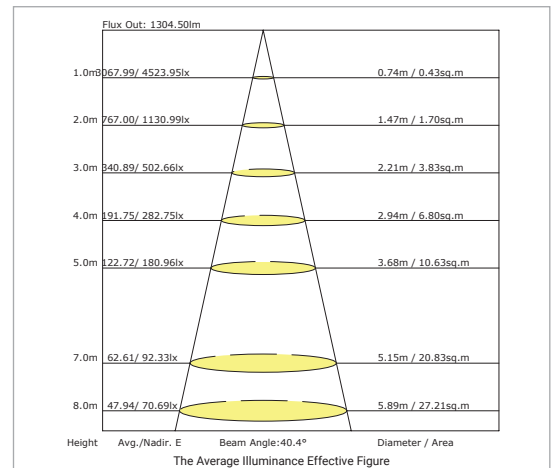



## TECHNICAL DATA SHEET - OREO - RECESSED SPOTLIGHT

SKU	Wattage	CCT	Lumen	Output Current	Dimension(mm)
16576	15W	2700K	1115lm	400mA	119x120
16575	15W	3000K	1148lm	400mA	119x120
16568	15W	4000K	1315lm	400mA	119x120
16574	24W	2700K	1671lm	560mA	140x139
16573	24W	3000K	1833lm	560mA	140x139
16569	24W	4000K	1924lm	560mA	140x139


**15W**

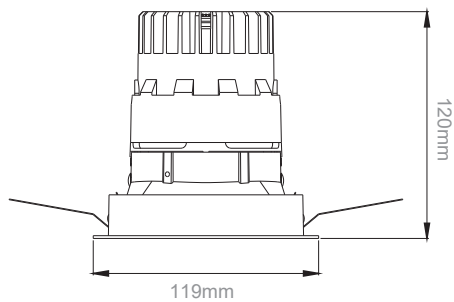

**24W**

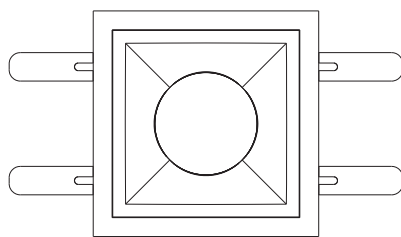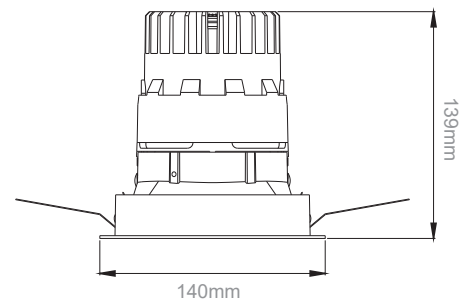

Cutout: 105x105mm  
Ceiling Spec: 8-15mm Thick

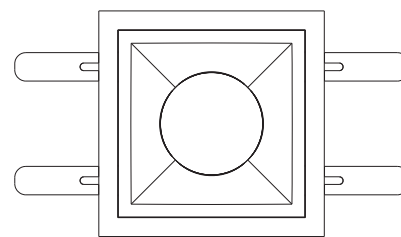

Cutout: 125x125mm  
Ceiling Spec: 8-15mm Thick