

Instruction Manual

PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION

Item: Corzo

Spee: Aluminium 10W/12W/15W/18W/20W/25W LED SPOT UGHT, IP67, 220-240V AC

Note: • Always switch off the mains supply before installation.

For Solid Ground Mounting

1. Fix the bracket on the position by anchors and wooden screws. (See Fig 1.1)
2. Connect the main supply cable via waterproof Junction box or connector. Connect the light fitting cable to the Junction box (See Fig 1.2)
CAUTION: MUST USE IP67 OR IP68 JUNCTION BOX.
3. Switch on the mains supply, check and make sure the light fitting Is on.




Fig 1.1




Fig 1.2

For Soft Ground Mounting (An Additional Spike is Necessary)

1. Remove the MS screw from spike (See Fig 2.1)
2. Insert the spike the Into ground, fix the bracket on the top of spike by the MS screw. (See Fig 2.2)
3. Connect the main supply cable via waterproof junction box or connector.
Connect the light fitting cable to the junction box (See Fig 2.3)
CAUTION: MUST USE IP67 OR IP68 JUNCTION BOX.
4. Switch on the mains supply, check and make sure the light fitting Is on.



Fig 2.1



Fig 2.2

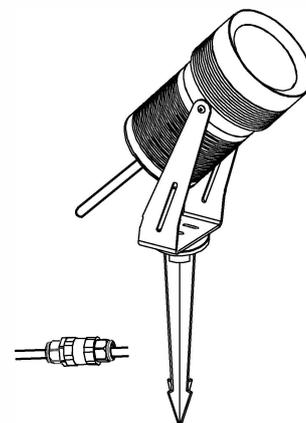


Fig 2.3

CAUTION:

ALL THE INSTALLATION MUST BE COMPLETED BY A QUALIFIED ELECTRICIAN!