

Vicar

Mini Wall Washer Strip Light



Features

- The Vicar wall washer features a slender compact design of 16mm width to carry the optic lens and thus wash a 3-4 meter high wall.
- It is IP65, DC24V bendable optics 30°, and cuttable at minimal length section of 41.66mm.
- Applications: Washing walls, dome, curtains, circle ceiling, arch bridge, curved guardrail.



5M Roll

Colour Rendering Index
≥90



IP Rating
IP65

5
years
warranty


Standard Warranty

TECHNICAL DATA SHEET - VICAR - 19973 - MINI WASHER STRIP LIGHT



TECHNICAL DATA

Product Data	Strip Light
Lamp Type	Lumileds
LED Qty	48LEDs/M
Wattage	16W/mtr
Color Temperature	3000K
Rated Luminaire Luminous Flux	960lm
Rated Luminaire Efficiency	60lm/W
IP Rating	65
Beam Angle	30°
Voltage	DC24V
Safety Class	Class II
Frequency Range	50-60 Hz
CRI	Ra>90
Power Factor	>0.9
SDCM	<3
Operating Temperature	-25°C ~ +55°C
Material	Silicone Body
Life Span	50,000 Hours
Warranty	5 Years
Applications	Residential, Commercial, Hospitality etc.

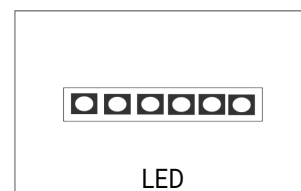


TECHNICAL OPTIONS

Color Temperature	2700K - 6000K
Control	TRIAC/1-10V/DALI/0-10V

TECHNICAL DATA SHEET - VICAR - 19973 - MINI WASHER STRIP LIGHT

DIMENSIONS



TOP VIEW

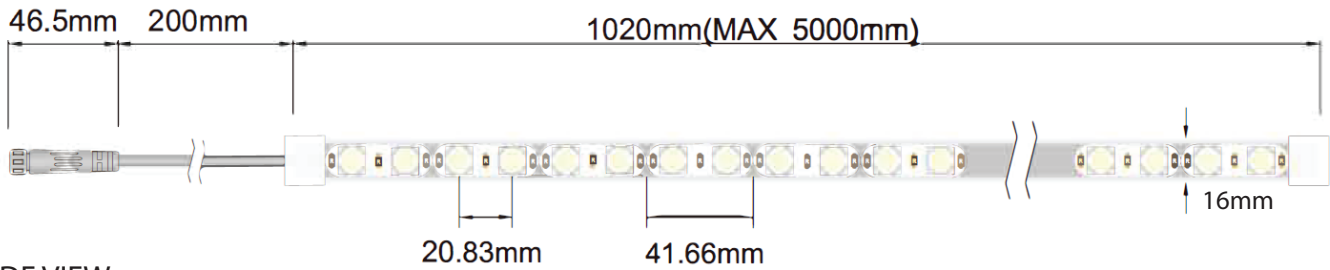


SIDE VIEW



BOTTOM VIEW



Diameter radius




Lateral bending




bending


INSTALLATION DISTANCE




D: 50mm



D: 100mm



D: 200mm



D: 300mm