

Baum

Bollard & Pathway Light



Features

- A stylish futuristic & a sleek appearance bollard light equipped with LED
- An extremely economic and effective outdoor light that provides light where it's needed most, especially on entrances, pathways and around the perimeters of buildings.



Bollard



IP Rating
IP65



IK Rating
IK06

3 years
warranty



Standard Warranty

TECHNICAL DATA SHEET - BAUM - 13800- BOLLARD & PATHWAY LIGHT




TECHNICAL DATA

Product Data	Bollard & Pathway light
Lamp Type	BRIDGELUX LED
Wattage	8W
Color Temperature	3000K
Rated Luminaire Luminous Flux	720lm
Rated Luminaire Efficiency	90lm/W
IP Rating	65
Beam Angle	113°
Voltage	AC220-240V
Frequency Range	50/60Hz
CRI	Ra>80
Power Factor	>0.9
Output Current	350mA
SDCM (MacAdam)	< 5
Operating Temperature	-20°C ~ +50°C
IK Rating	06
Safety Class	Class I
Material	Aluminium Body + Opal PC Diffuser
Finish	Dark Grey
Lifespan	30,000 Hours
Warranty	3 Years
Applications	Outdoors, Residential, Commercial, Hospitality etc.

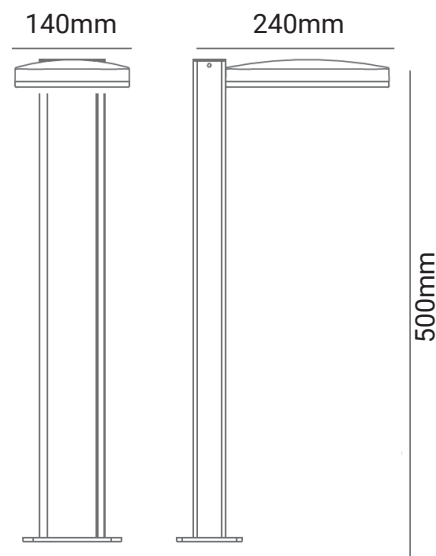

TECHNICAL OPTIONS

Color Temperature	4000K / 6000K
Finish	Black / White / Rust
Control	Switchable, TRIAC, 1-10V, Dali

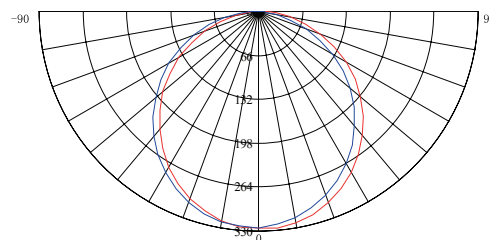

☑ C0 Plane beam angle(50%): 112.8 ☑ C90 Plane beam angle(50%): 112.0